


# Hybrid Pro 20x20 Modular Island Kit 23

## HP-K-23

Hybrid Pro™ Modular Kit 23 is a sophisticated and symmetrical 20ft x 20ft island exhibit, perfect for an exhibitor looking for features and functionality. Kit 23 features a heavy-duty aluminum extrusion center frame that supports two square-shaped fabric structures.

The top fabric structure is a tube structure with pillowcase fabric graphics and is meant to display your company logo so all in the exhibit hall can see it from afar! The center square utilizes the extrusion posts to create an additional area for branding and messaging above eye-level. Two 8ft tall floor displays add features and functionality. With medium monitor mounts and three shelves for small product display on each, the floor-based displays are designed to show and communicate your service offering in digital form and your product in physical form. Counters near the center posts add areas for storage and reception.

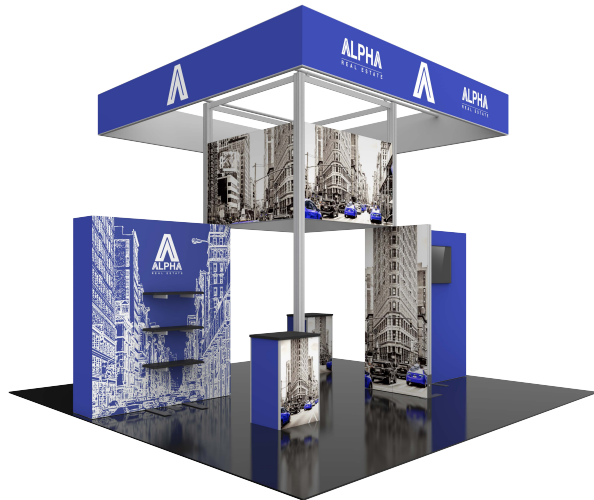

## features and benefits:

- 14'4" tall island display
- No rigging required
- Features two square fabric structures up high to draw visitors to the booth
- Floor based backwalls feature push-fit fabric
- Center counters add storage and reception areas
- Ships freight in a woodcrate
- Medium monitor bracket on center wall holds 32-55" LCD\*, max weight: 80 lbs
- \*Monitors & flooring are not included

## dimensions:

### Hardware

### Graphic

### Assembled unit:

244.33" w x 171.5" h x 168" d  
6206mm(w) x 4357mm(h) x 4268mm(d)

Approximate weight: 1130 lbs / 513 kg

Refer to related graphic template for more information.

Visit:

<https://www.theexhibitorshandbook.com/download-graphic-templates>

### Shipping

Packing case(s): WOODCRATE-H

101" w x 53" h x 50" d  
2566mm(w) x 1347mm(h) x 1270mm(d)

Approximate total shipping weight:  
1510 lbs / 684 kg

## additional information:

Graphic material:

Dye-sublimation SEG push-fit fabric

When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.

### Tabletop Colors:



silver black mahogany natural



**3 person assembly recommended:**



This product may include the following materials for recycle:  
aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.



R-HP-K-23

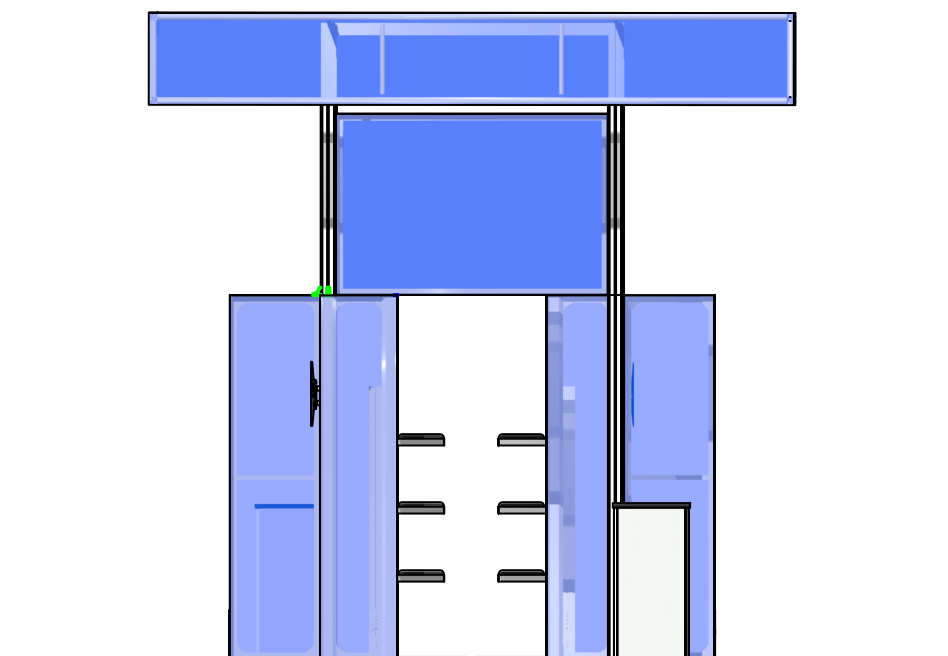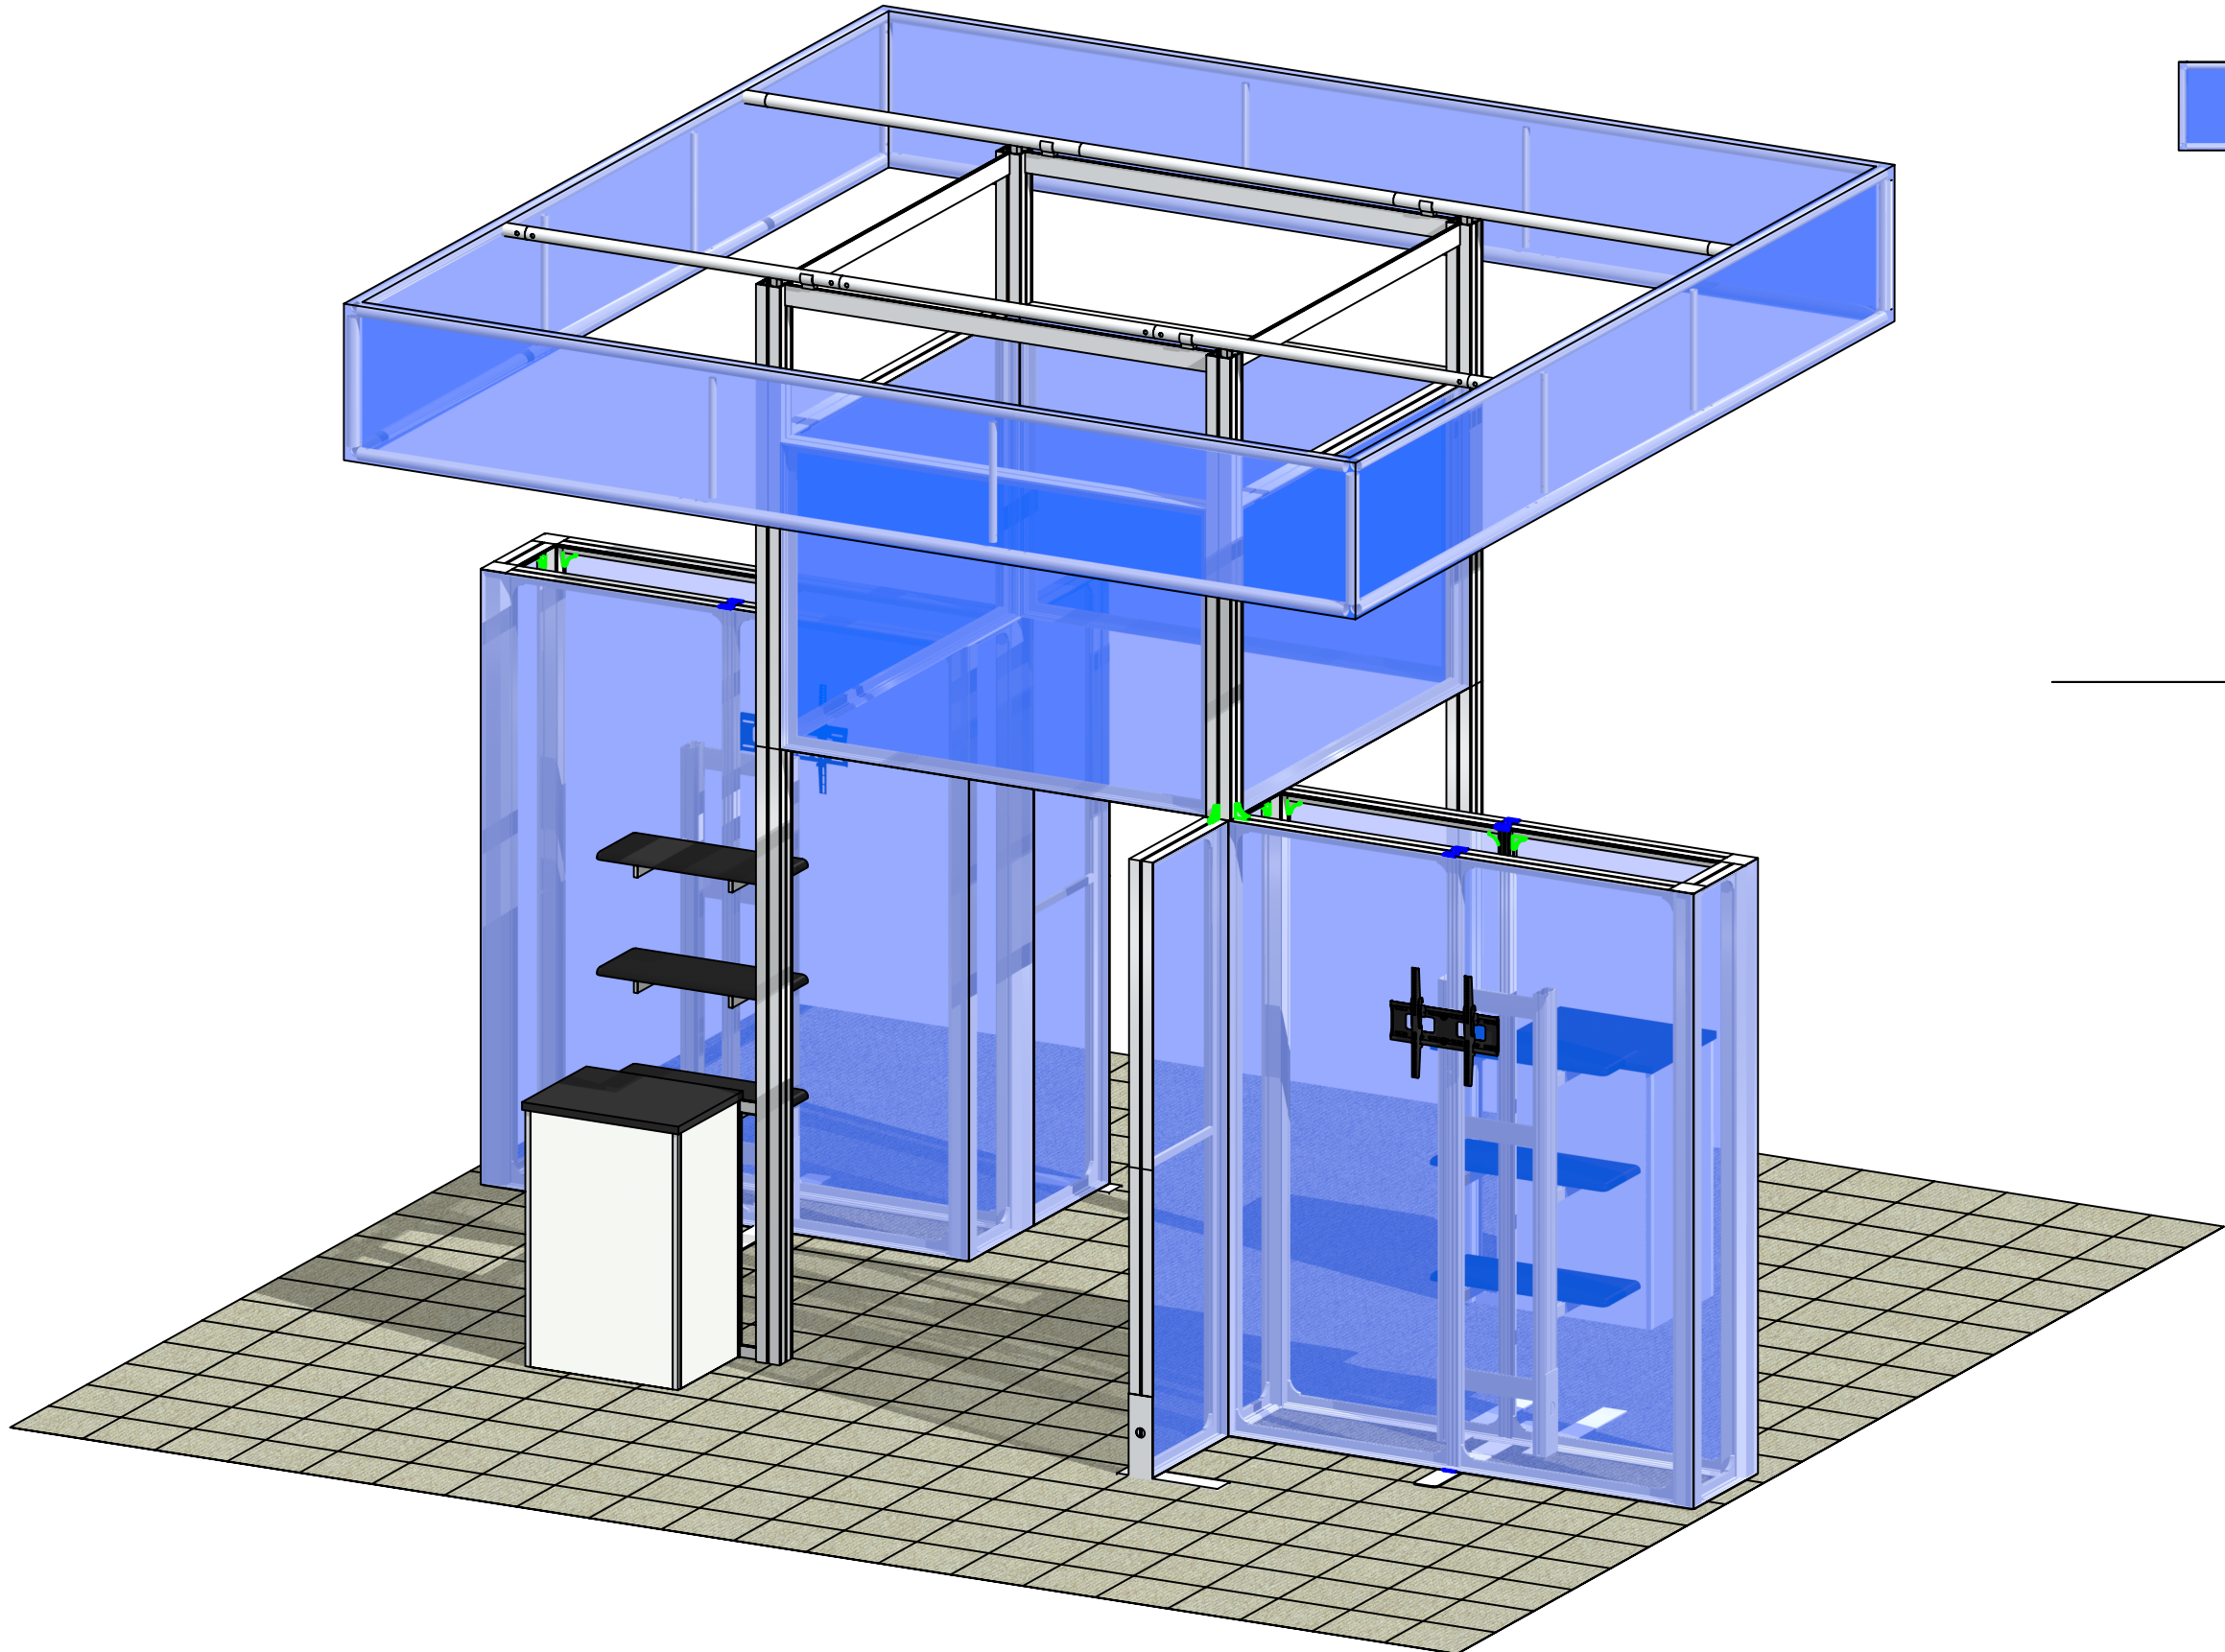

# BOM

## R-HP-K-23

PART	Code-LABEL	#	Description
	CBE-50	59	CORNER PRESSURE FIT CONNECTOR
PHFC4-1800-MCB9-MCB9	R136	8	1800MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS
	CB9	24	90 DEGREE JOINER
PHFC4-1200-MCB9-MCB9-SIDE	R135	8	1200MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS - SIDE CAM LOCKS
PM4S2-1800-A315-A315	R139	4	1800MM PM4S2 EXTRUSION WITH STOPS AT 315MM
PM4S2-2400-A315-A315	R140	2	2400MM PM4S2 EXTRUSION WITH STOPS AT 315MM BOTH ENDS
PM4DSC-600	R13	12	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
PH2-1800-L-L	R134	4	1800MM PH2 EXTRUSION WITH LOCKS BOTH ENDS
LP-450-1000-L0S	R141	4	450MM X 1000MM LOCK PANEL
	PT-1000	2	1000MM LENGTH OF PT EXTRUSION
	P90S-1000	6	1000MM P90S EXTRUSION
LP-600-1000	R132	2	600MM X 1000MM LOCK PANEL
	HPC-15-TOP-B	2	Hybrid 15 BLACK Counter Top Only, 660mm x 510mm
PH-90-L-L	R143	4	90MM PH EXTRUSION WITH LOCKS BOTH ENDS
	LN605-EN	12	MOLDED END CAP FOR PH EXTRUSION
	PM4S3-MK-SHELF	6	750MM X 300MM X 30MM MONITOR KIT SHELF
PH-400-L-SIDE-MK	R131	12	400MM PH EXTRUSION WITH LOCK ONE END AND SIDE CAM LOCK
	PM4S3-MM-FOOT-L	2	PM4S3 MONITOR MOUNT FOOT, LEFT
	PM4S3-MM-FOOT-R	2	PM4S3 MONITOR MOUNT FOOT, RIGHT
PM4S3-1200-A165-A165	R127	4	1200MM PM4S3 EXTRUSION WITH STOPS AT 165MM
PH2-300-TG	R129	4	300MM PH2-TG EXTRUSION
PM4S3-600-A165-A165	R128	4	600MM PM4S3 EXTRUSION WITH STOPS AT 165MM
PH2-350-L-L	R130	6	350MM PH2 EXTRUSION WITH LOCKS BOTH ENDS
PHFC4-600-MCB9-MCB9	R138	4	600MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS
PHFC4-1200-L1-MCB9	R10	8	1200MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 ONE END AND IB2 LOCK HOLE OTHER END
	SW-FOOT-650-LN	2	SMART WALL FOOT , CUT DOWN TO 425MM
	IB2	4	JOINER BAR
	BP-LN114-S3-450	4	FOOT PLATE, 650MM LENGTH
	FC-50-SPCR	16	FC-50-SPCR - FRAME CHANNEL SPACER IN ABS
PM2S2-1200-A165-N	R122	8	1200MM PM2S2 EXTRUSION WITH STOPS AT 165MM ONE END AND NUT INSERT OTHER END
PHFC4-900-L-L	R121	16	900MM PHFC4 EXTRUSION WITH LOCKS BOTH ENDS
PH4-300-TG	R124	4	300MM PH4 EXTRUSION WITH TENSION GLIDES
	PMFC4-90-CAP	14	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90
PMFC4-90-1193-A315	R120	16	1193MM PMFC4-90 EXTRUSION WITH STOPS AT 315MM
PHFC4-300-L-L	R137	8	300MM PHFC4 EXTRUSION WITH LOCKS BOTH ENDS
PH1-510-L-L	R142	2	510MM PH1 EXTRUSION WITH LOCKS BOTH ENDS
	HP-FS-SQU-1	1	14"W X 2"H HANGING SQUARE STRUCTURE HARDWARE
	TC-50MM	4	SILVER ANODIZED FINISH 50MM TUBE CLAMP
	MM-M-T	2	EXTRUSION MOUNTED MEDIUM MONITOR BRACKET AND MOUNTING HARDWARE
	50MM TUBE-30-ASY	4	50MM TUBE-30-ASY
LP-CD-600-1000	R133	2	600MM(W) X 1000MM(V) LOCK CABINET DOOR PANEL
	SP PMFC4-90-CAP	2	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90 WITH CUTOUT

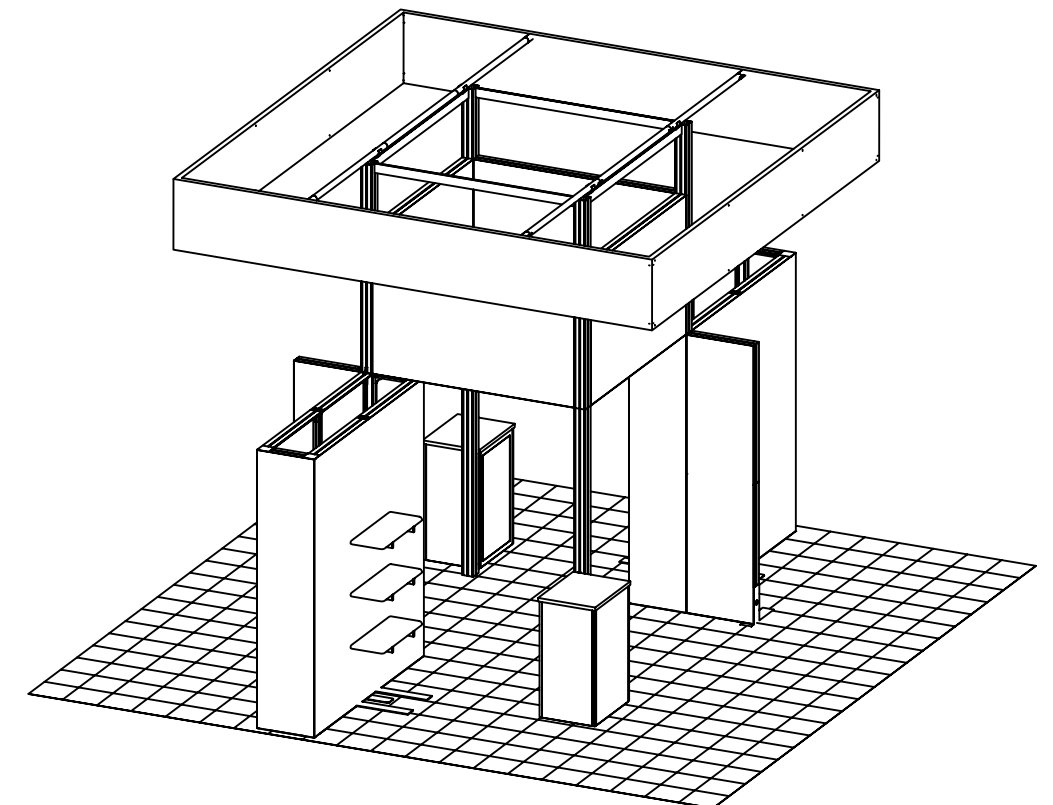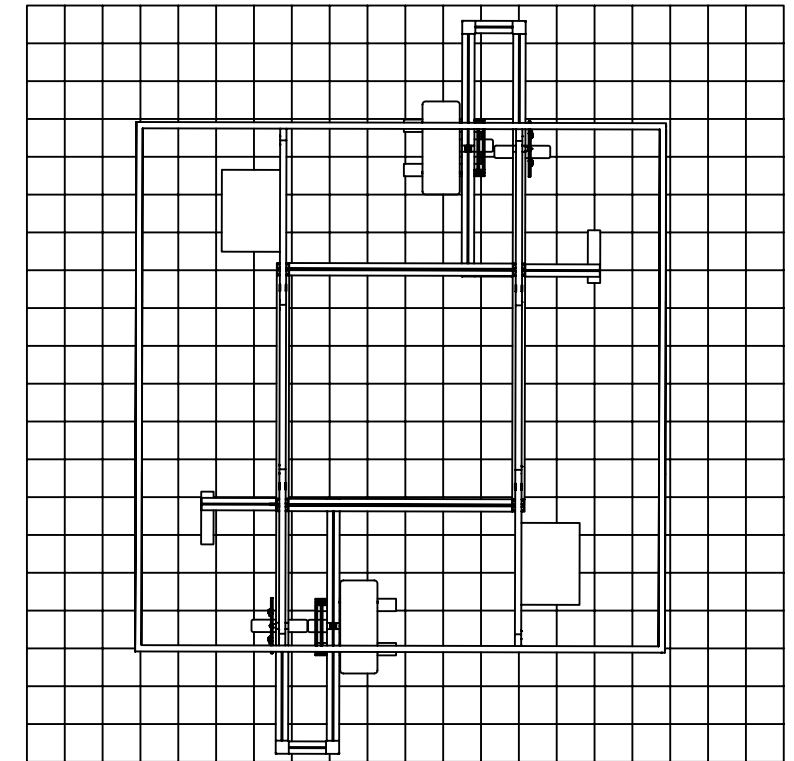


GRAPHICS	#	Description
GRAPHIC D4	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C3	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D1	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C1	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D2	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C2	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D3	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C4	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B2	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B3	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B4	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B5	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B6	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B1	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A2	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A3	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A4	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A5	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A6	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A1	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES

## SET-UP NOTES

1. Redesign of this exhibit without approval by Manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

### NOTE: PARTS MAY COME LOCKED TOGETHER FOR PACKING PURPOSES.

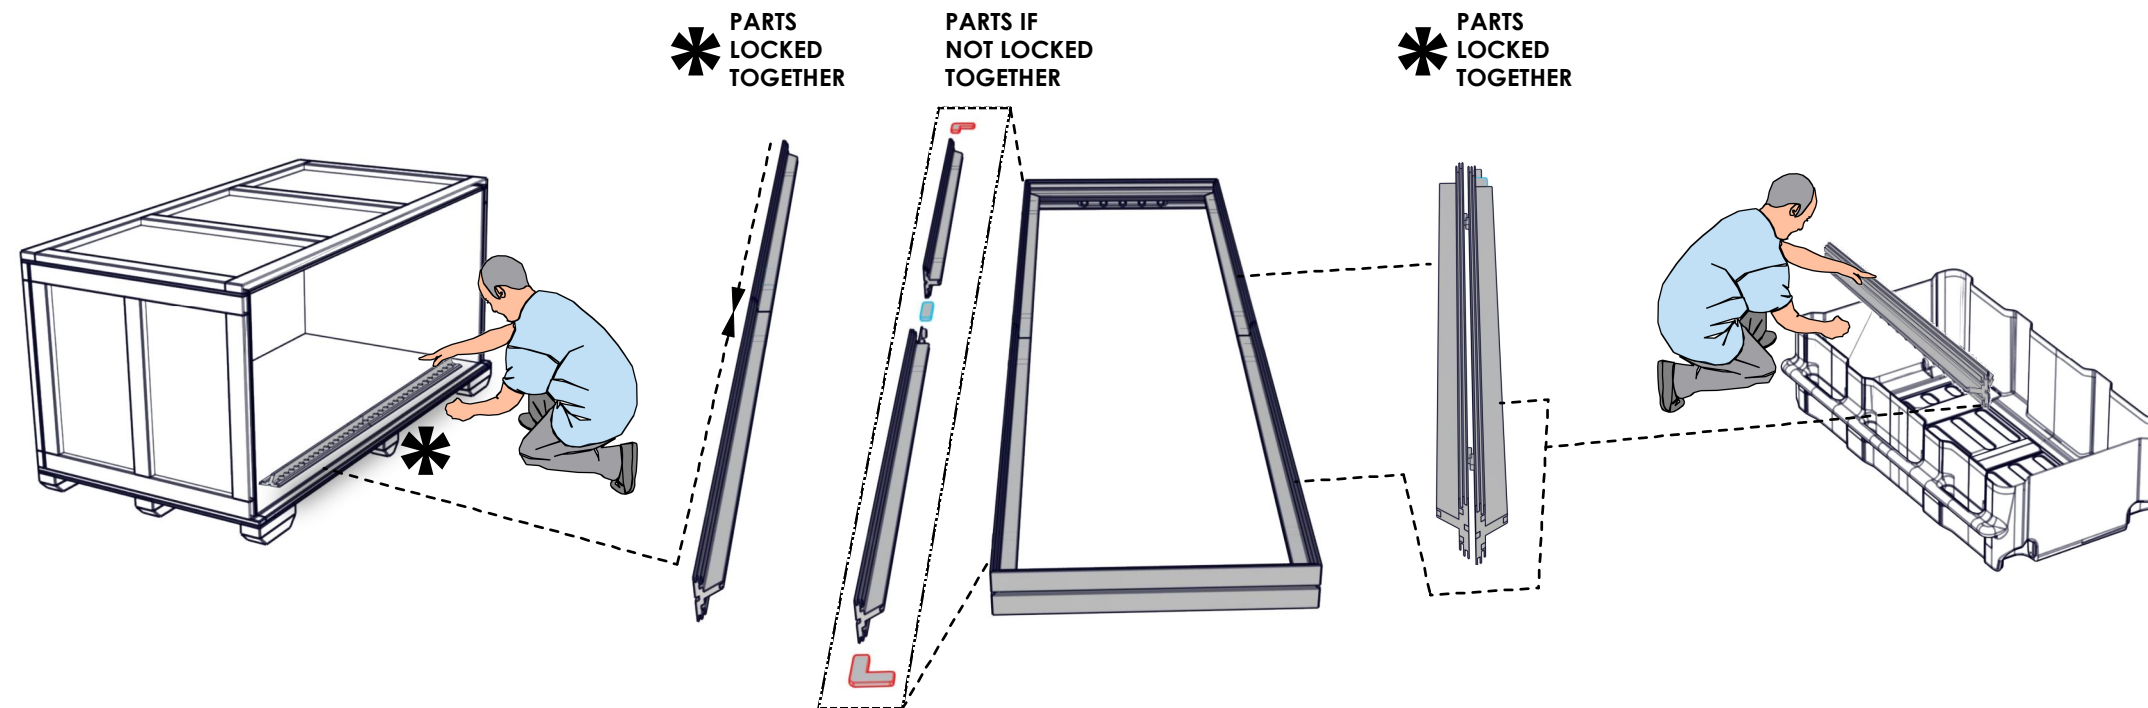

#### IMPERIAL TO METRIC SIZES

8' Nominal = 94 1/2" or 2400mm Actual  
4' Nominal = 47 1/4" or 1200mm Actual  
3' Nominal = 35 7/16" or 900mm Actual  
2' Nominal = 23 5/8" or 600mm Actual  
1' Nominal = 11 13/16" or 300mm Actual

# FABRIC, VINYL & UV GRAPHIC CARE GUIDELINES

## GENERAL HANDLING FABRIC GRAPHICS

- Your fabric graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure fabric is clean and dry before packing.
- Machine washing and/or drying is not recommended for all fabrics. Refer to chart below for which fabrics are washable.

## EMERGENCY STAIN TREATMENT (FABRIC)

- For dry stains, like loose dirt or pencil marks, try initially using masking tape or Magic Eraser (dry-not moistened).
  - Masking tape or MagicEraser (dry) can be quite effective at lifting dry, surface dirt. Try 'pulling' as much of stain away as you can. Avoid rubbing stain into fabric.
- Introduce water or liquid cleaner for stains not responsive to masking tape or dry Magic Eraser.
  - When using liquids to treat stains, if at all possible, treat the stain with fabric off of the frame.
  - Place a clean dry cloth behind stain (to absorb stain while being treated). Moisten another cloth initially with just water (distilled water is optimal, if available).
  - Gently blot stain with moistened cloth (or small area of moistened Magic Eraser), while trying to push stain through to the back, using the dry cloth to absorb.
  - Repeat using care to keep the wet area as small as possible.
- Grandma's Secret Spot Remover can be an effective stain remover. Mix several drops in a small cup with clean water. Repeat above technique, taking care to keep wet area as small as possible and using dry cloth on back of stain to absorb.

## MACHINE WASHING FABRIC GRAPHICS

- Cold water/delicate cycle/tumble dry low or air dry. For stretch fabrics do not use dryer, let hang dry.
- Use caution on dryer time with graphics containing liners. Its best to put tension fabric on frame when fabric is still damp and let it air dry. Always be sure that the aluminum frame is clean when mounting the damp graphic.
- Fabric stretch graphics that are washed and machine dried may shrink up to 3/4" per every 50" of fabric in the direction of the stretch and shrink up to 1/4" in the non stretch direction.

## STORING & PACKING BACKLIT GRAPHICS

- To avoid cracks in the ink or having to steam graphics, Backlit fabrics should be loosely folded with bubble wrap or stored around a tube.
- Avoid folding the graphic tightly to store in a small bag or box.

## GENERAL HANDLING VINYL & UV GRAPHICS


- Vinyl banners and rigid graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure vinyl/ UV is clean and dry before packing. Always follow material handling and packing instructions included.
- All vinyl materials should be rolled with graphics facing in to protect the graphic printed side. Roll on a tube if available.
- Avoid folding materials to reduce the risk of crease lines and chipped inks. If a graphic must be folded, try to fold loosely and as few times as possible.

## EMERGENCY STAIN TREATMENT (UV)

- For drier stains, like loose dirt, pencil marks or adhesive, try initially using masking tape. Masking tape can be quite effective at lifting dry, surface dirt. Try 'pulling' as much of stain away as you can and avoid rubbing the stain into the material.
- When using Solvent to clean a stain be sure to avoid any image. Solvent is aggressive and will take the image off. Soapy water should be used at a ratio of 1 part Dawn® /10 parts water.
- While using Windex® avoid scrubbing harshly. Too much pressure can fade the graphic print.

## GENERAL HANDLING OF ROLLABLE PVC PANELS


All mural panels, truss panels and detachables should be rolled with graphics facing out to protect the graphic printed side. Mural panels should be stored in the original plastic sleeves that are provided with the panels.

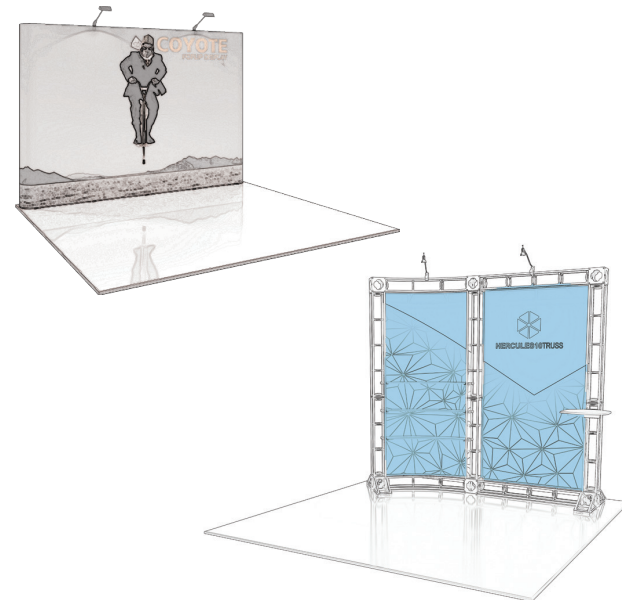

# FABRIC, VINYL & UV GRAPHIC CARE GUIDELINES

## STEAMING FABRIC GRAPHICS

- For optimal results, steam wrinkles when fabric is tensioned and installed securely on the frame.
- Fill steamer with clean drinking water or distilled water. Avoid using water containing hard minerals.
- Hold steamer upright and hold close to fabric. Avoid touching fabric with steamer.
- Do not tip steamer as water drips may cause water marks to form on graphic.

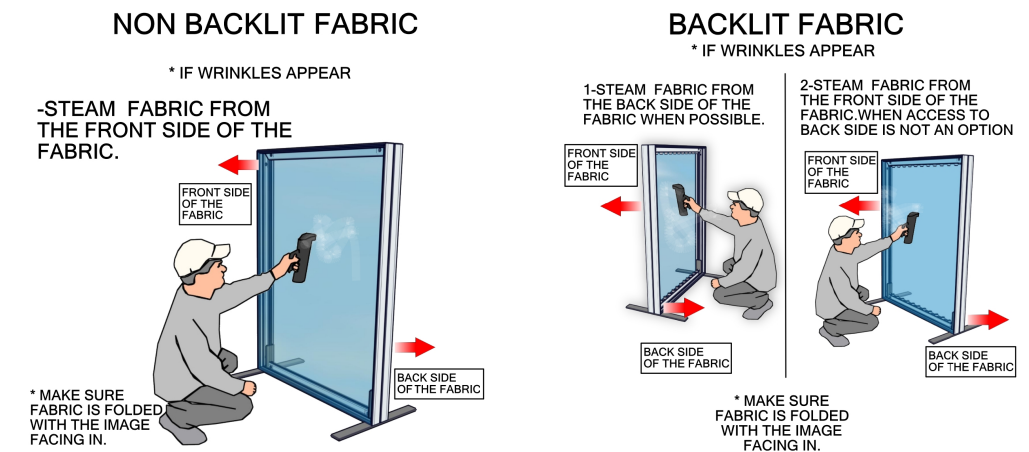


## HANDLING REFERENCE CHART

FABRIC	WASHING MACHINE	DRY CLEAN	SPOT CLEAN	STEAMING/ IRON	MAGIC ERASER
RESILIENCE	NO	NO	NO	NO	YES (ONLY ON WHITE)
OXFORD	YES	YES	YES	YES	YES
POWER STRETCH	YES	YES	YES	YES	YES
DISPLAY POLYESTER	YES	YES	YES	YES	YES
DISPLAY POLY CONVERTIBLES TABLE THROWS	YES (MUST VELCRO THE TABS)	YES (MUST VELCRO THE TABS)	YES	YES	YES
OUTDOOR FLAG	YES	N/A	YES	YES	YES
CANVAS OUTDOOR	NO	NO	YES	STEAM ONLY	YES
CANVAS LIGHTBOX	NO	NO	NO	STEAM ONLY	YES
AGILITY	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
SUPER STRETCH	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
TRIPLE WHITE	YES	YES	NO	YES	NO
ECLIPSE	NO	NO	YES	STEAM ONLY	YES
SOFT KNIT	YES	YES	YES	YES	YES
SHEER	YES	YES	YES	YES	YES

## VINYL & ROLLABLE

	SOLVENT	SOAPY WATER (DAWN®)	WINDEX®
FLATMAXX	ONLY ON WHITE	YES	NO
SCRIM 130Z/ 180Z	ONLY ON WHITE	YES	NO
VINYL 200Z	ONLY ON WHITE	YES	NO
MELINEX	NO	YES	NO
MURAL PANELS	NO	YES	YES
UV RIDGED	NO	YES	YES








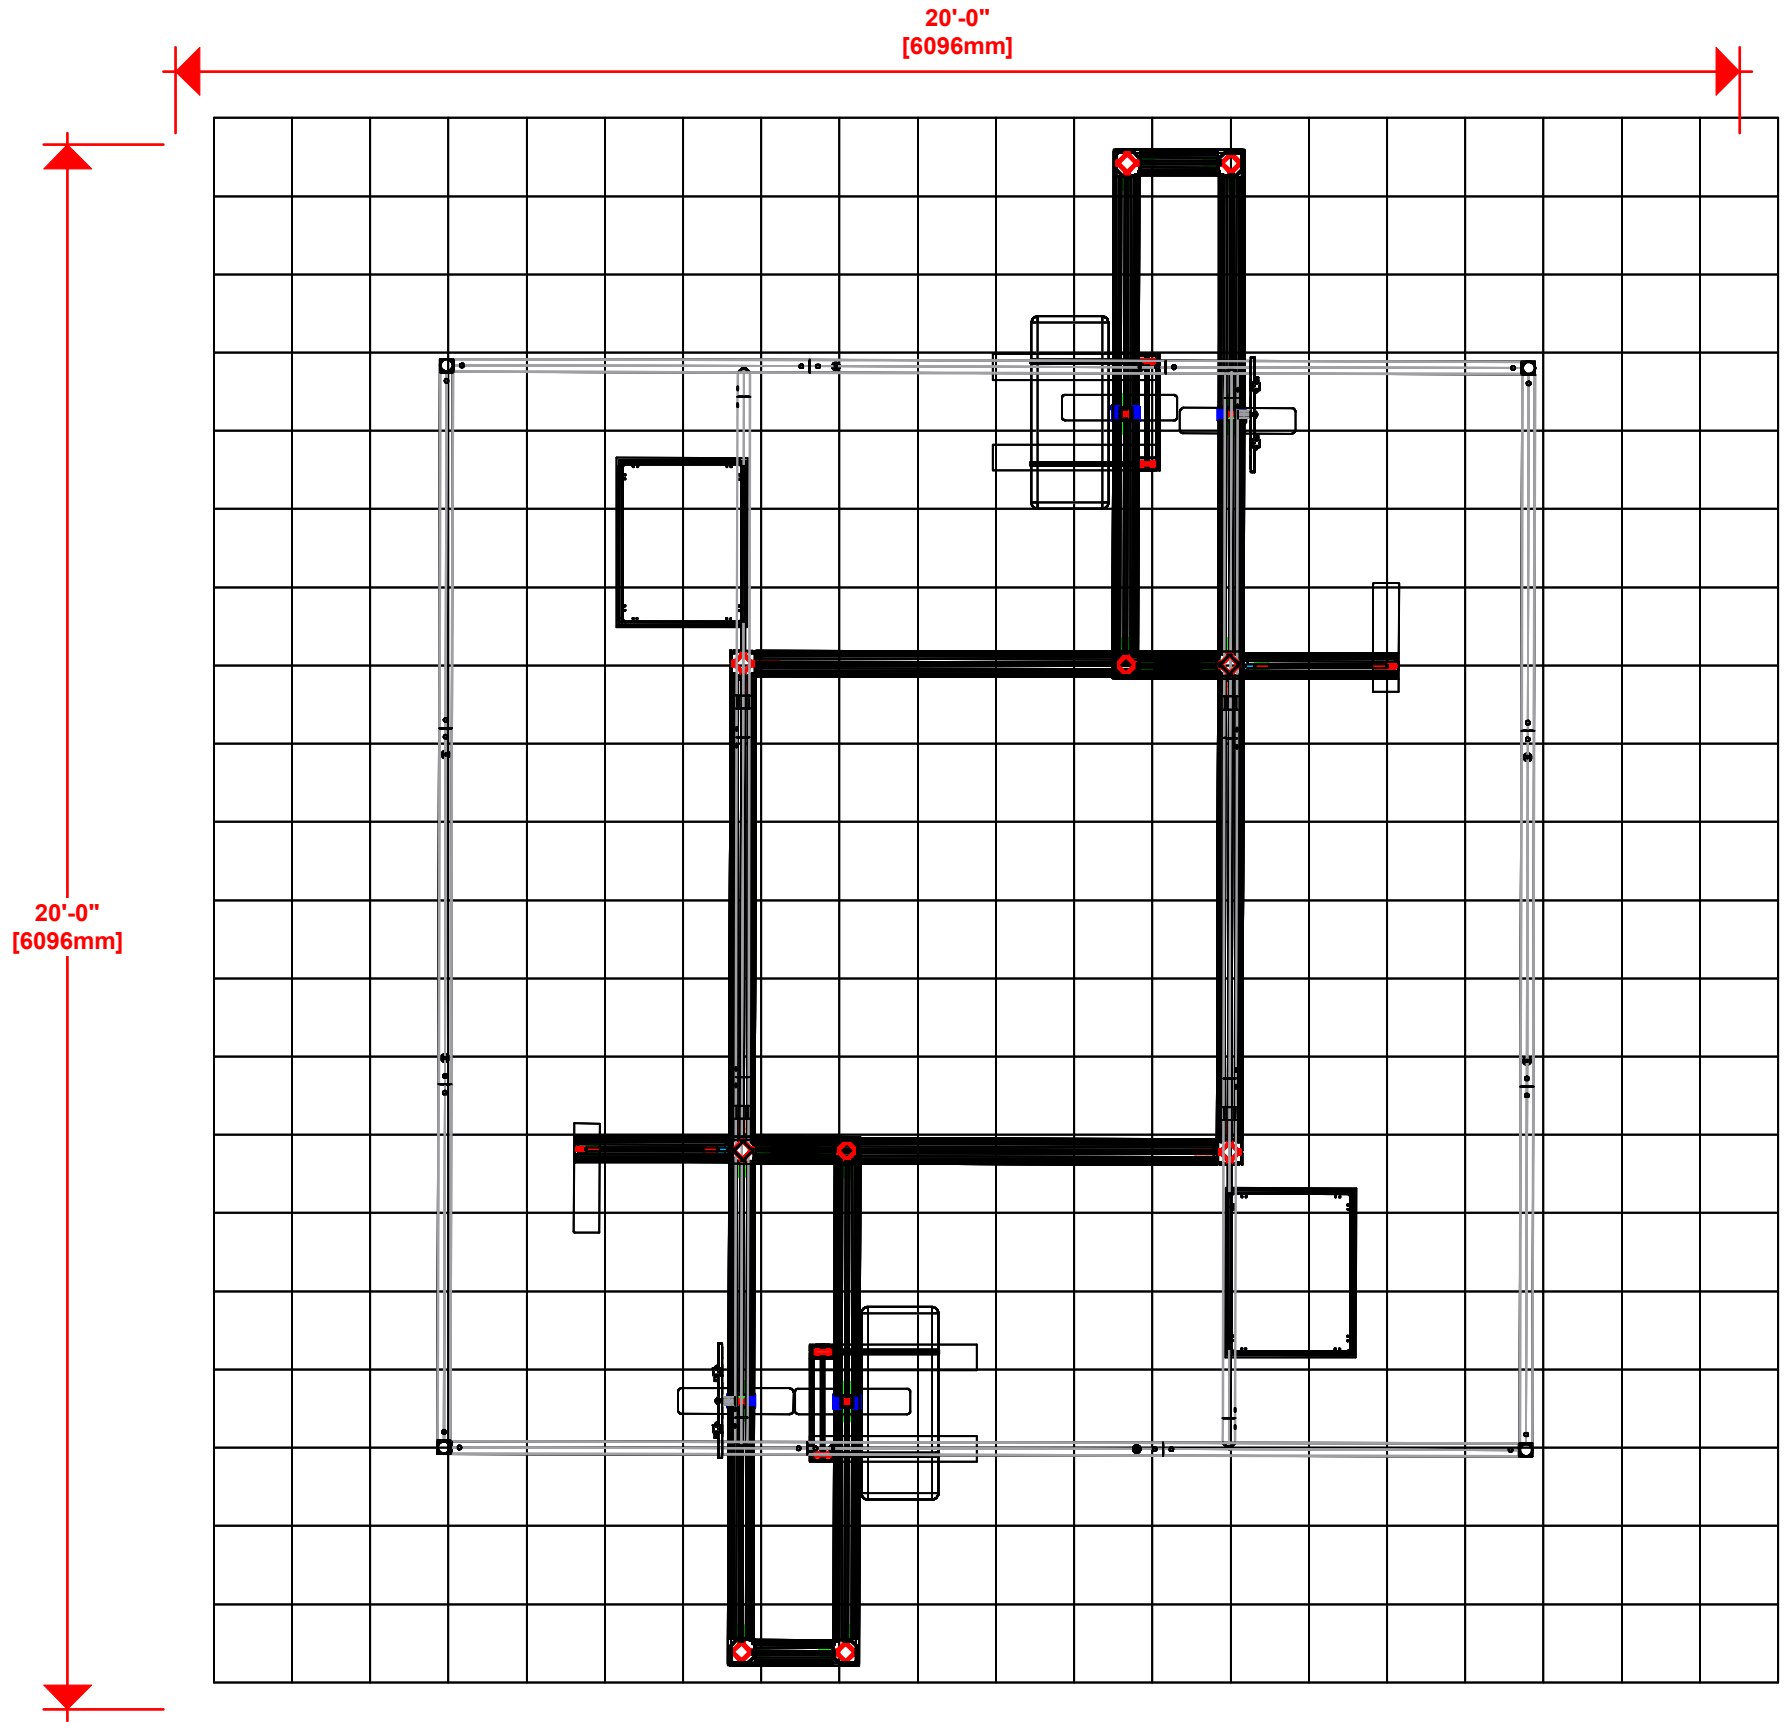






1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

- |                    |                                 |
|--------------------|---------------------------------|
| 2400mm = (94 1/2") | Phone Line / Fax                |
| 2100mm = (82 5/8") | Internet connection             |
| 1800mm = (70 7/8") | Outlet                          |
| 1500mm = (59")     | Main Drop (point of distrution) |
| 1200mm = (47 1/4") |                                 |
| 900mm = (35 1/2")  |                                 |
| 600mm = (23 5/8")  |                                 |
| 300mm = (11 7/8")  |                                 |
- Wire running under carpet

-  PMFC4-90
-  PM4D
-  PM4S3
-  PH2-300-TG
-  PH2
-  PM2S2
-  PHFC4
-  PHFC2
-  PH
-  PH4SC

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS

  
Caution  
sharp edges  
on metal parts

EP


Code	#	Description
R136	8	1800MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS
CB9	16	90 DEGREE JOINER
R135	8	1200MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS - SIDE CAM LOCKS

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.


2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet



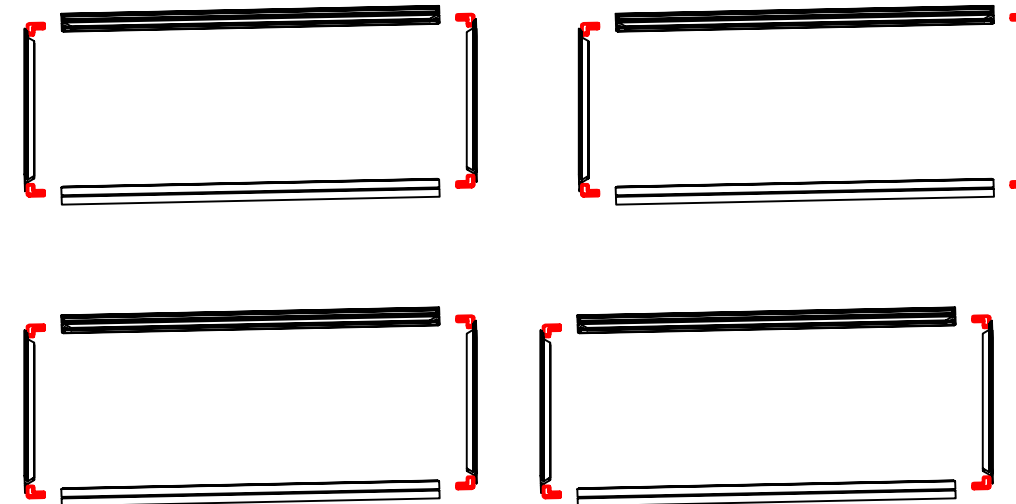


## BUILD X4 UNITS

\* LAYING ON THE FLOOR

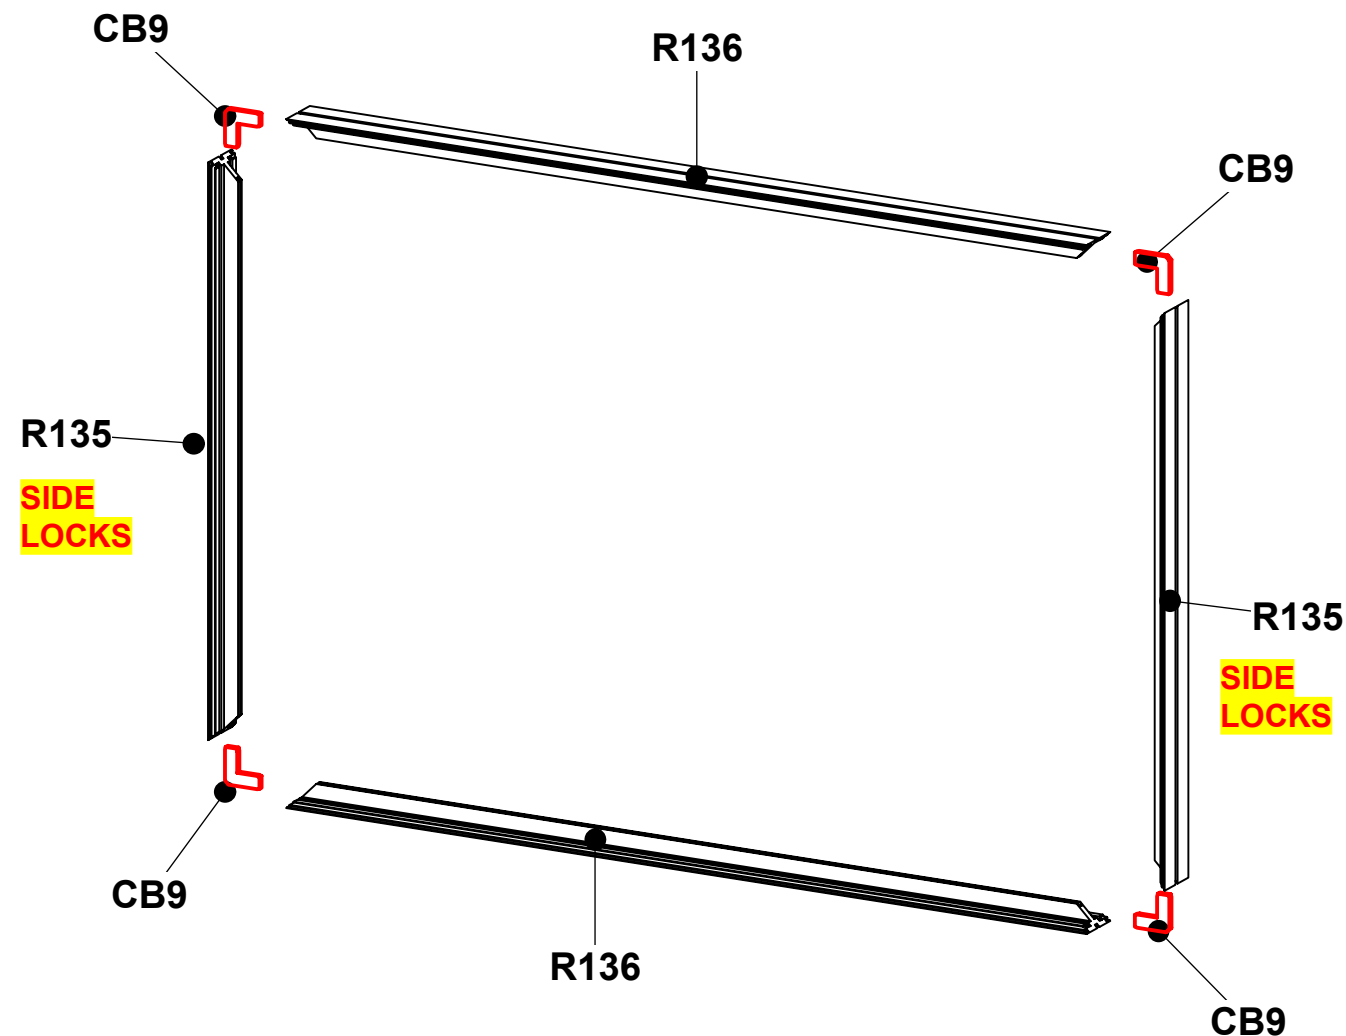

## BUILD X4 UNITS

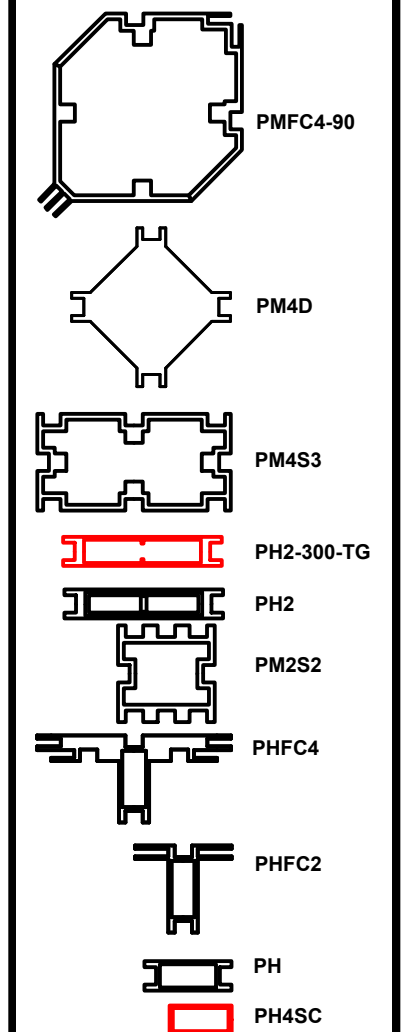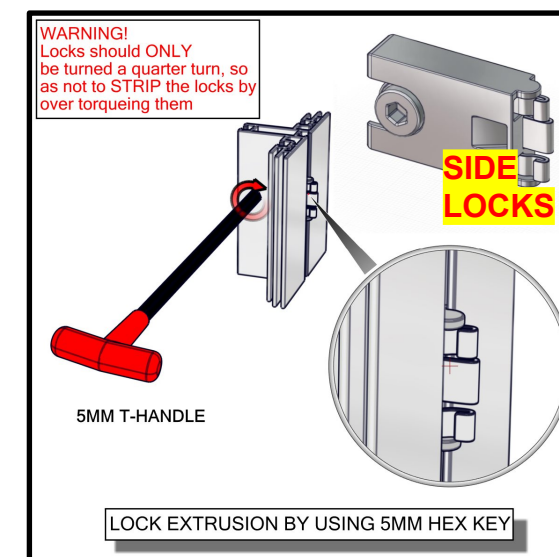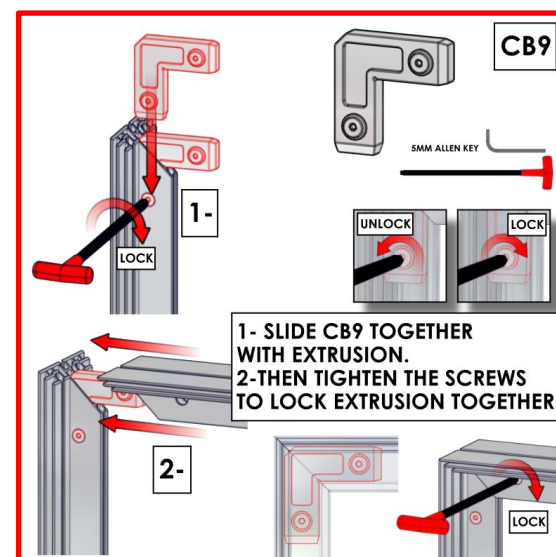





### HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS





Caution  
sharp edges  
on metal parts

Code	#	Description
R139	3	1800MM PM4S2 EXTRUSION WITH STOPS AT 315MM
R140	2	2400MM PM4S2 EXTRUSION WITH STOPS AT 315MM BOTH ENDS
R13	4	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
PMFC4-90-CAP	1	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90
R120	2	1193MM PMFC4-90 EXTRUSION WITH STOPS AT 315MM
SP PMFC4-90-CAP	1	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90 WITH CUTOUT

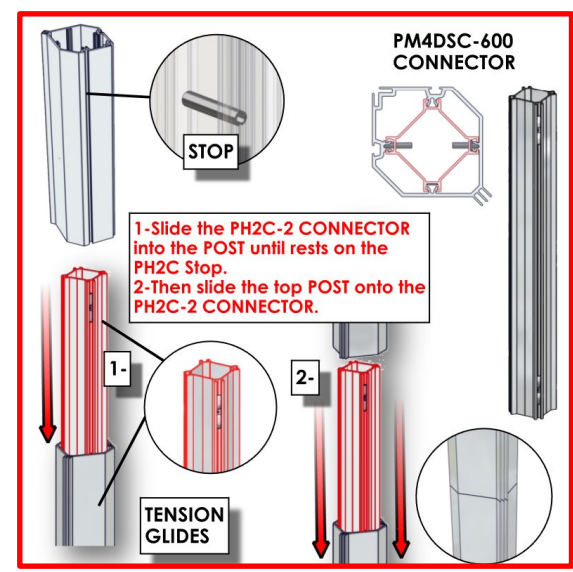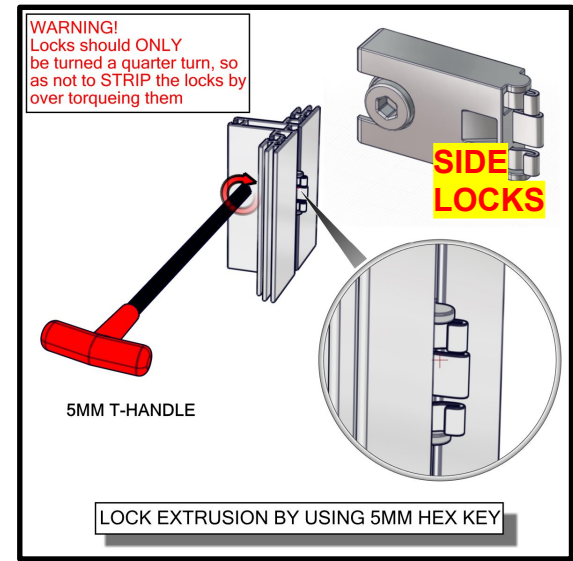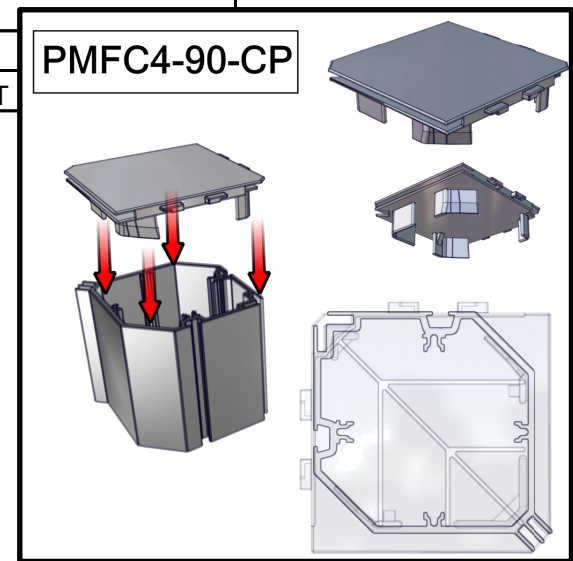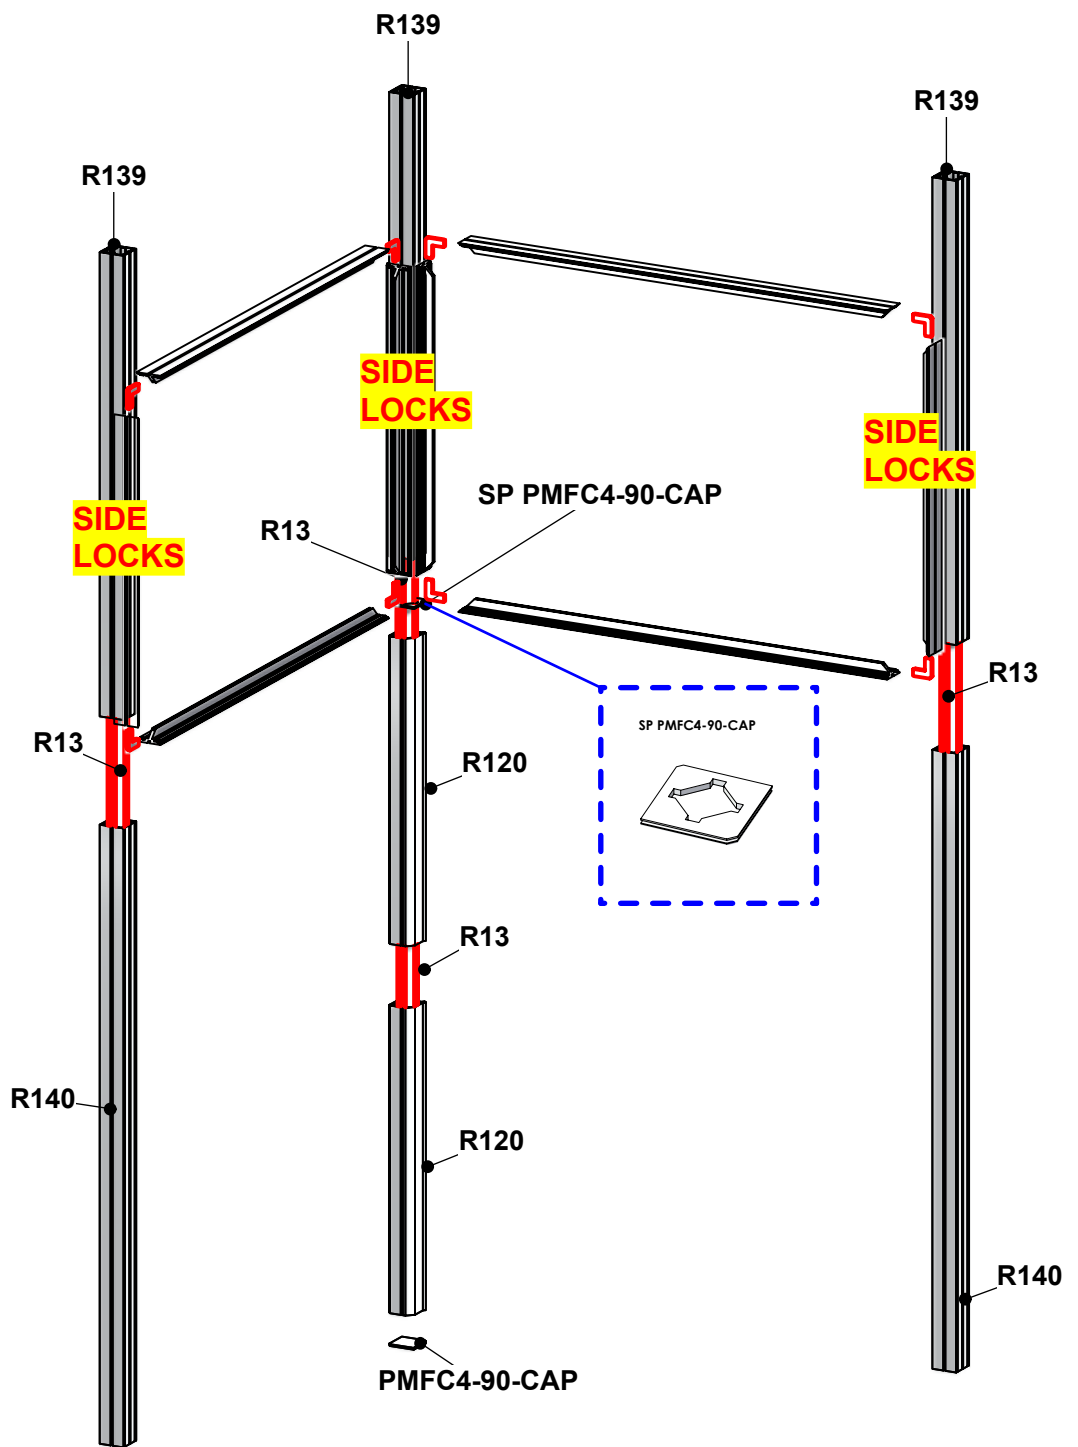

# LOCK X2 FRAMES

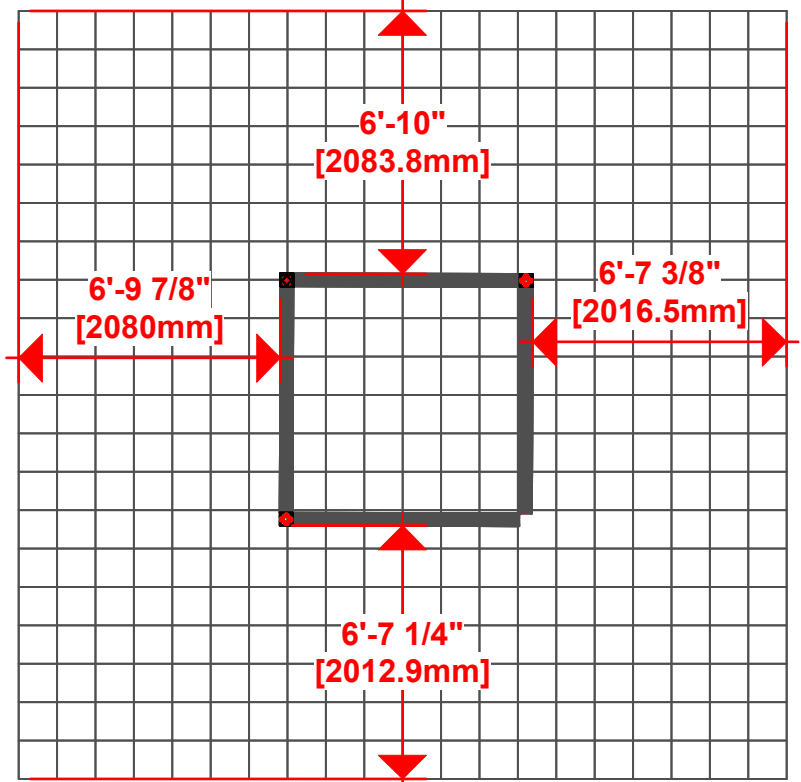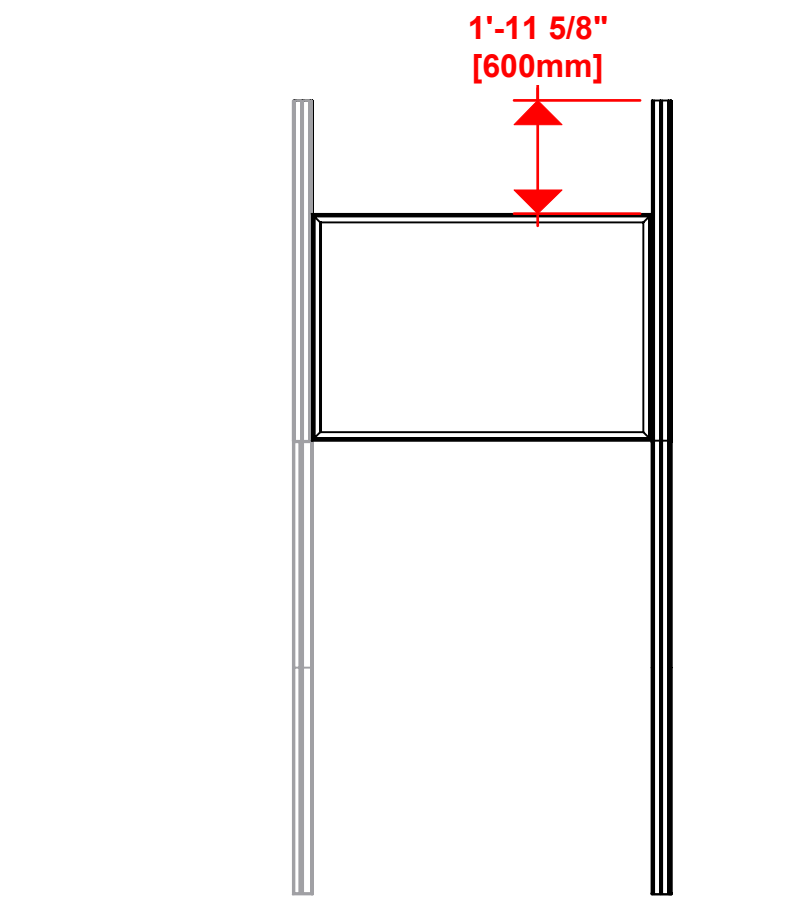


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. \*Nominal\* refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet




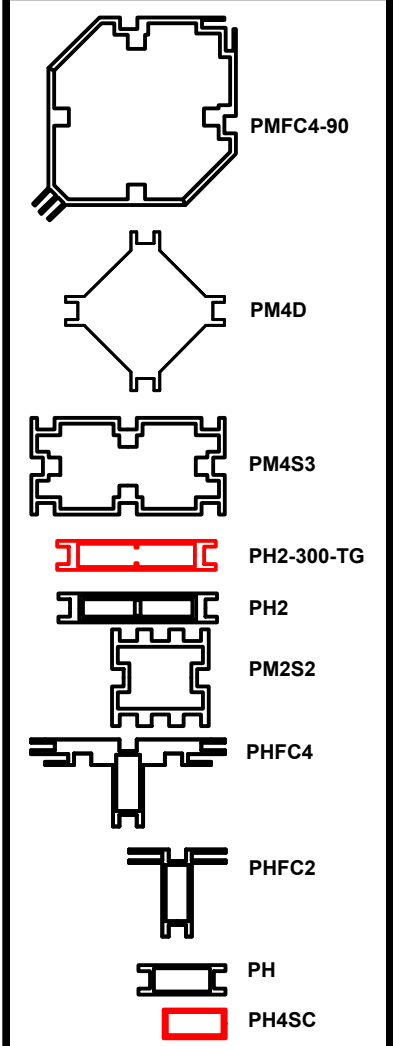


**HYBRID PRO RENTAL KIT**



Title: SET-UP INSTRUCTIONS



Code	#	Description
R139	1	1800MM PM4S2 EXTRUSION WITH STOPS AT 315MM
R13	2	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
PMFC4-90-CAP	1	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90
R120	2	1193MM PMFC4-90 EXTRUSION WITH STOPS AT 315MM
SP PMFC4-90-CAP	1	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90 WITH CUTOUT

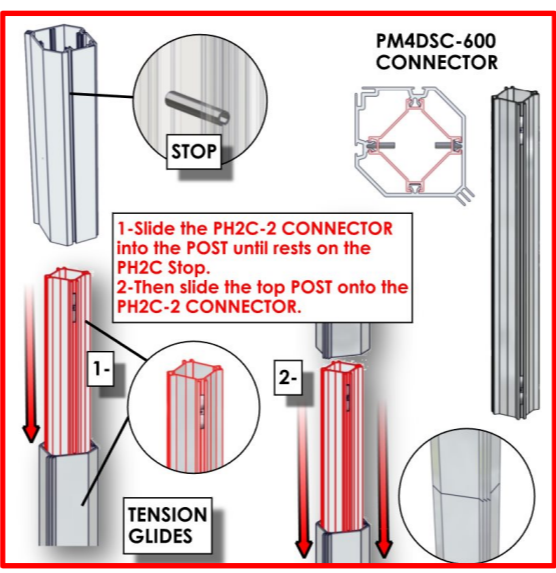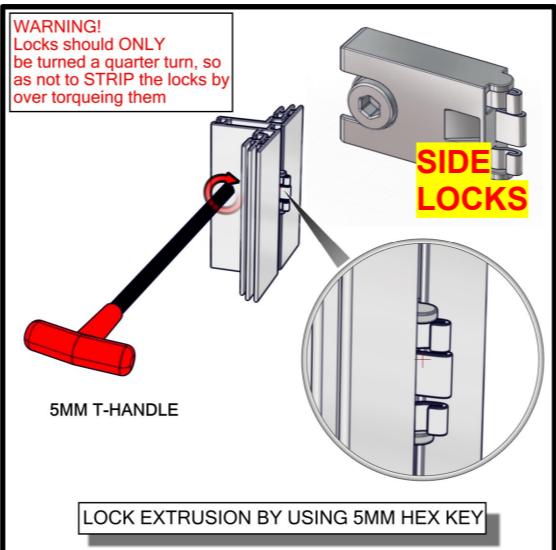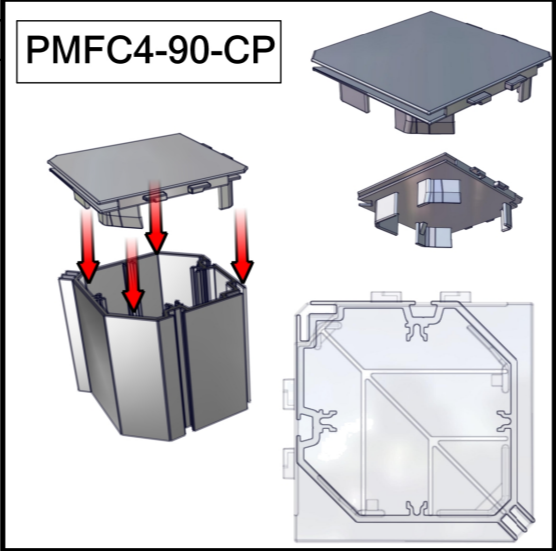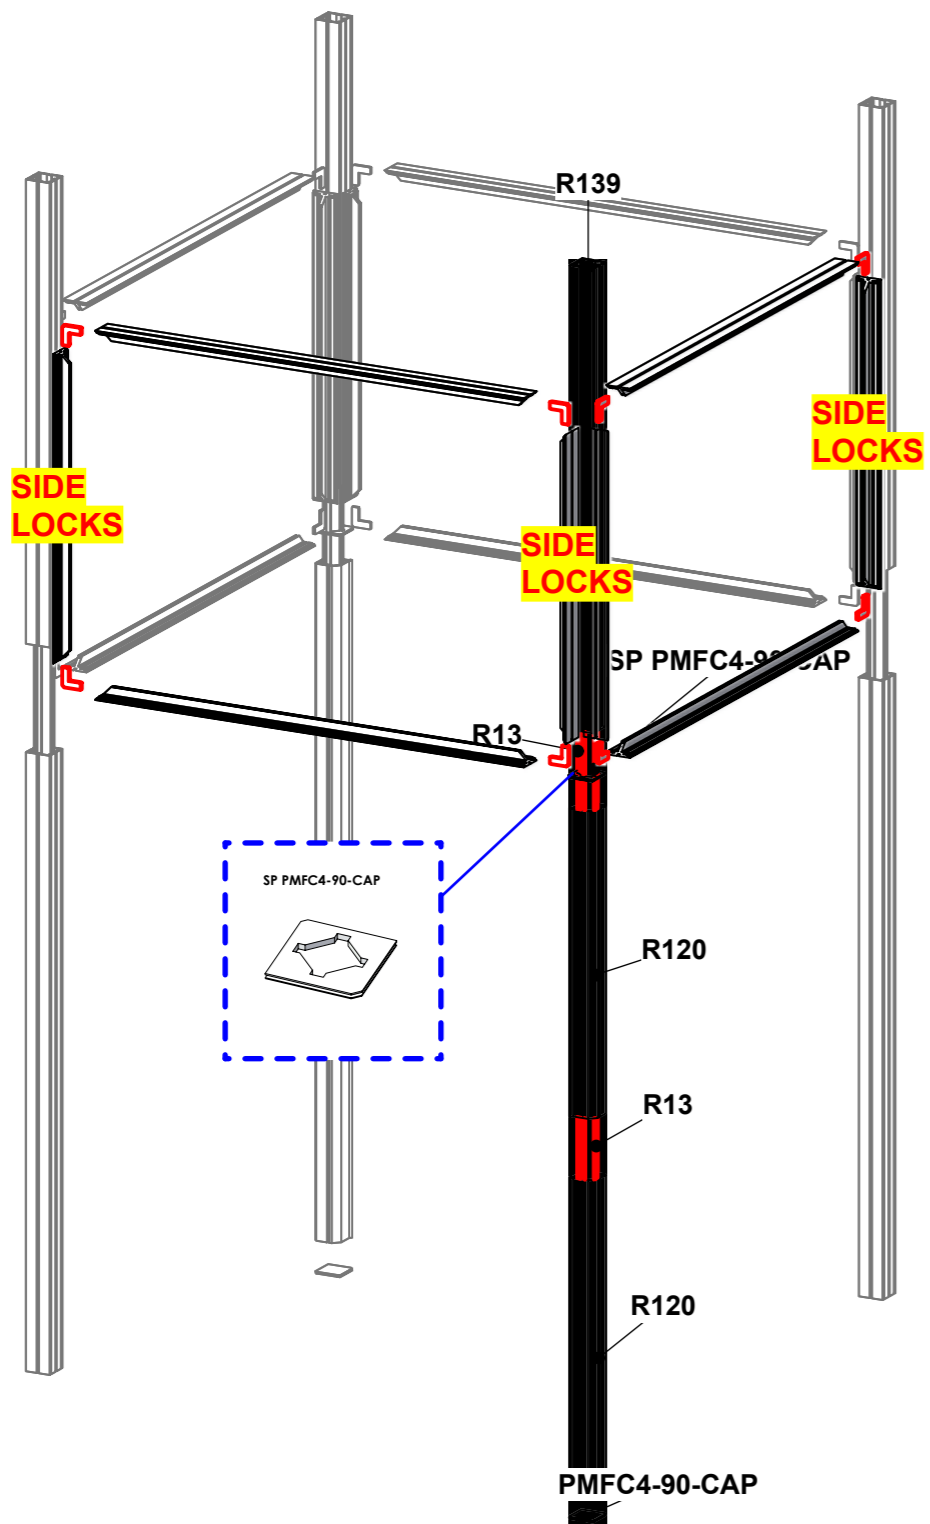


# LOCK X2 FRAMES

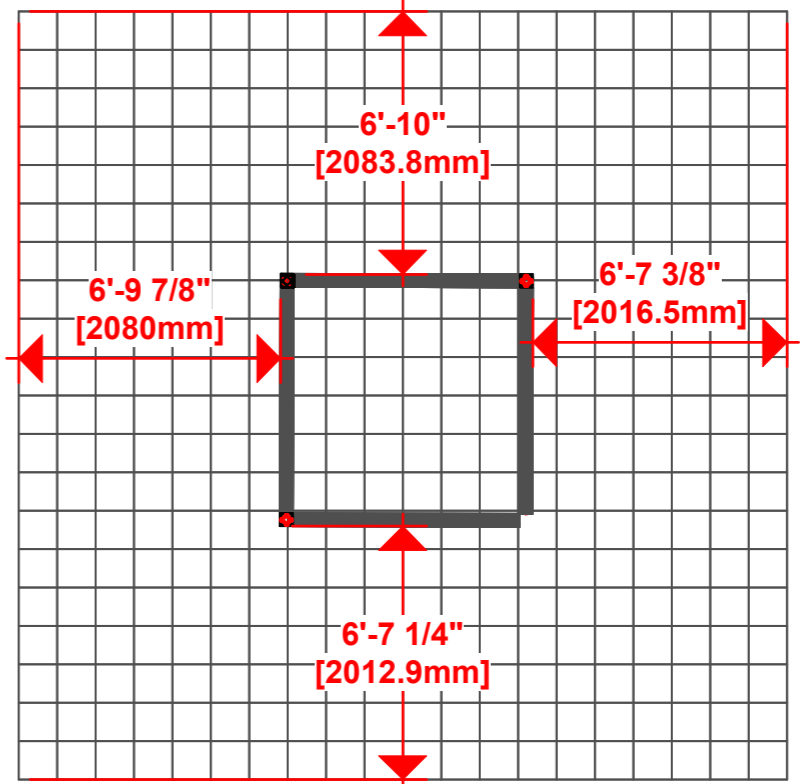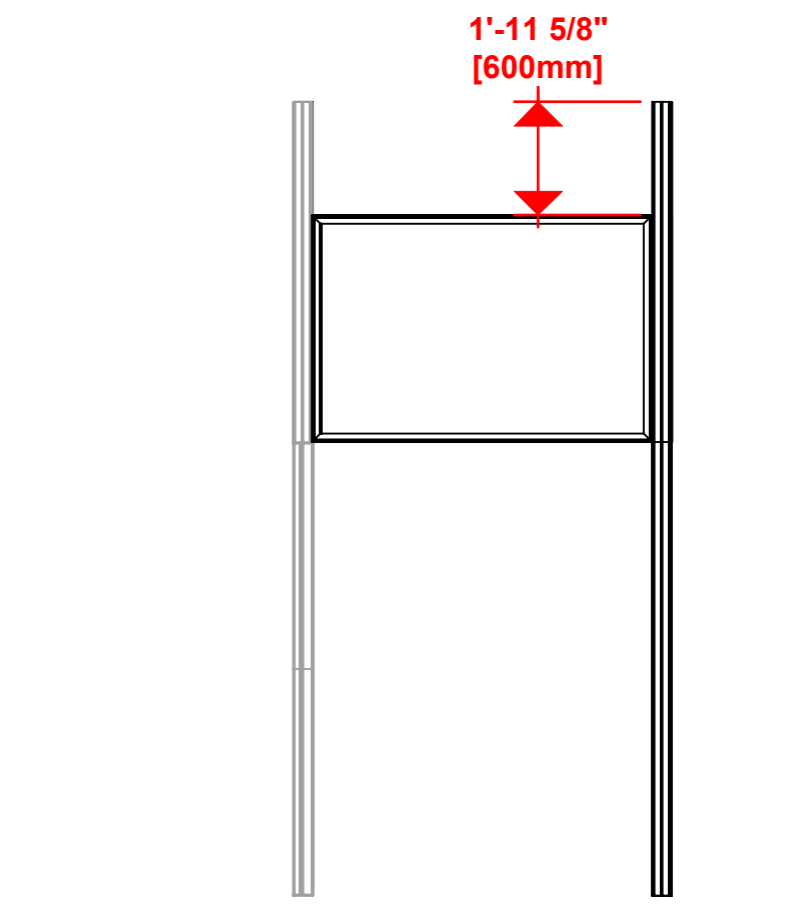

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrition)
1200mm = (47 1/4")	Wire running under carpet
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	


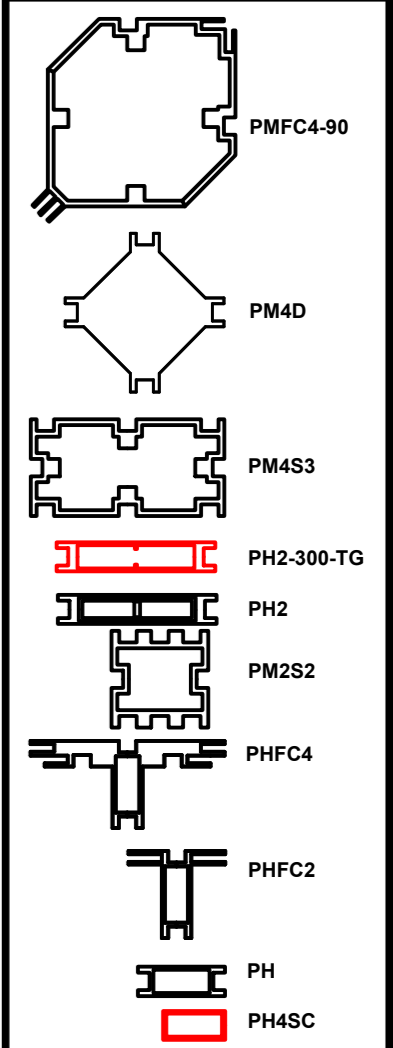


## HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS


Caution sharp edges on metal parts

Code	#	Description
R134	4	1800MM PH2 EXTRUSION WITH LOCKS BOTH ENDS
TC-50MM	4	SILVER ANODIZED FINISH 50MM TUBE CLAMP

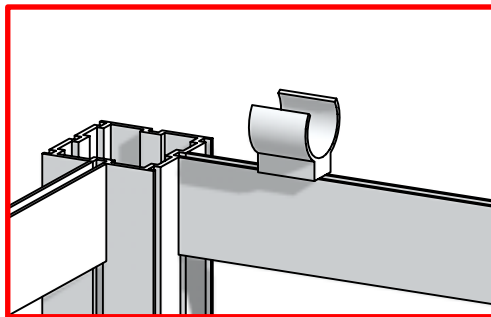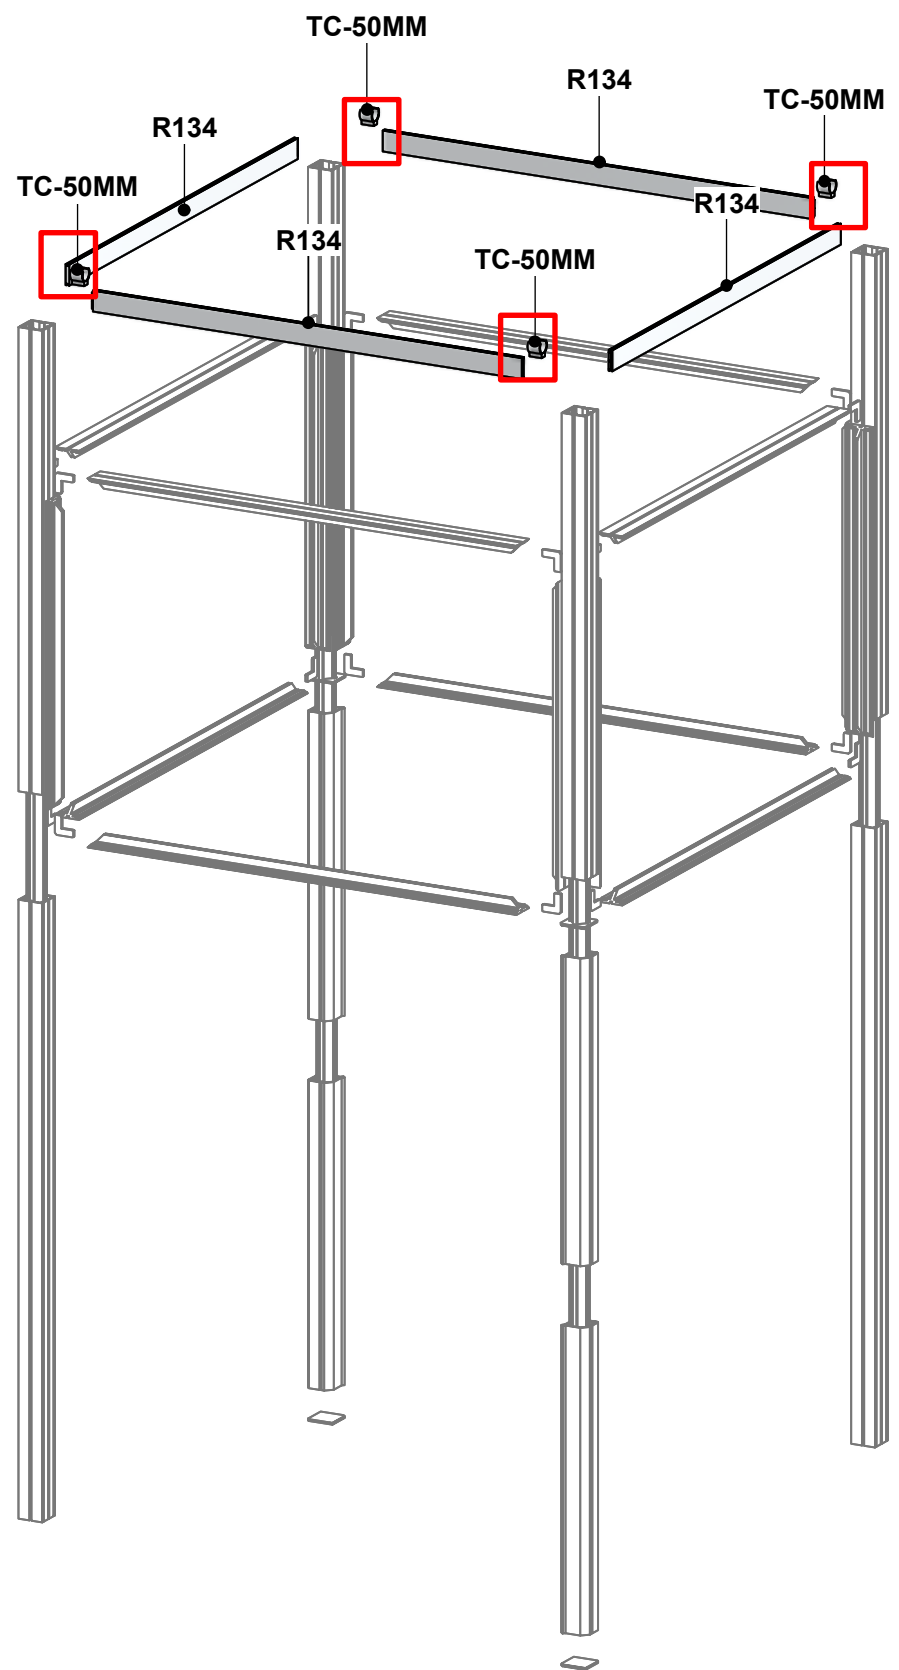


### TC-50

- 1- SLIDE CLAMP INTO PROPER CHANNEL
- 2- SECURE CLAMP WITH 5MM T HANDLE
- 3- PLACE TUBE STRUCTURE AND GENTLY TIGHTEN WITH 5MM T HANDLE

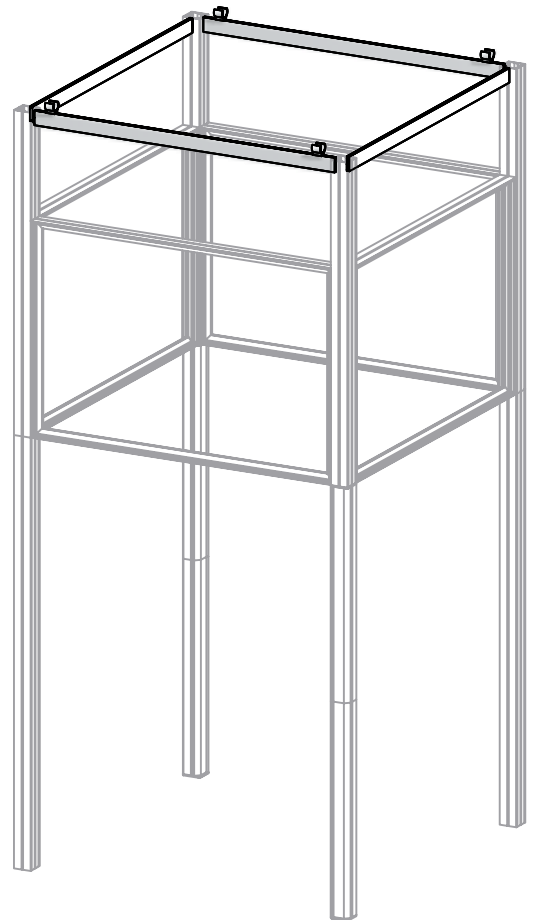

**WARNING!**  
Locks should ONLY be turned a quarter turn, so as not to STRIP the locks by over torquing them

LOCK EXTRUSION BY USING 5MM ALLEN KEY

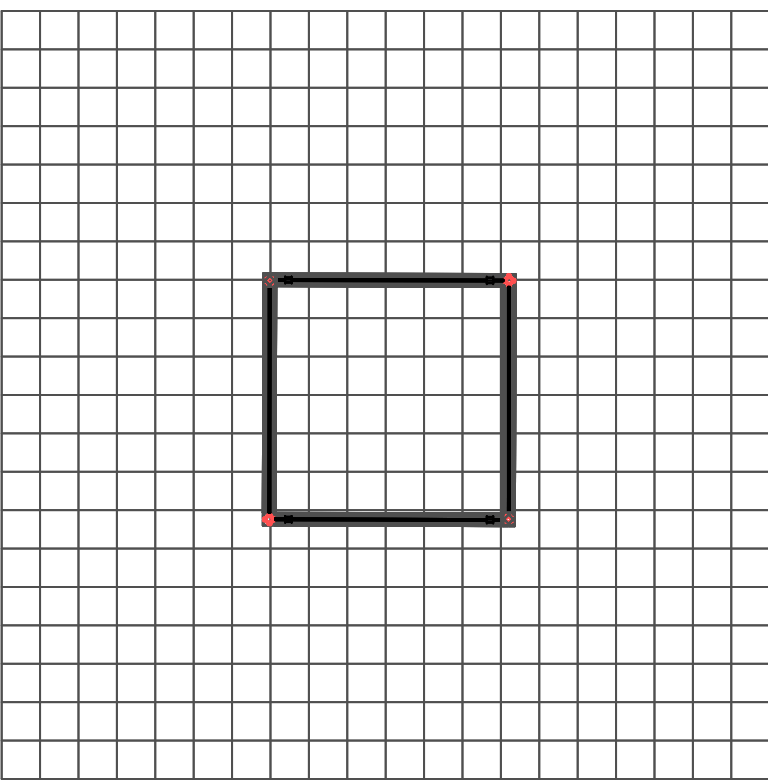

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. \*Nominal refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

- PMFC4-90
- PM4D
- PM4S3
- PH2-300-TG
- PH2
- PM2S2
- PHFC4
- PHFC2
- PH
- PH4SC

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



# HP-K-23-SQU

## SET UP INSTRUCTIONS:


1. CONNECT BOTTOM AND TOP TUBES FOLLOWING THE LABELS
2. CONNECT SIDE TUBES
3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
4. CAREFULLY REMOVE FABRIC COVER FROM BAG
5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
6. PULL COVER CAREFULLY UP TO THE TOP
7. CLOSE ALL ZIPPERS
8. ADJUST FABRIC AROUND THE FRAME
9. CONNECT CABLE HARNESS TO THE EYEBOLTS
10. COMPLETELY TIGHTEN THREADED CONNECTORS

## BREAK DOWN INSTRUCTIONS:










REVERSE SET-UP STEPS TO BREAKDOWN FRAME

## FABRIC CARE INSTRUCTIONS:

1. UNZIP COVER ZIPPERS
2. CAREFULLY REMOVE FABRIC COVER
3. CLOSE ALL ZIPPERS
4. FOLD OR ROLL NEATLY
5. PLACE FABRIC IN COVER BAG

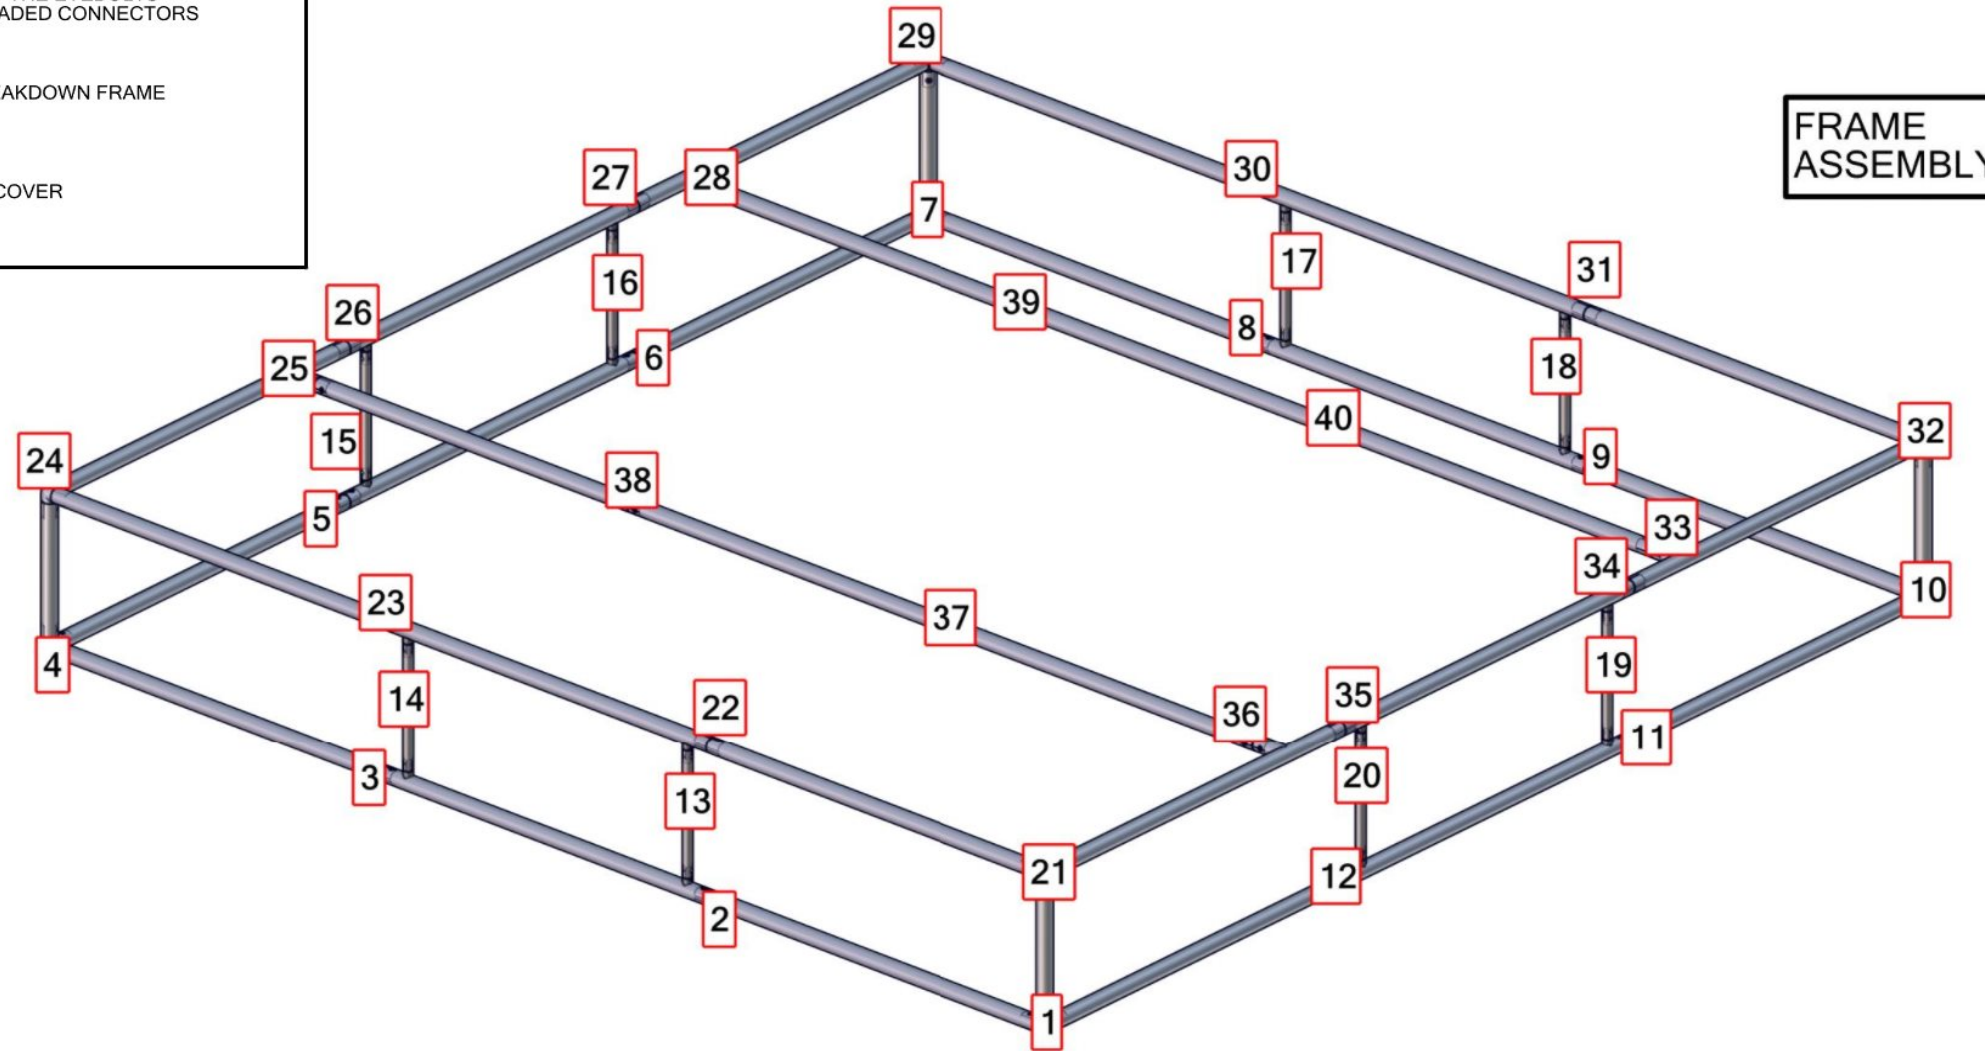

**FRAME ASSEMBLY**

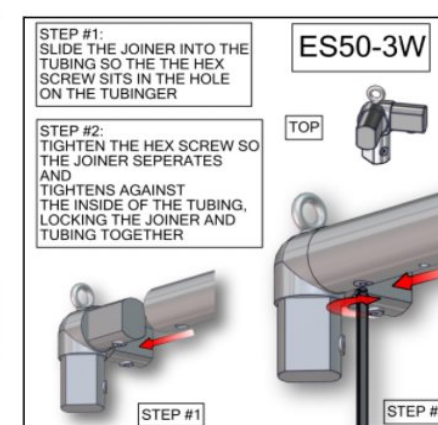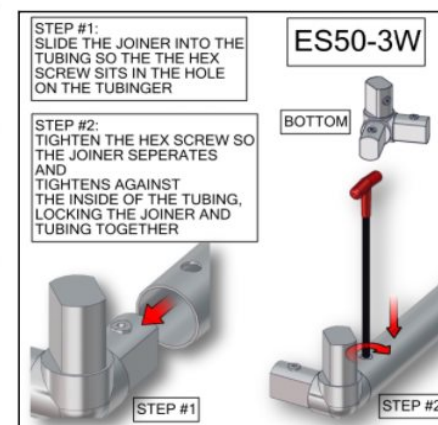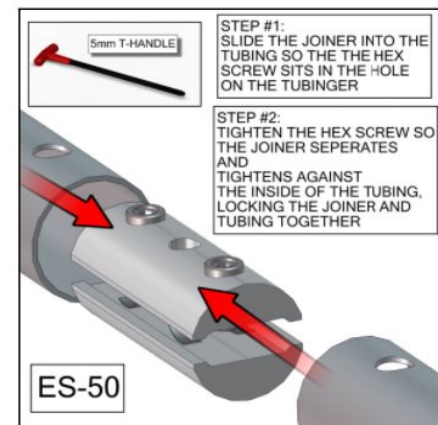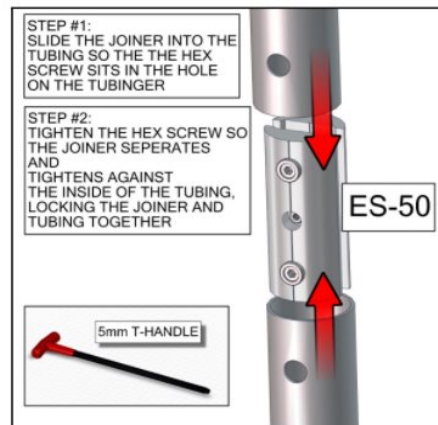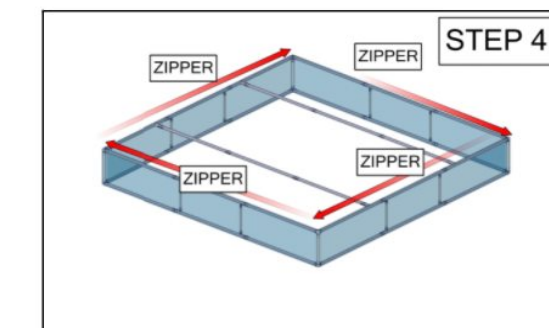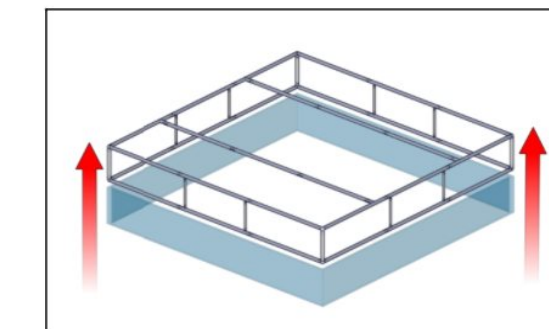
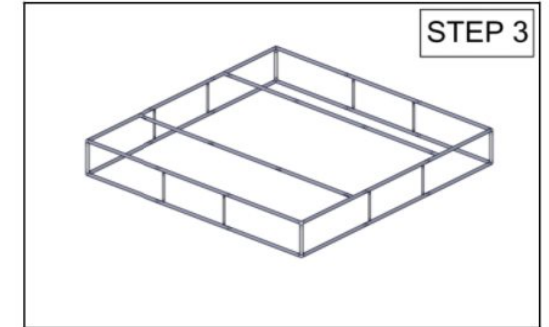
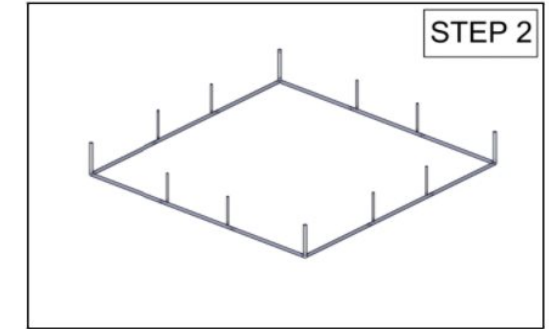
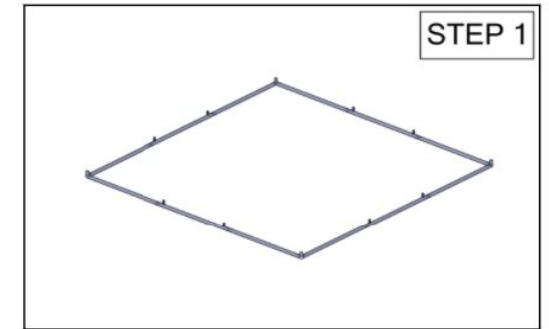


Code	#	Description
HP-FS-SQU-1	1	14'W X 2'H HANGING SQUARE STRUCTURE HARDWARE

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

- |                    |                                   |
|--------------------|-----------------------------------|
| 2400mm = (94 1/2") | ▼ Phone Line / Fax                |
| 2100mm = (82 5/8") | ⚡ Internet connection             |
| 1800mm = (70 7/8") | ⚡ Outlet                          |
| 1500mm = (59")     | ⚡ Main Drop (point of distrution) |
| 1200mm = (47 1/4") |                                   |
| 900mm = (35 1/2")  |                                   |
| 600mm = (23 5/8")  |                                   |
| 300mm = (11 7/8")  |                                   |
- Wire running under carpet

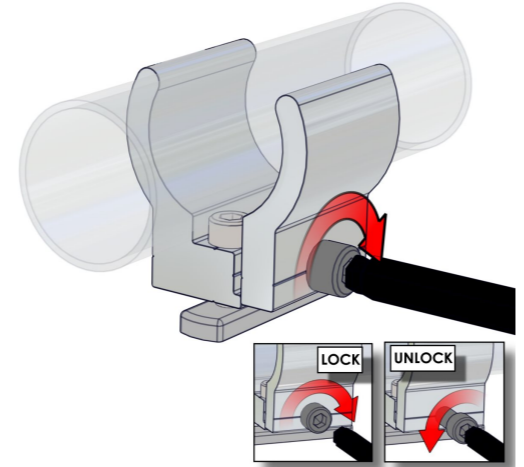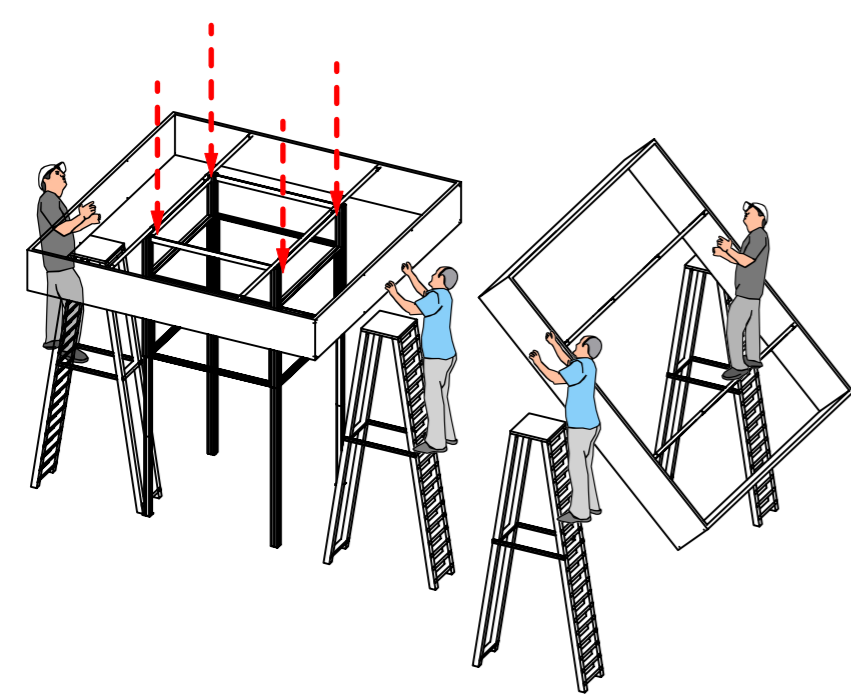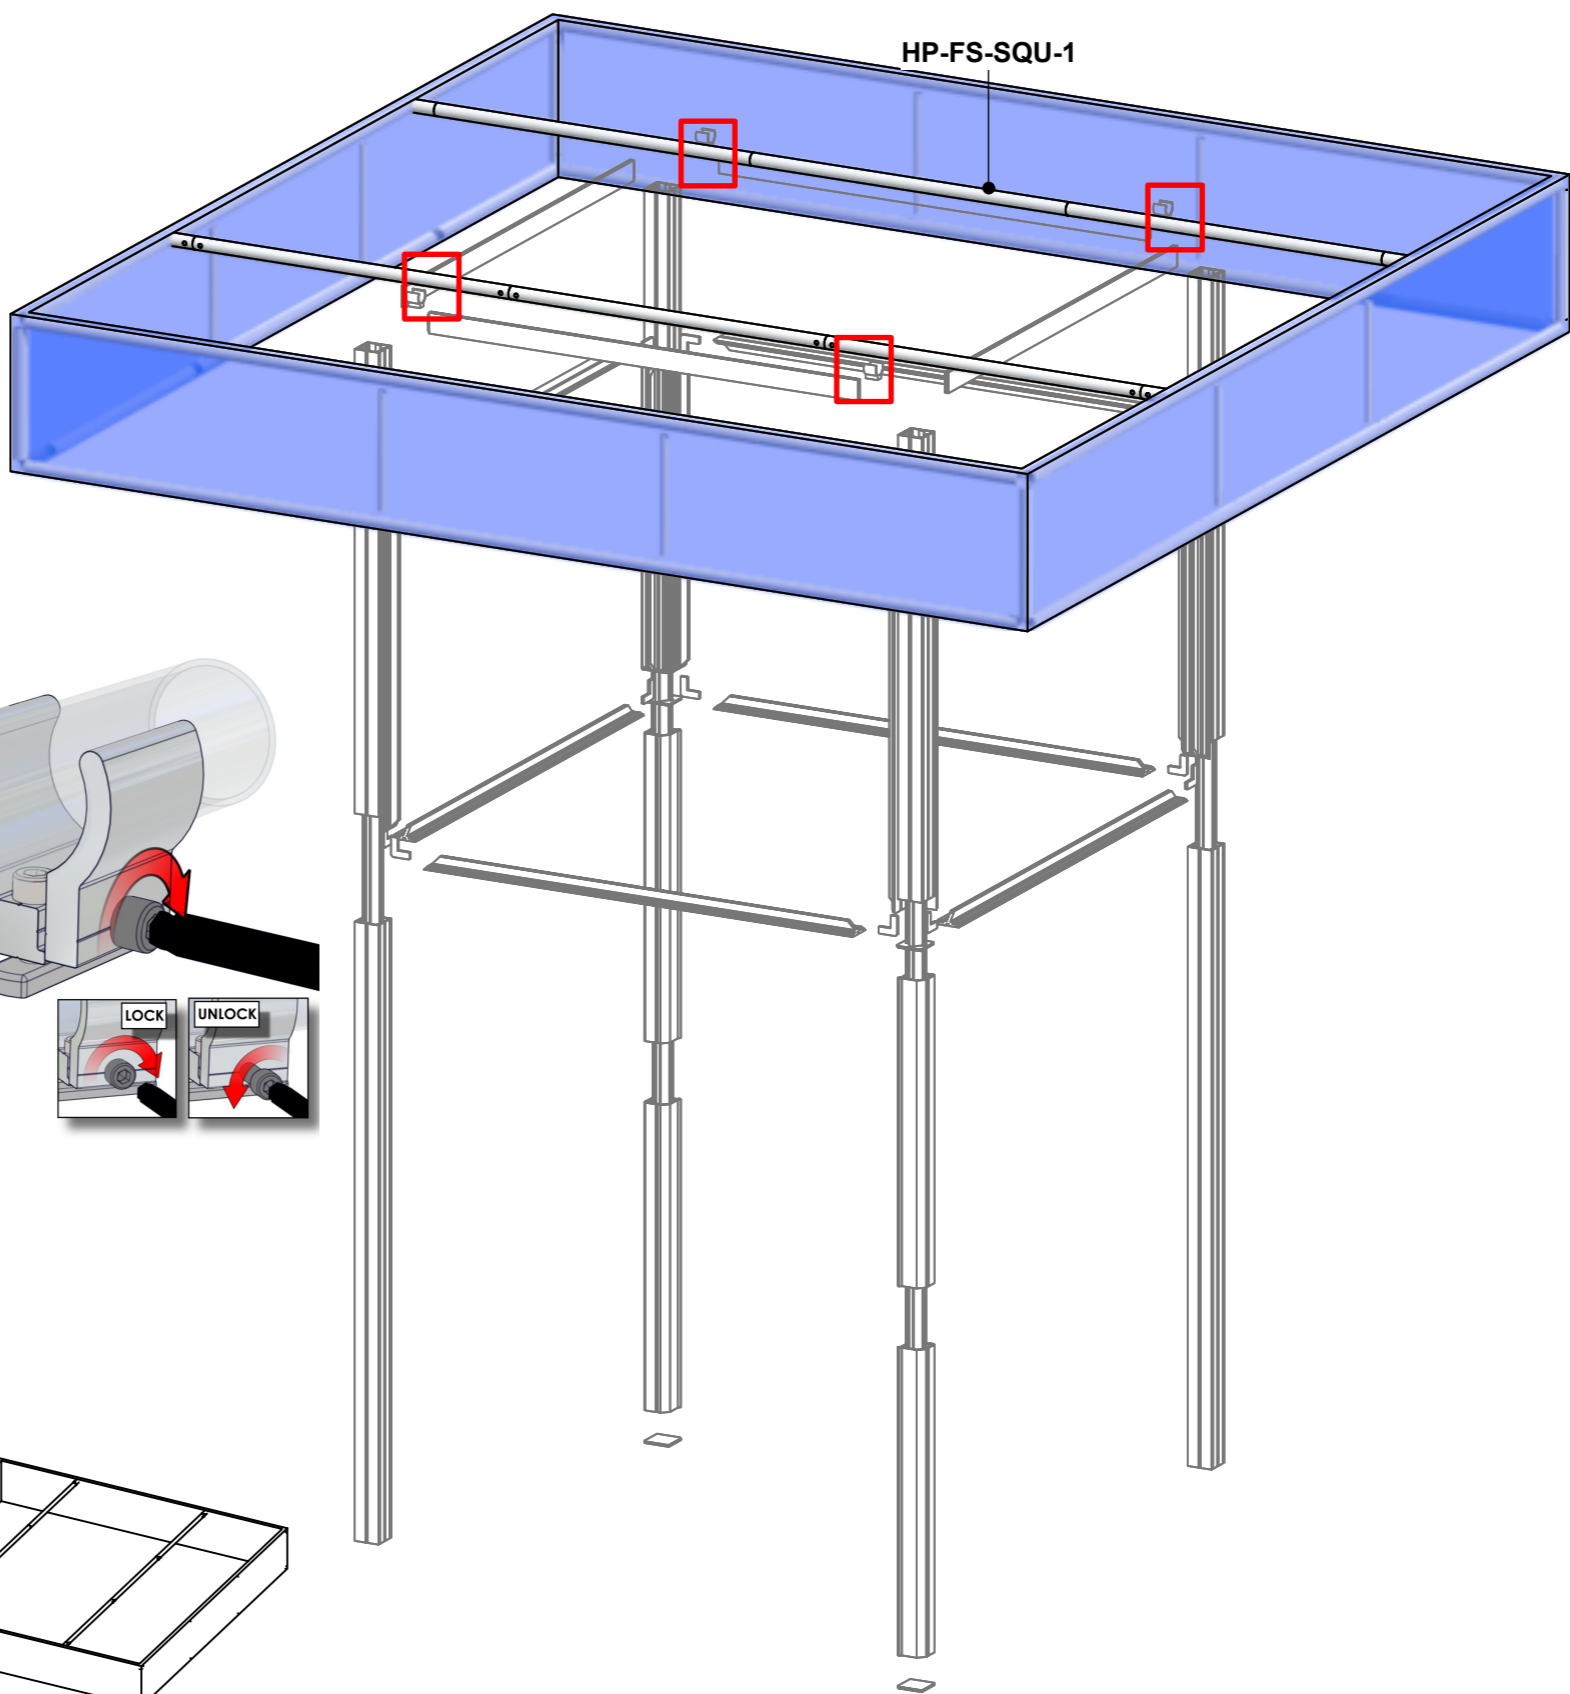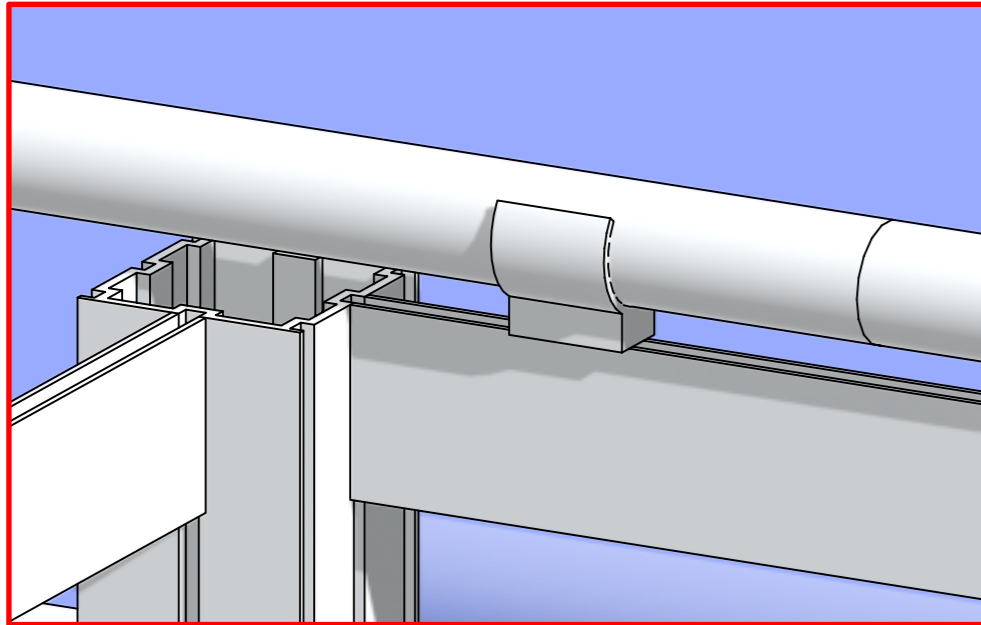

- PMFC4-90
- PM4D
- PM4S3
- PH2-300-TG
- PH2
- PM2S2
- PHFC4
- PHFC2
- PH
- PH4SC

**HYBRID PRO RENTAL KIT**  
Title: SET-UP INSTRUCTIONS

Caution sharp edges on metal parts


Code	#	Description
GRAPHIC D4	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C3	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D1	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C1	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D2	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C2	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC D3	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC C4	1	70.75"W X 47.13"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.



2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	


--- Wire running under carpet

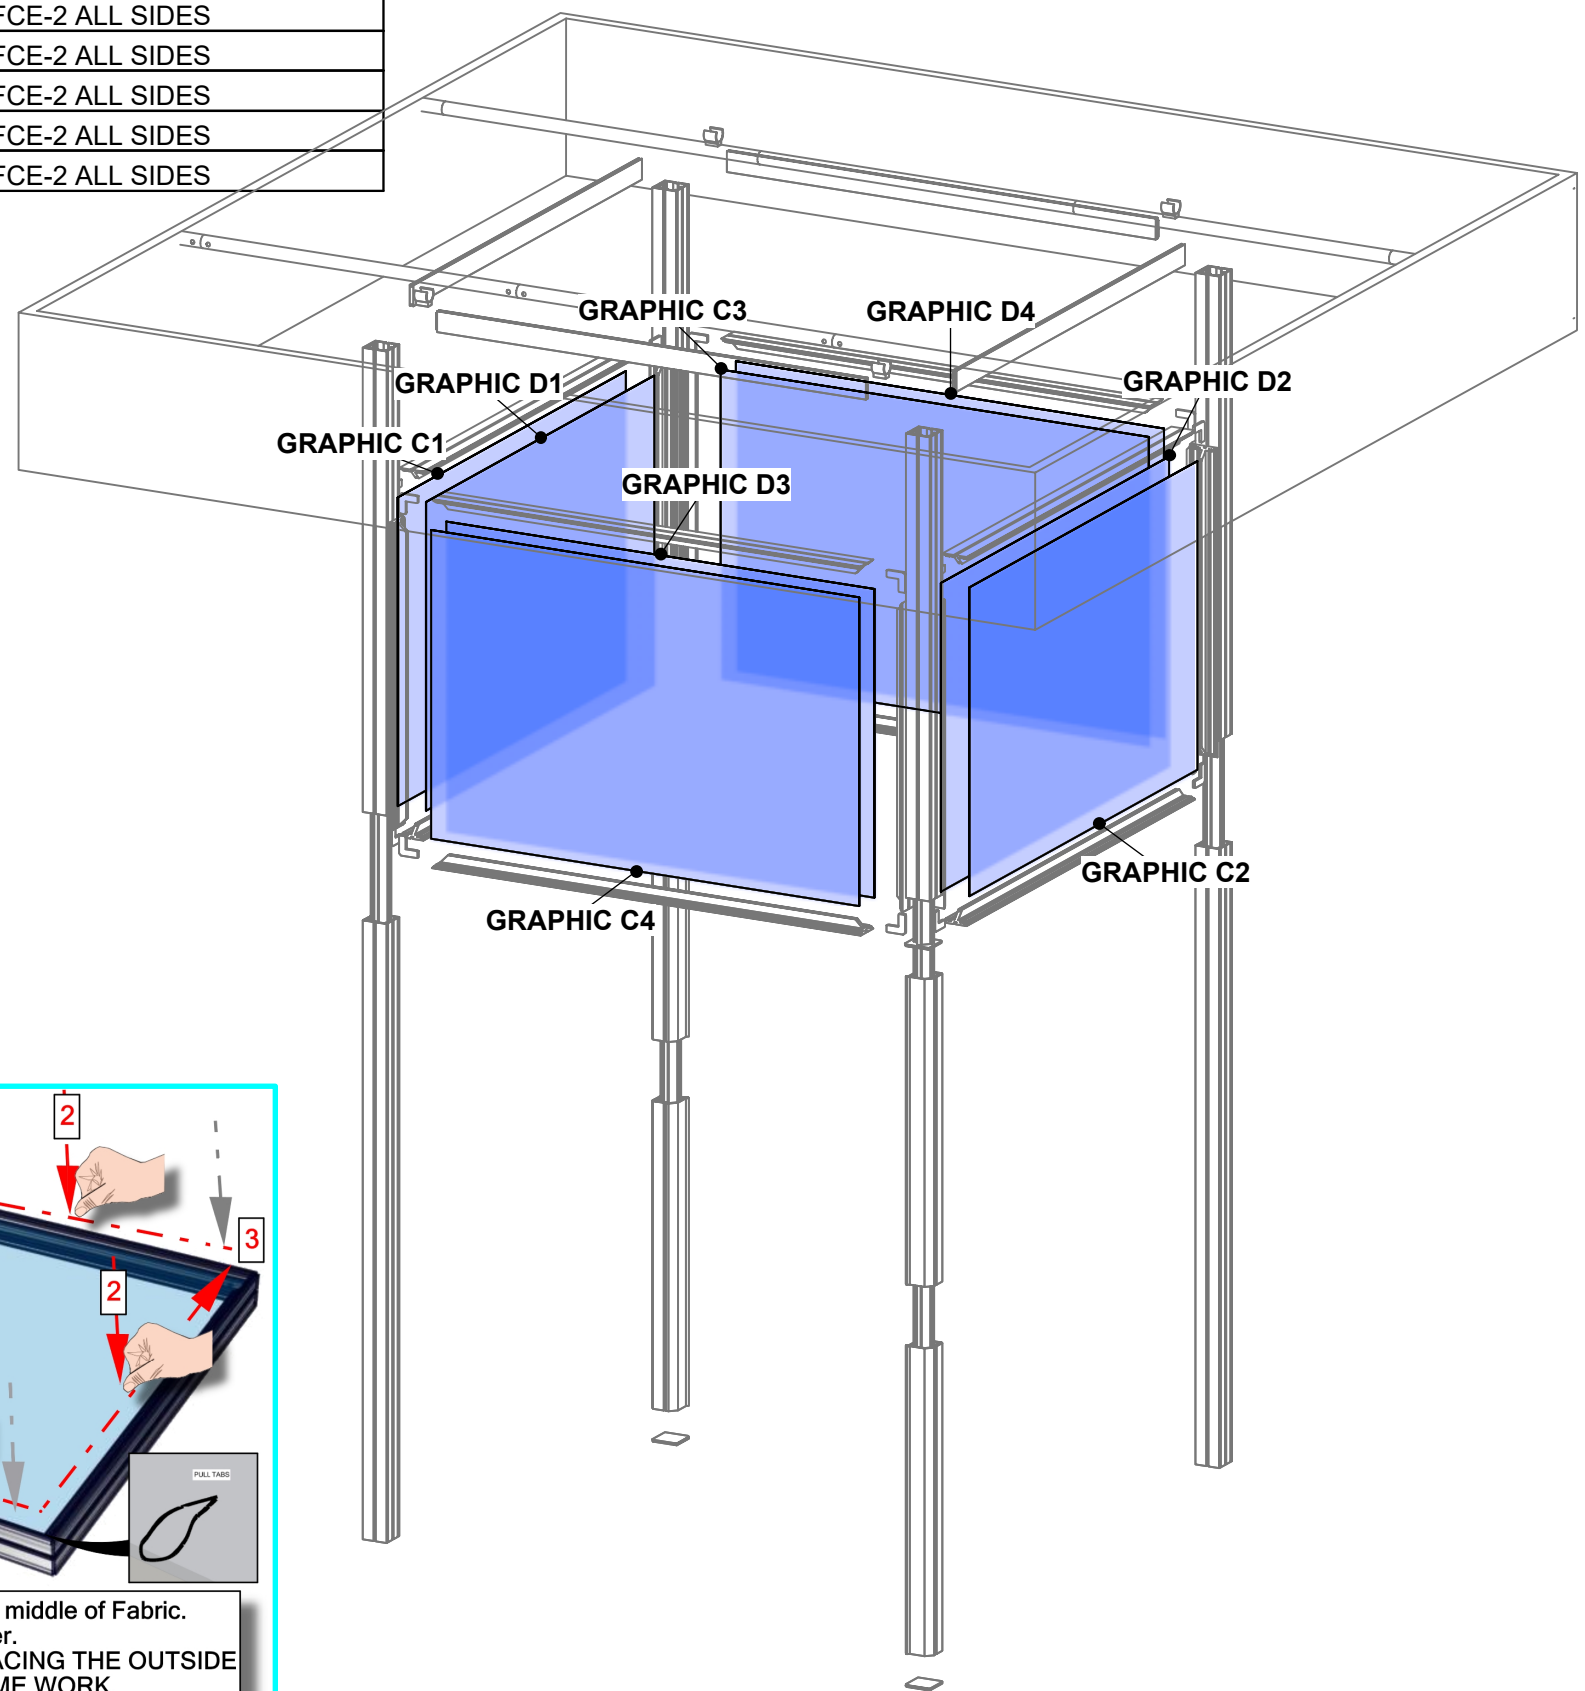


FCE-2 TO PHFC4

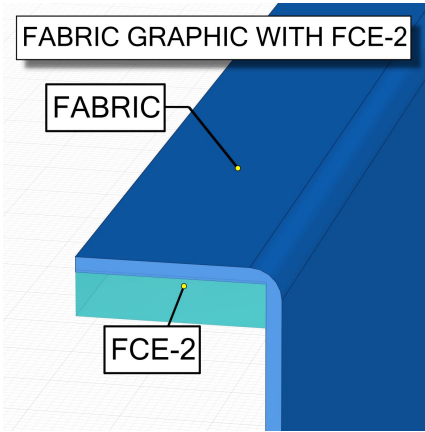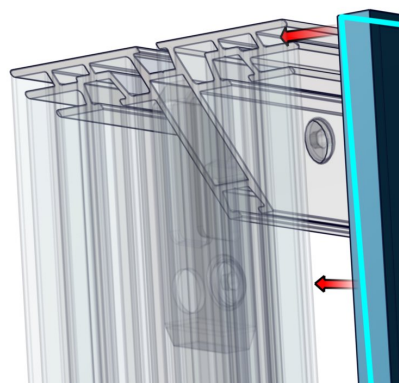

FCE-2 TO PHFC4

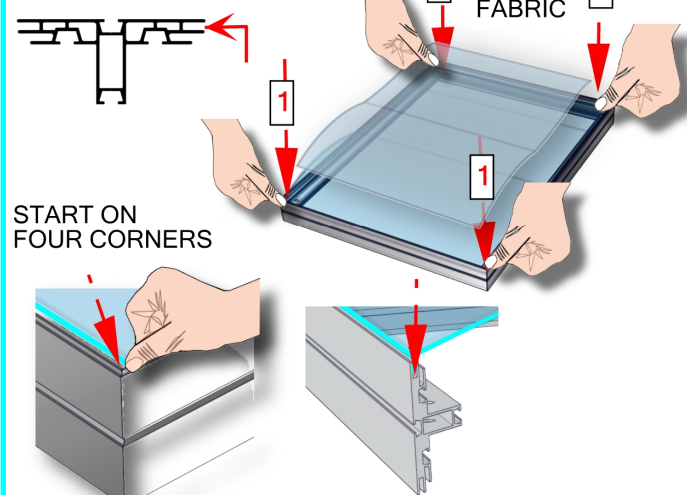

1- Install fabric by pressing the FCE-2 into 4 CORNERS of the frame.

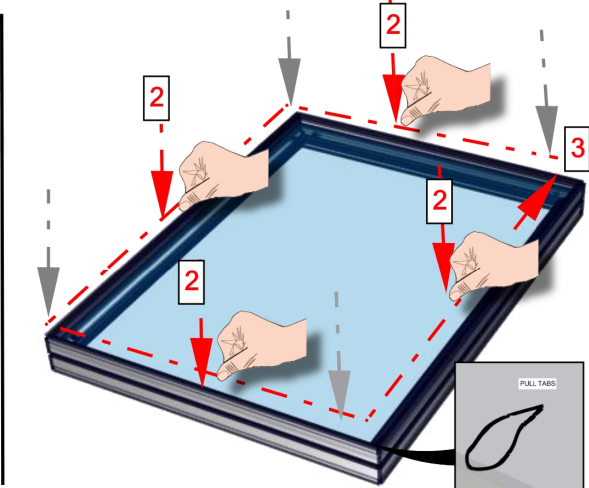

2- Then, press FCE-2 at the middle of Fabric.  
3- Press all around perimeter. MAKE SURE FABRIC IS FACING THE OUTSIDE PERIMETER OF THE FRAME WORK.

- PMFC4-90
- PM4D
- PM4S3
- PH2-300-TG
- PH2
- PM2S2
- PHFC4
- PHFC2
- PH
- PH4SC

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Caution  
sharp edges  
on metal parts








Code	#	Description
PM4S3-MM-FOOT-L	2	PM4S3 MONITOR MOUNT FOOT, LEFT
PM4S3-MM-FOOT-R	2	PM4S3 MONITOR MOUNT FOOT, RIGHT
R127	4	1200MM PM4S3 EXTRUSION WITH STOPS AT 165MM
R129	4	300MM PH2-TG EXTRUSION
R128	4	600MM PM4S3 EXTRUSION WITH STOPS AT 165MM
R130	6	350MM PH2 EXTRUSION WITH LOCKS BOTH ENDS

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

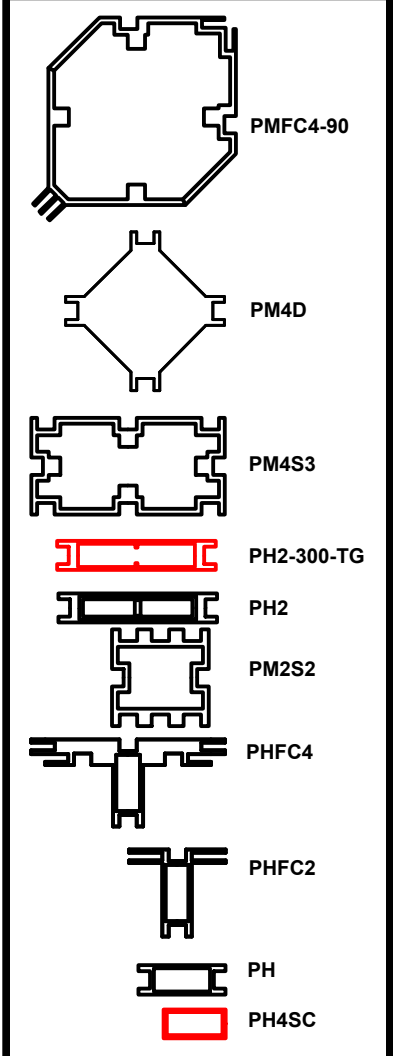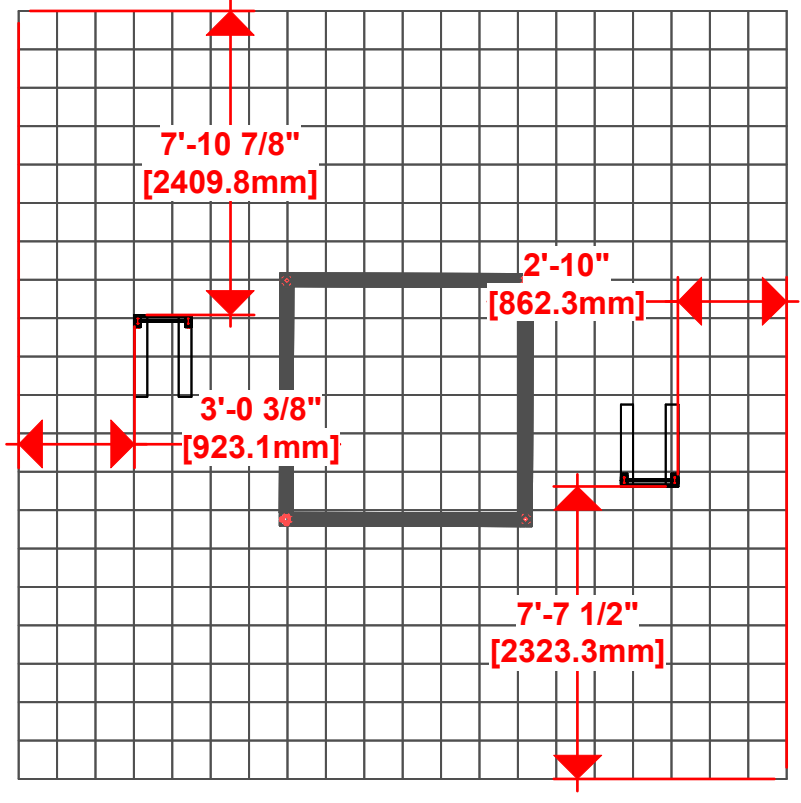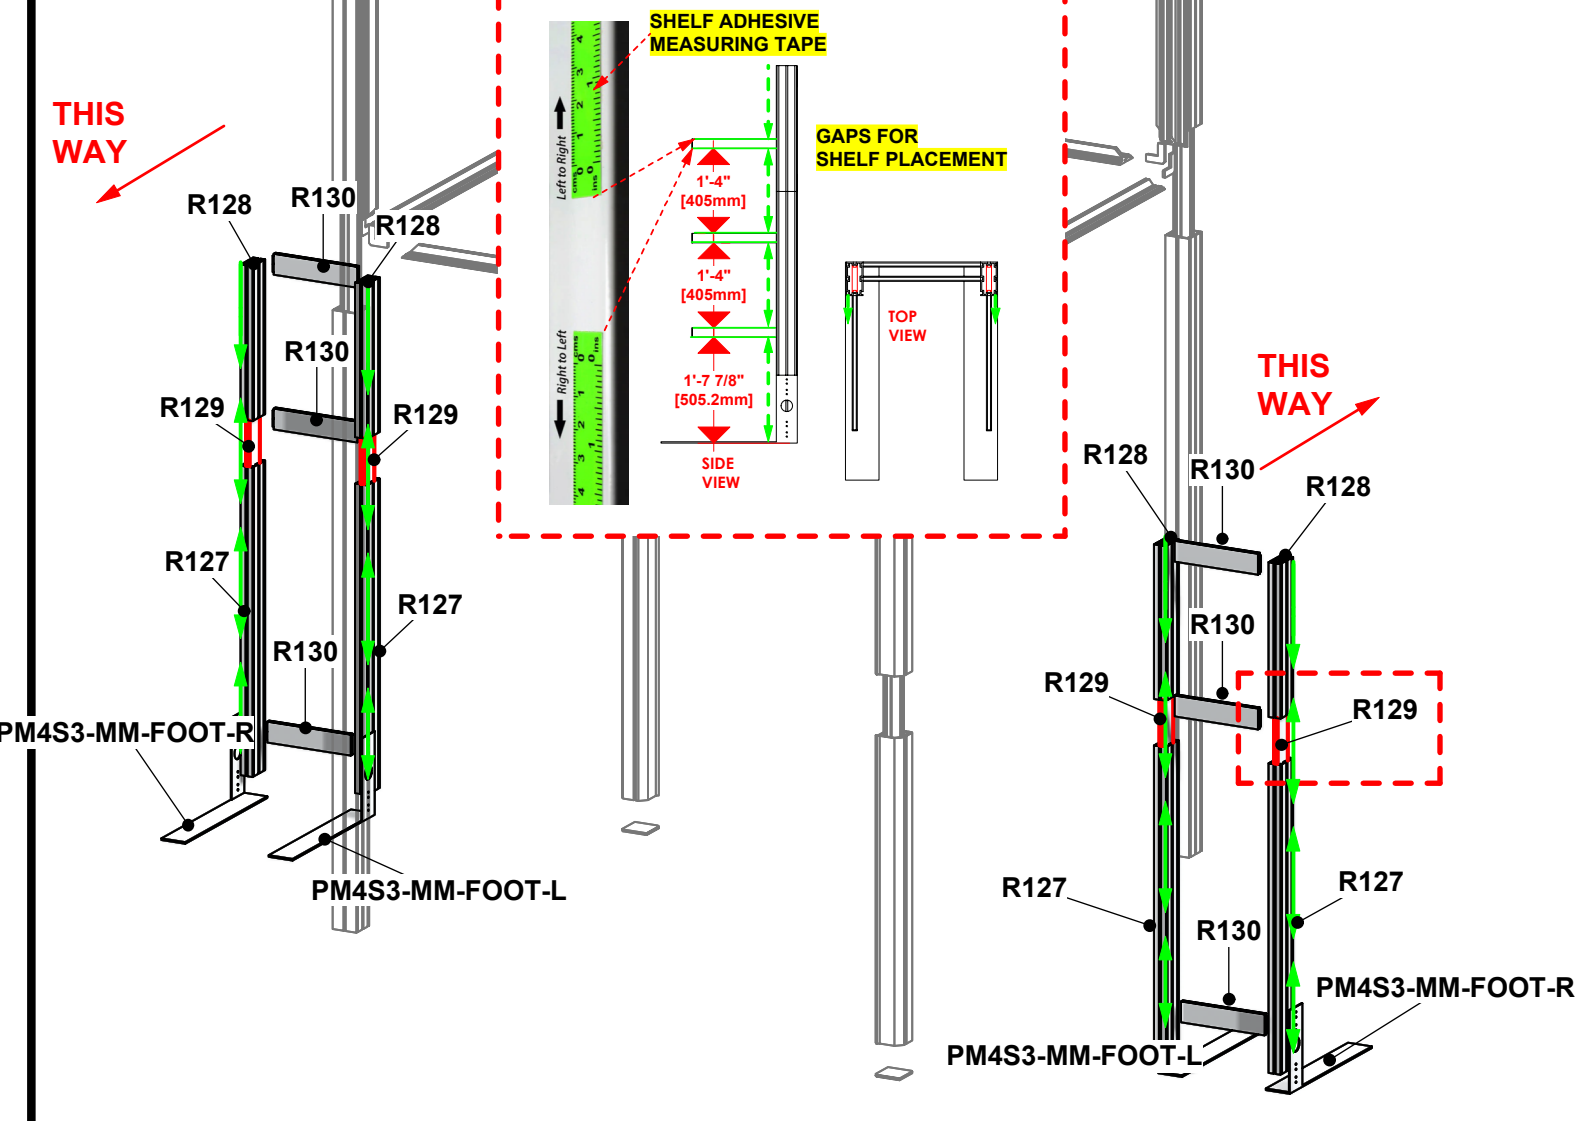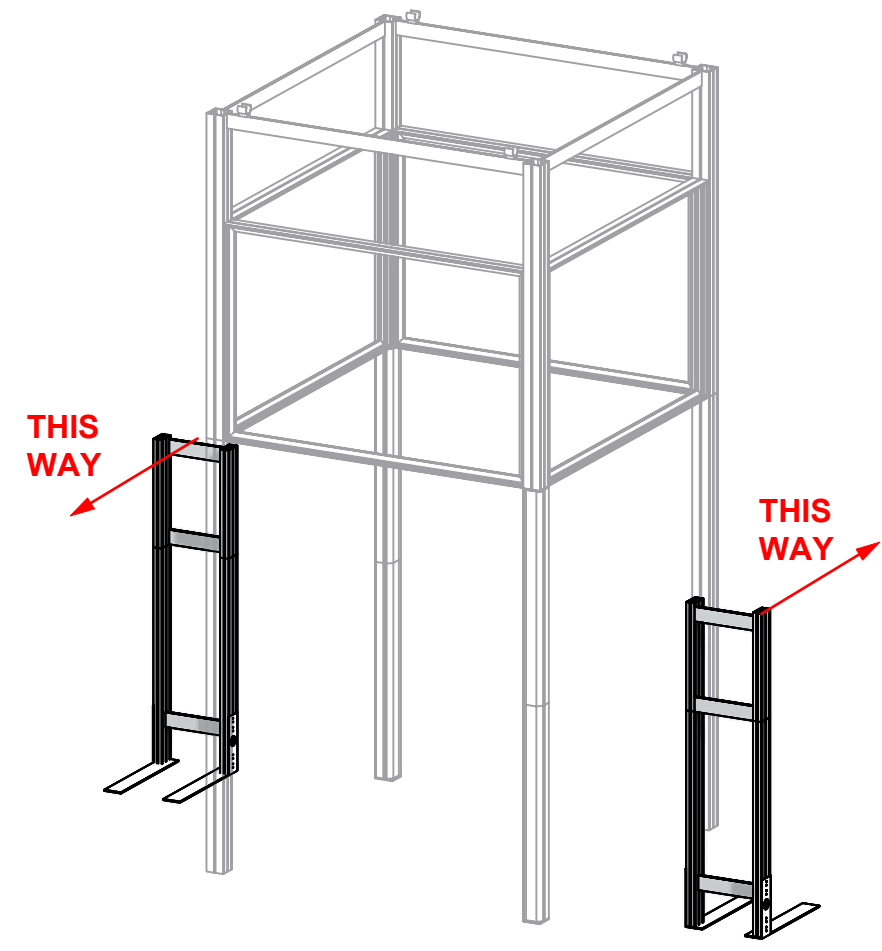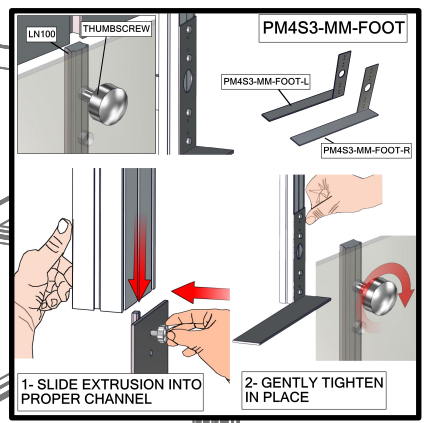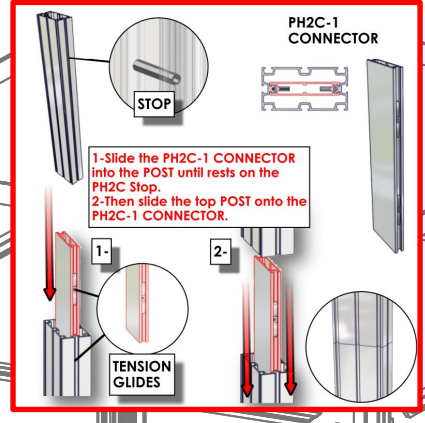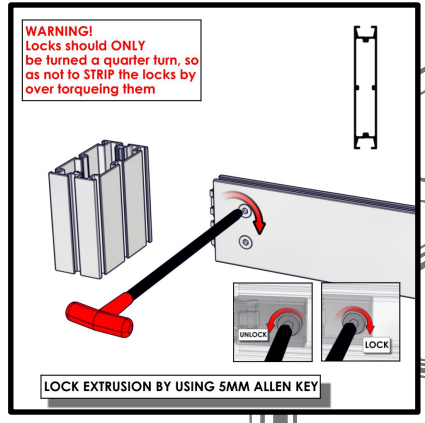


HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS



Code	#	Description
CBE-50	18	CORNER PRESSURE FIT CONNECTOR
BP-LN114-S3-4	2	FOOT PLATE, 650MM LENGTH
R122	4	1200MM PM2S2 EXTRUSION WITH STOPS AT 165MM ONE END AND NUT INSERT OTHER END
R121	8	900MM PHFC4 EXTRUSION WITH LOCKS BOTH ENDS
R124	2	300MM PH4 EXTRUSION WITH TENSION GLIDES
R13	2	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
PMFC4-90-CA	4	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90
R120	4	1193MM PMFC4-90 EXTRUSION WITH STOPS AT 315MM
50MM TUBE-3	4	50MM TUBE-30-ASY




1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.








2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrubion)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

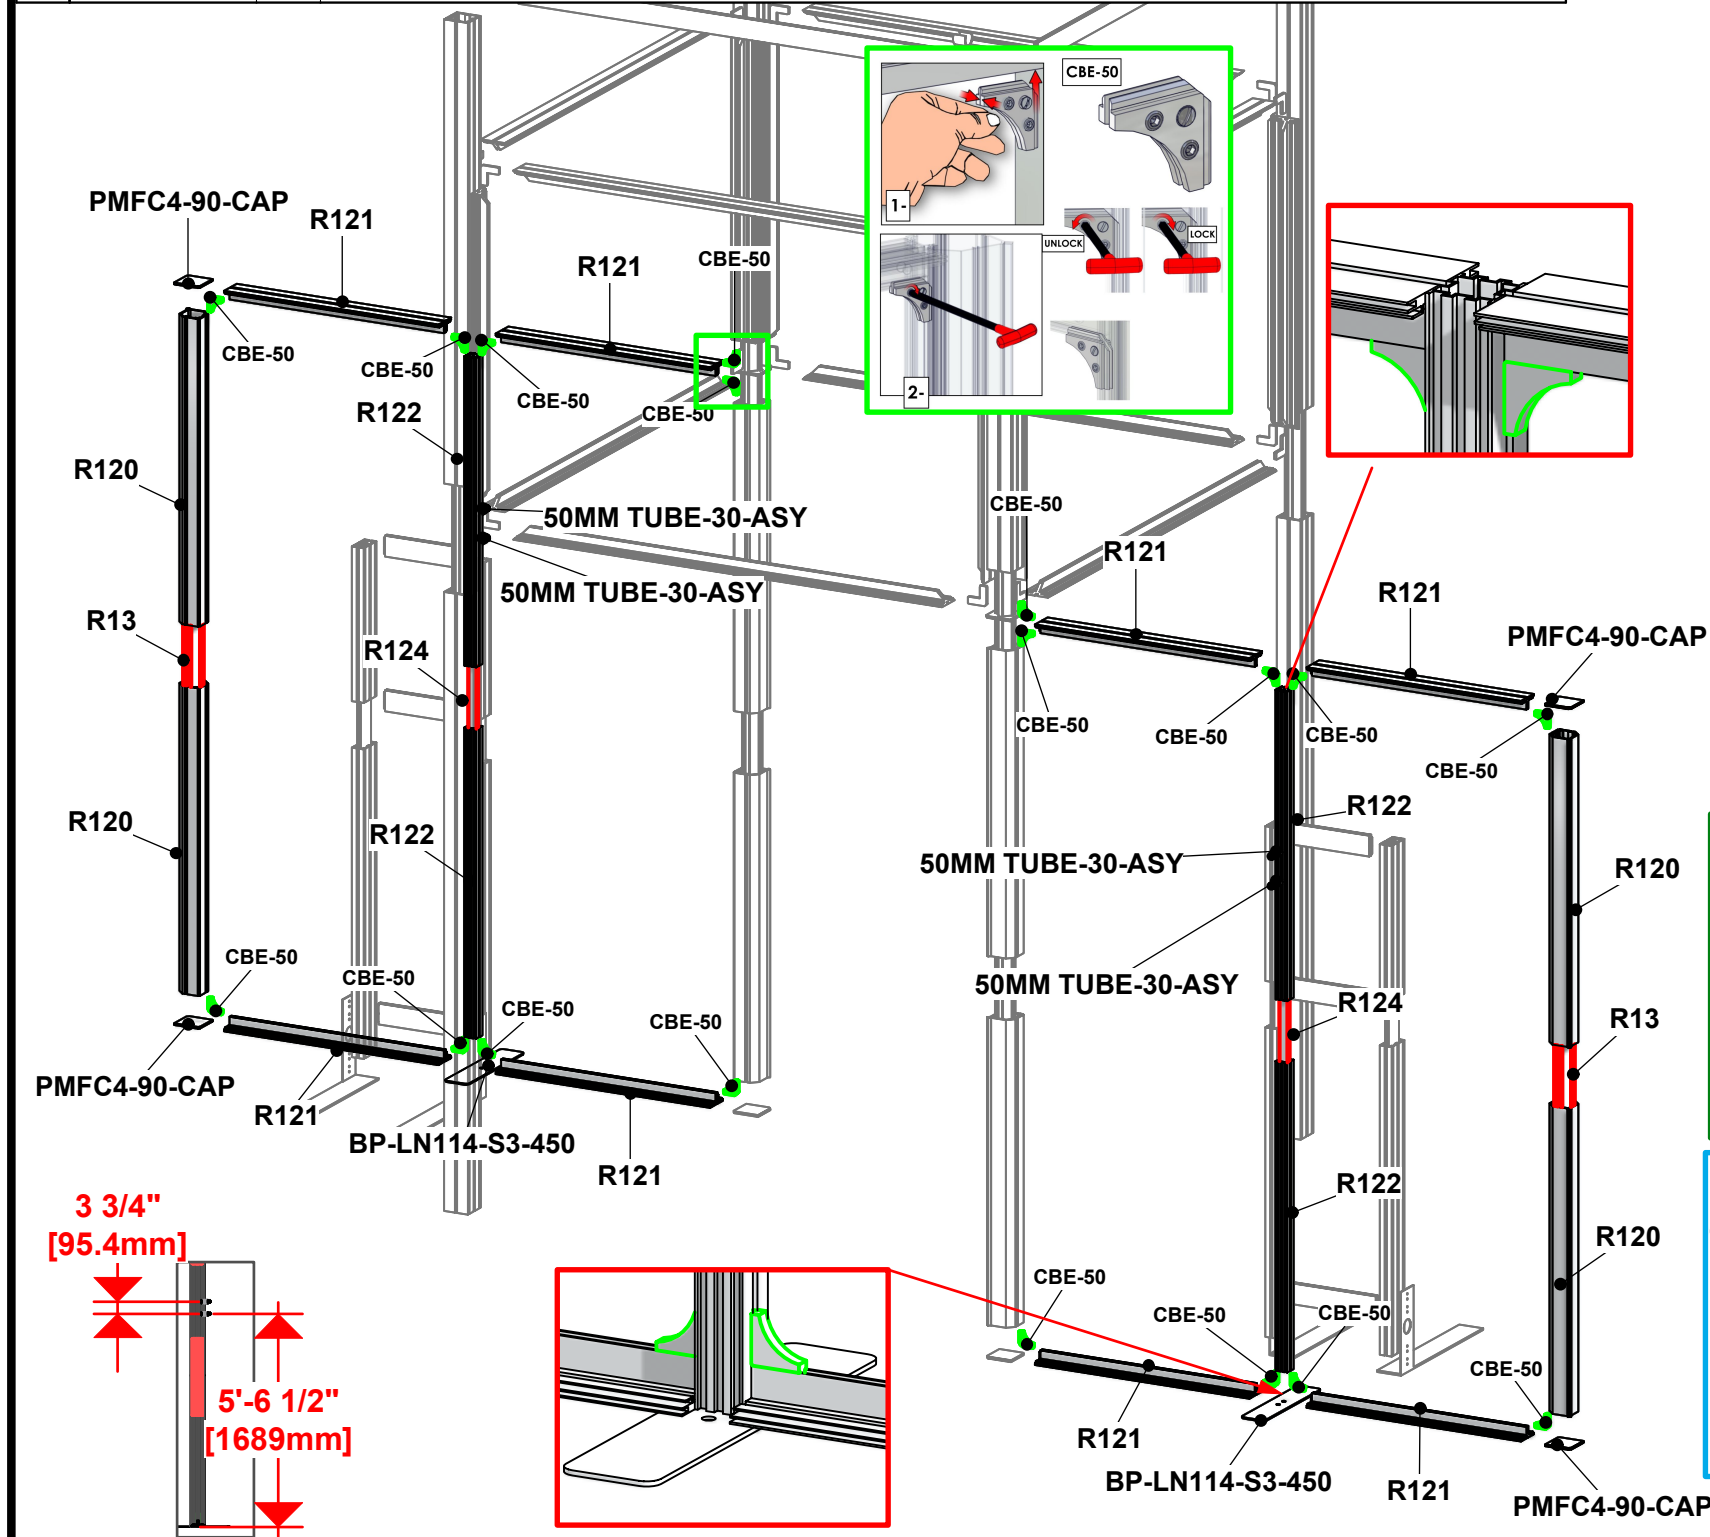

THIS WAY

THIS WAY

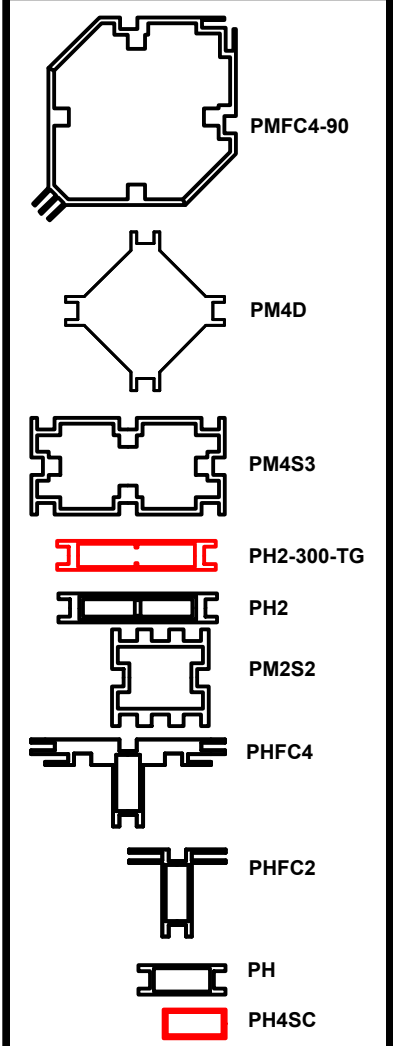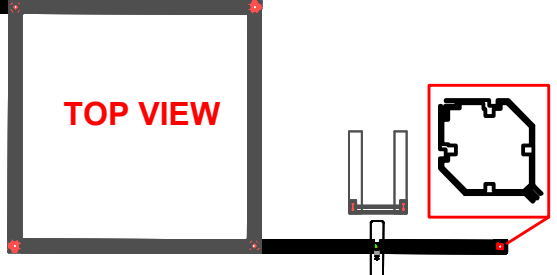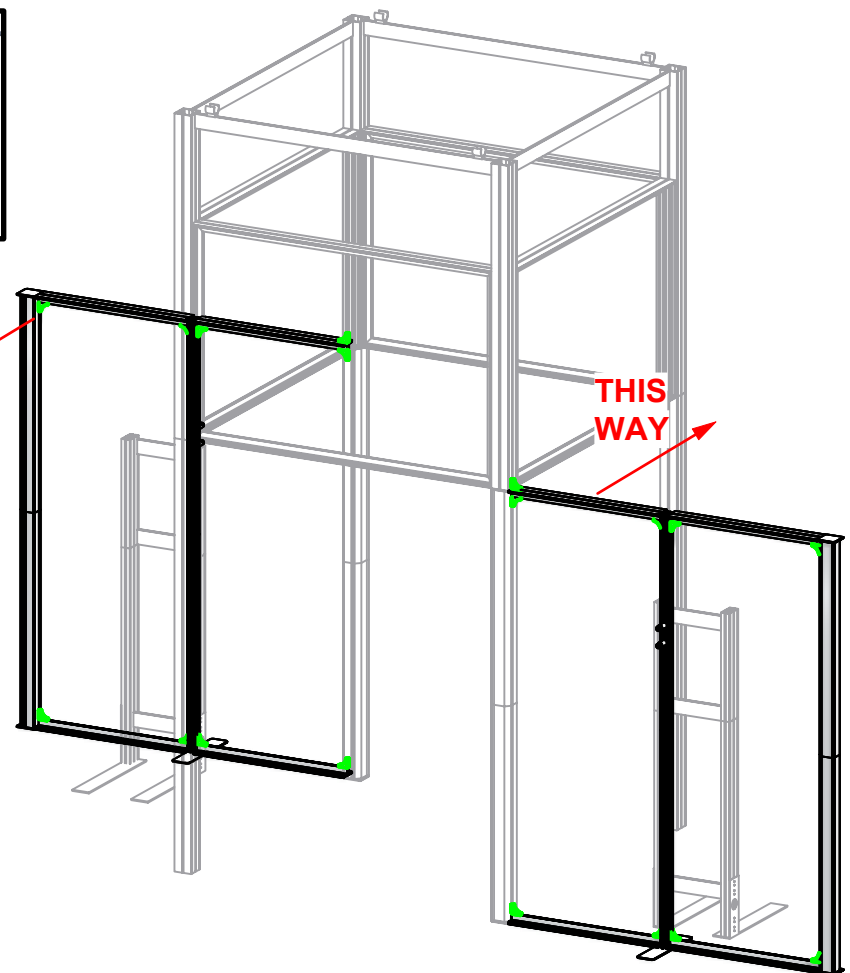


**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS




Code	#	Description
R137	8	300MM PHFC4 EXTRUSION WITH LOCKS BOTH ENDS
R13	4	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
PMFC4-90-CAP	8	INJECTION MOLDED PLASTIC END CAP FOR PMFC4-90
R120	8	1193MM PMFC4-90 EXTRUSION WITH STOPS AT 315MM


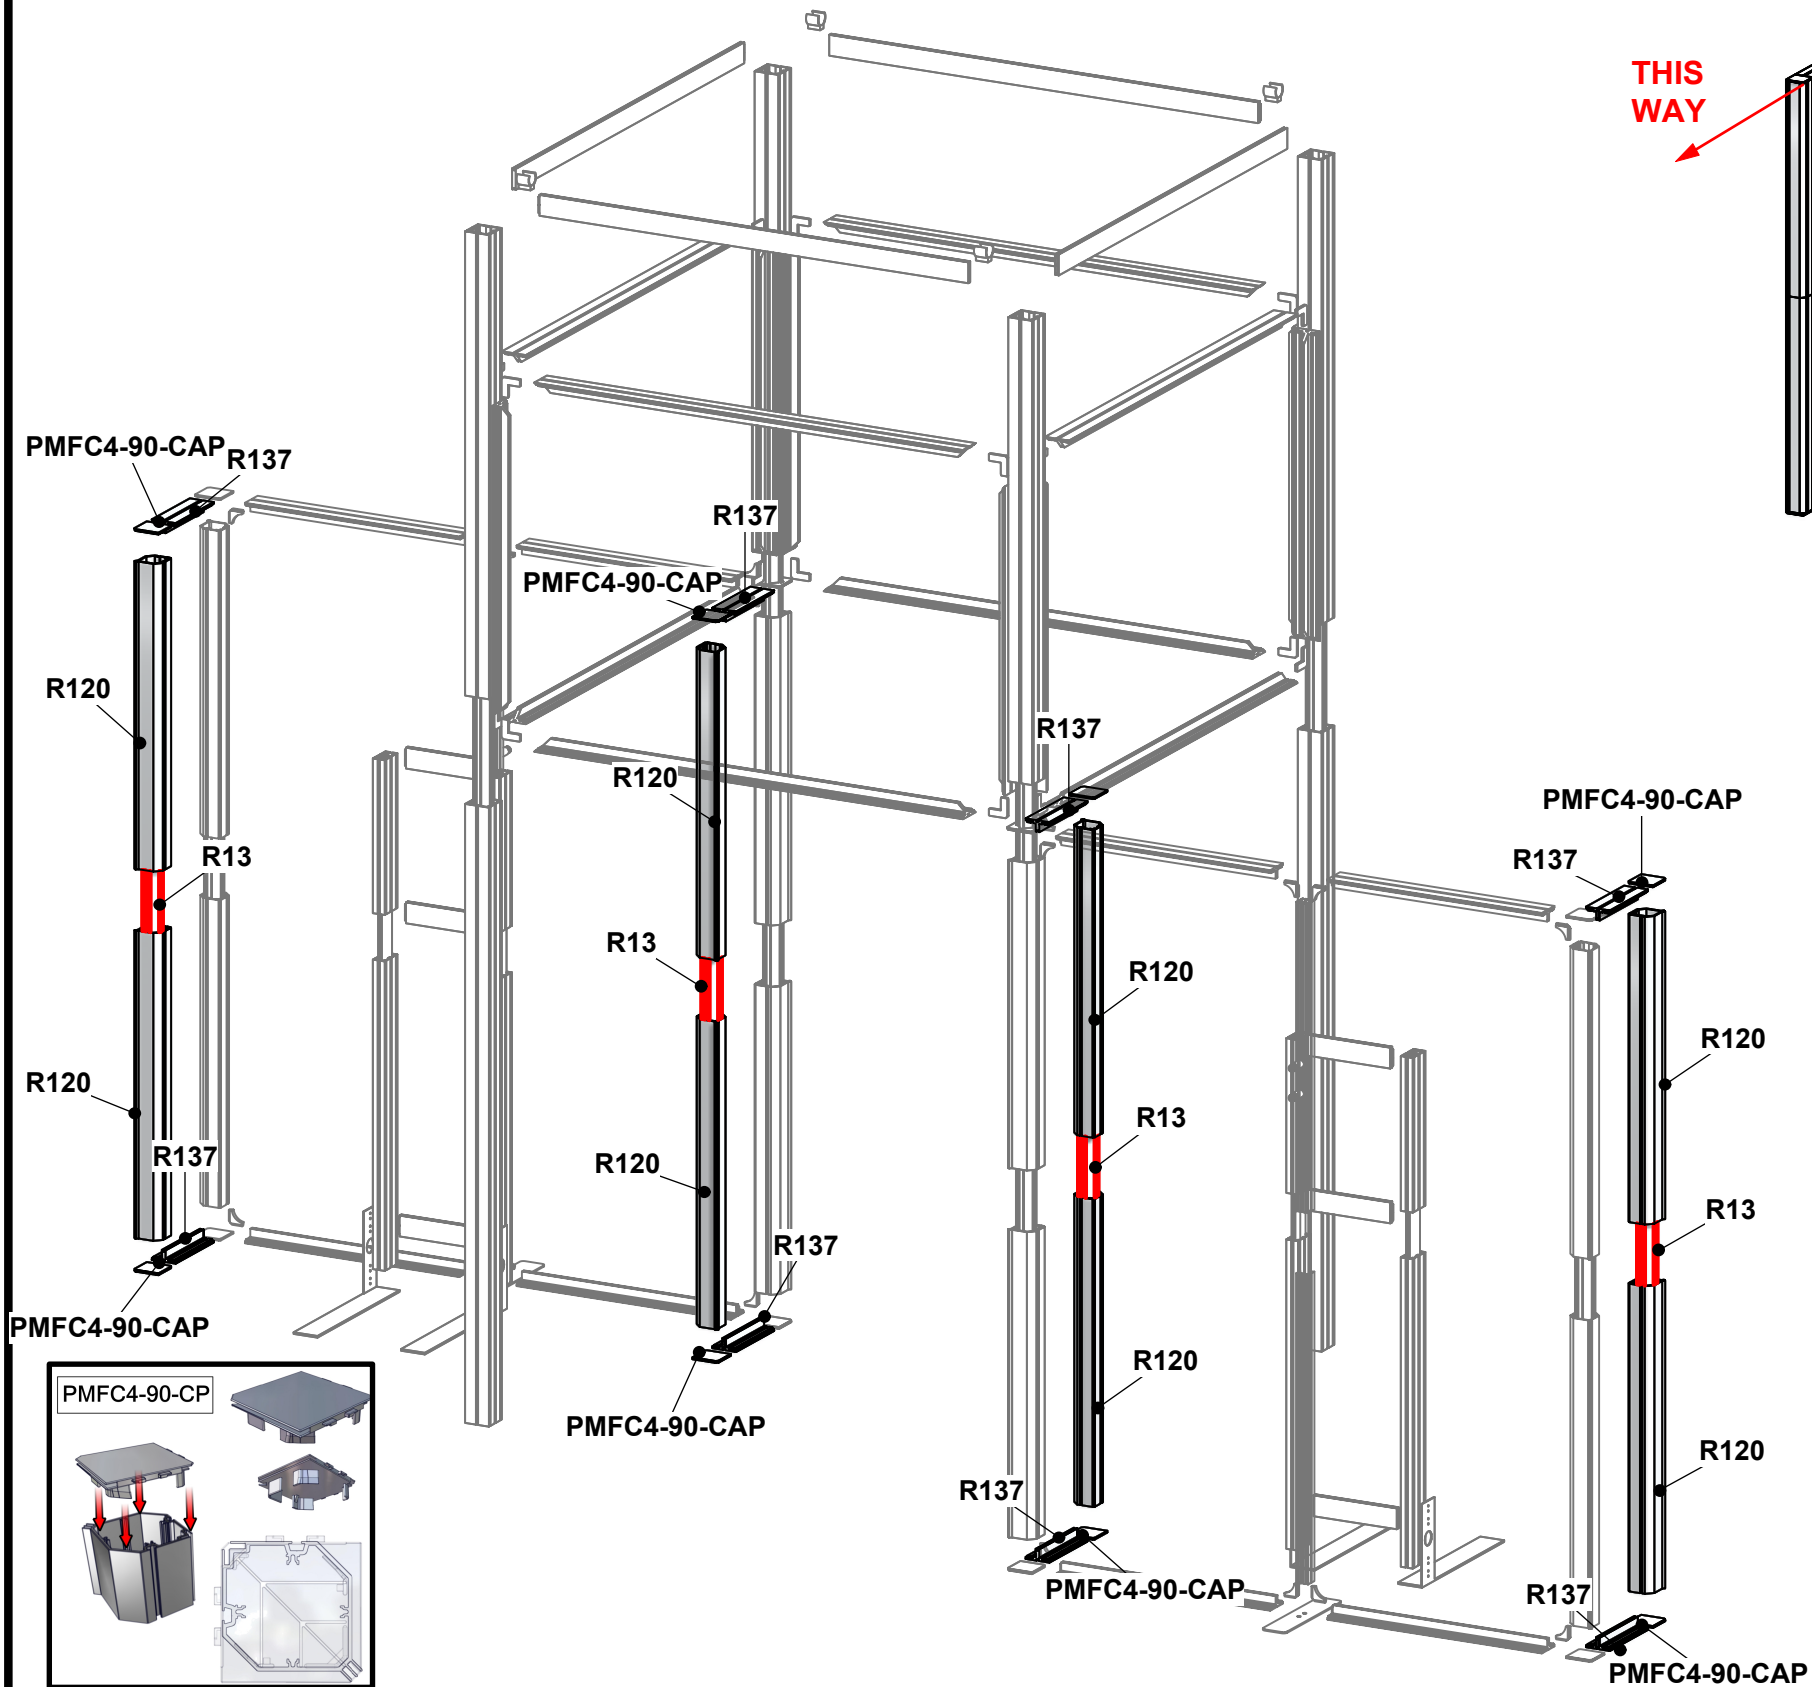


THIS WAY

THIS WAY

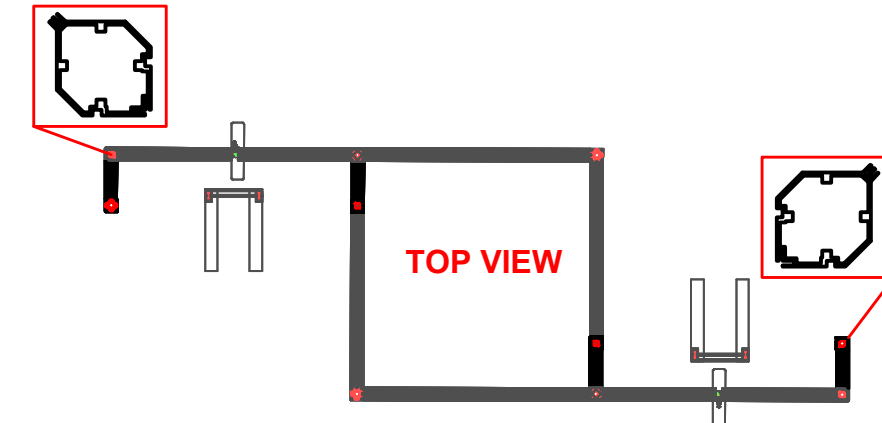


TOP VIEW

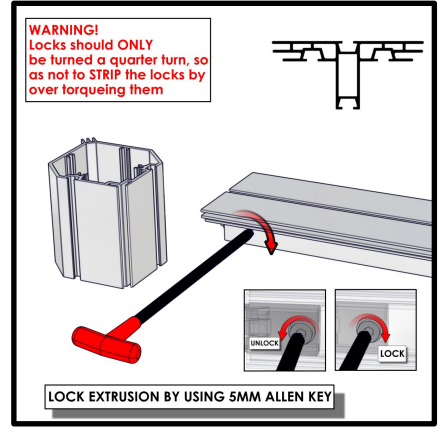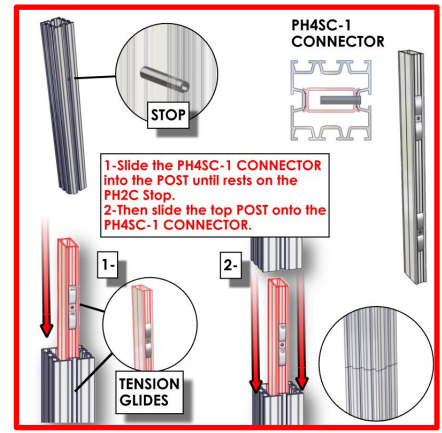

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	Wire running under carpet
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	


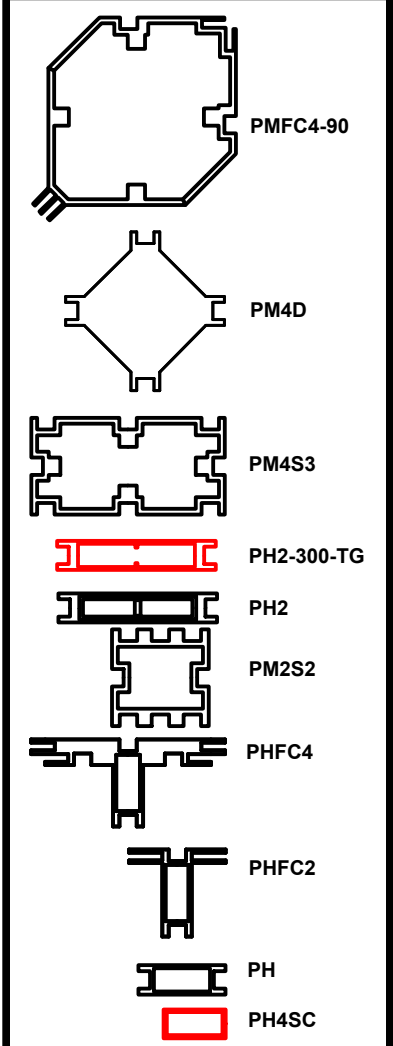


**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS





Caution sharp edges on metal parts

Code	#	Description
CBE-50	16	CORNER PRESSURE FIT CONNECTOR
R121	8	900MM PHFC4 EXTRUSION WITH LOCKS BOTH ENDS
BP-LN114-S3-450	2	FOOT PLATE, 650MM LENGTH
R122	4	1200MM PM2S2 EXTRUSION WITH STOPS AT 165MM ONE END AND NUT INSERT OTHER END
R124	2	300MM PH4 EXTRUSION WITH TENSION GLIDES

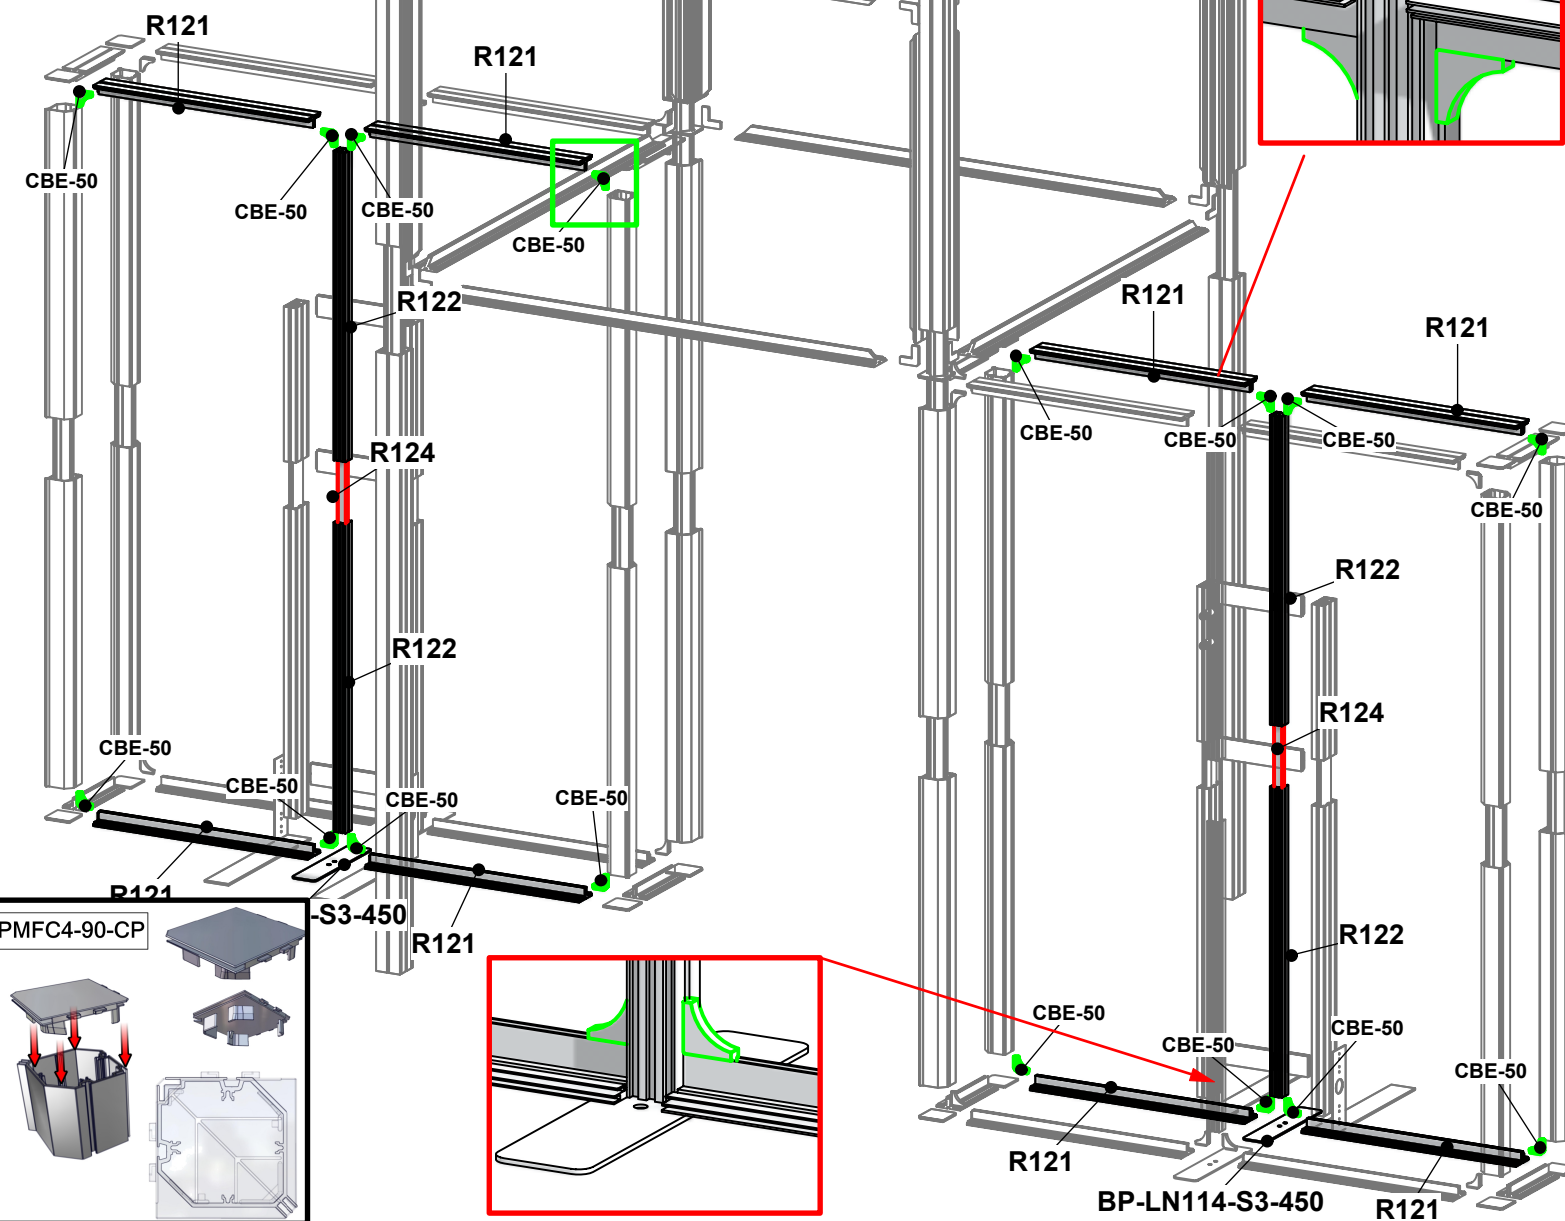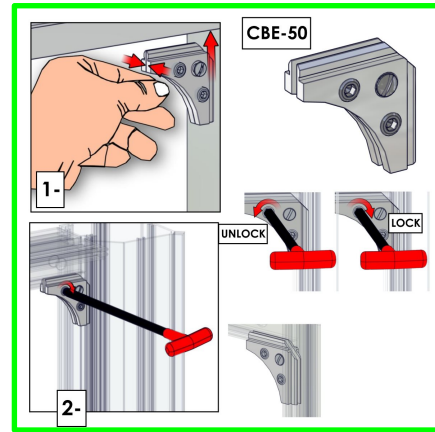

THIS WAY

THIS WAY

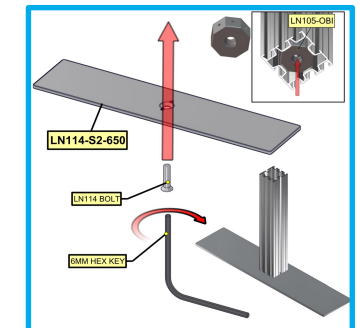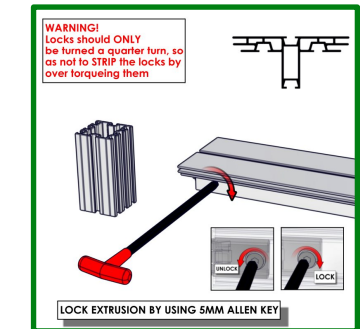


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distruption)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

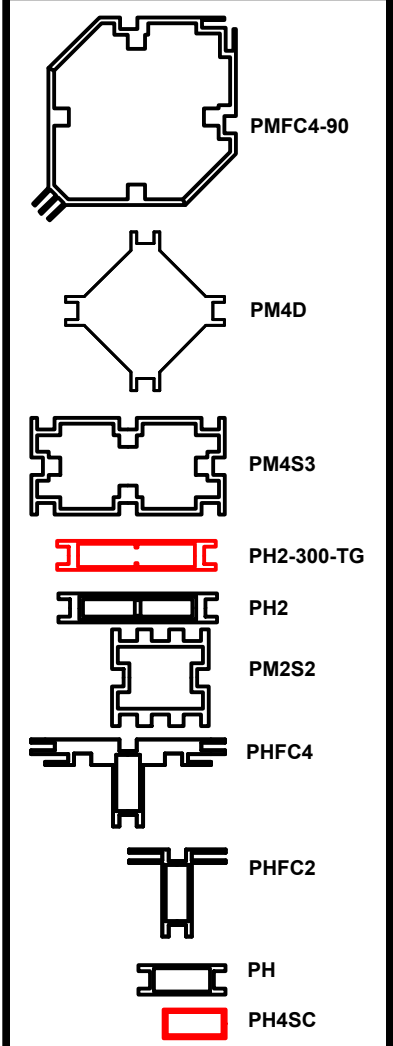

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS









Code	#	Description
CB9	8	90 DEGREE JOINER
R138	4	600MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 BOTH ENDS
R10	8	1200MM PHFC4 EXTRUSION WITH MITRE CUT FOR CB9 ONE END AND IB2 LOCK HOLE OTHER END
SW-FOOT-650-LN	2	SMART WALL FOOT , CUT DOWN TO 425MM
IB2	4	JOINER BAR
R142	2	510MM PH1 EXTRUSION WITH LOCKS BOTH ENDS

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	


--- Wire running under carpet

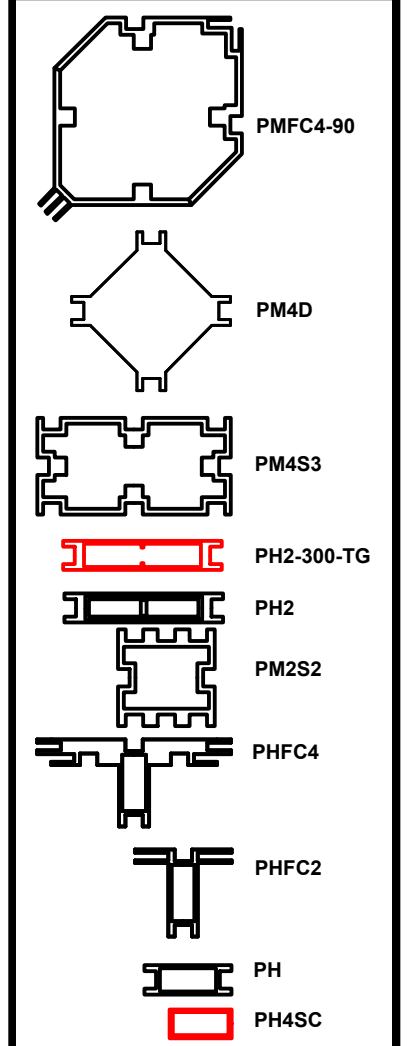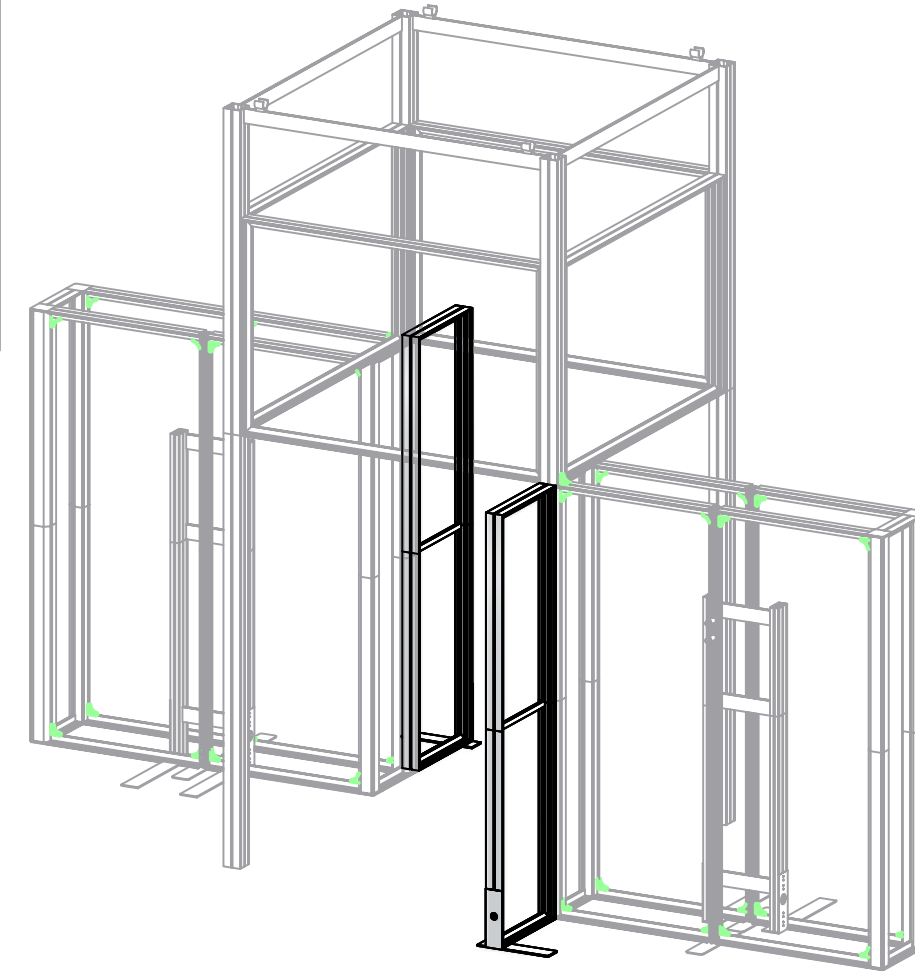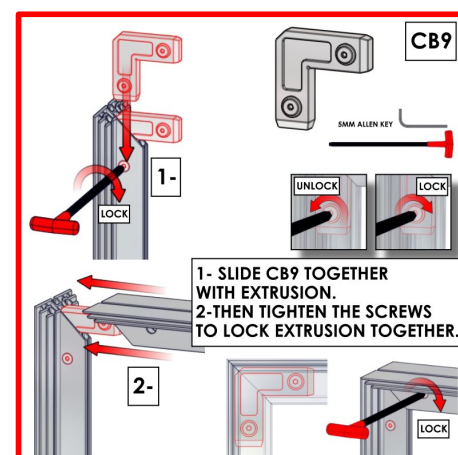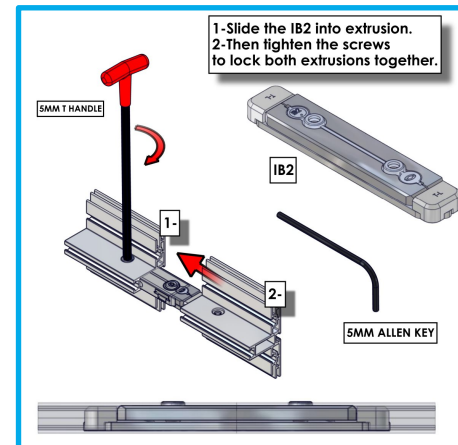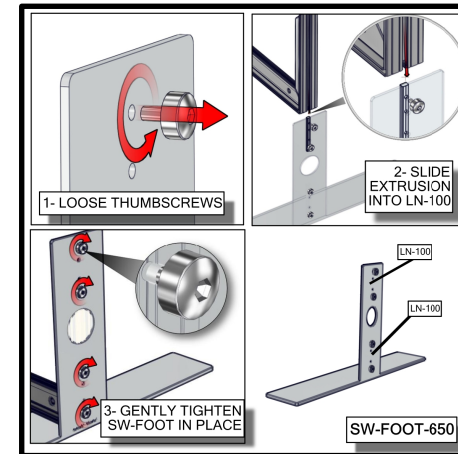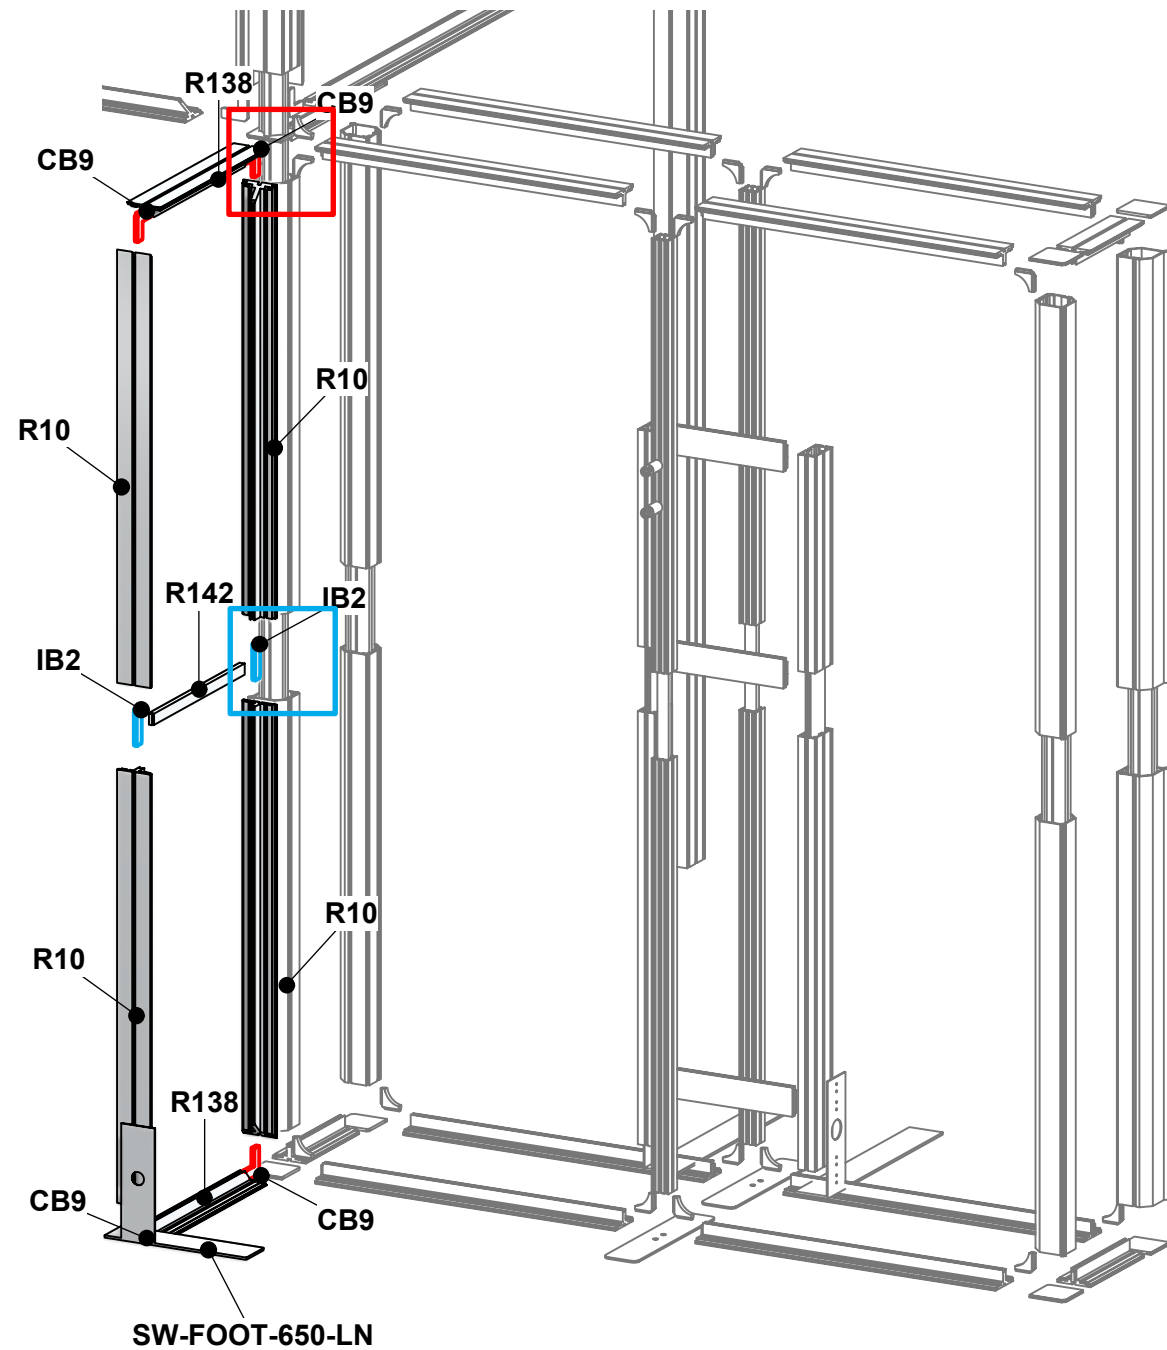

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS





**BUILD X2 UNITS**

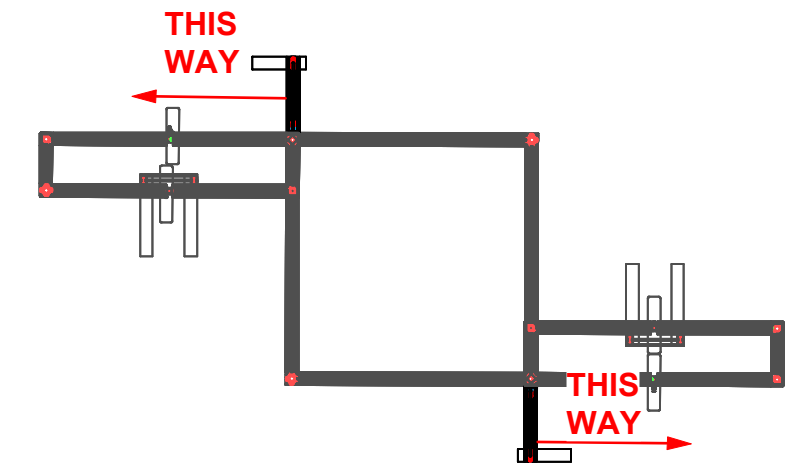

Caution sharp edges on metal parts

12

Code	#	Description
CBE-50	25	CORNER PRESSURE FIT CONNECTOR
FC-50-SPCR	16	FC-50-SPCR - FRAME CHANNEL SPACER IN ABS

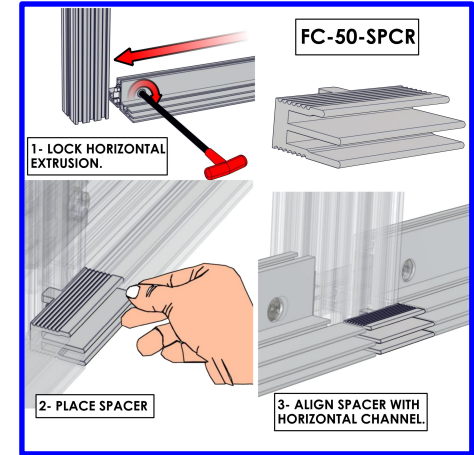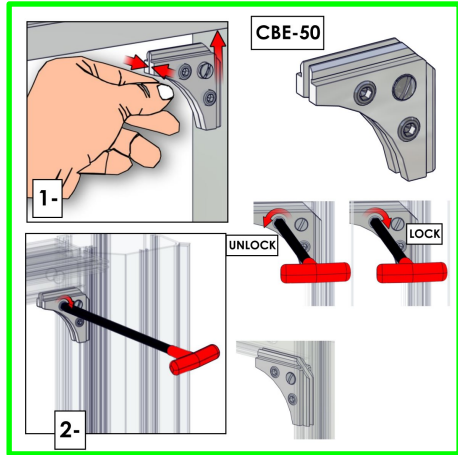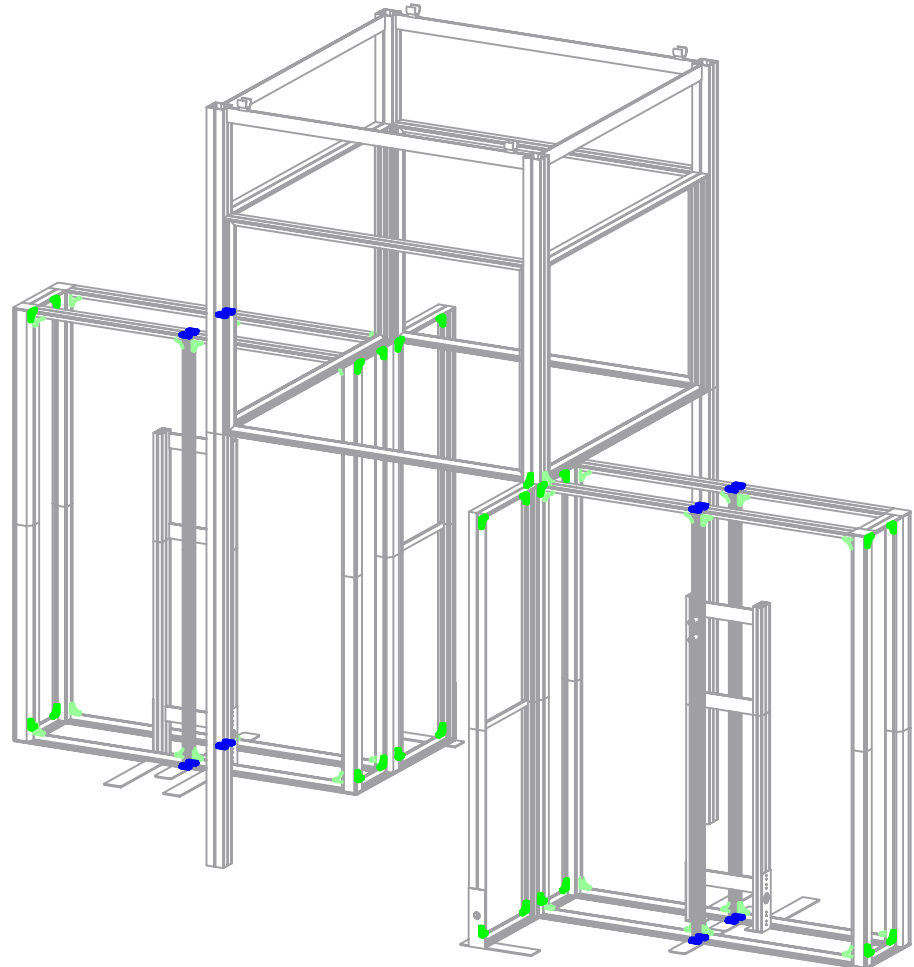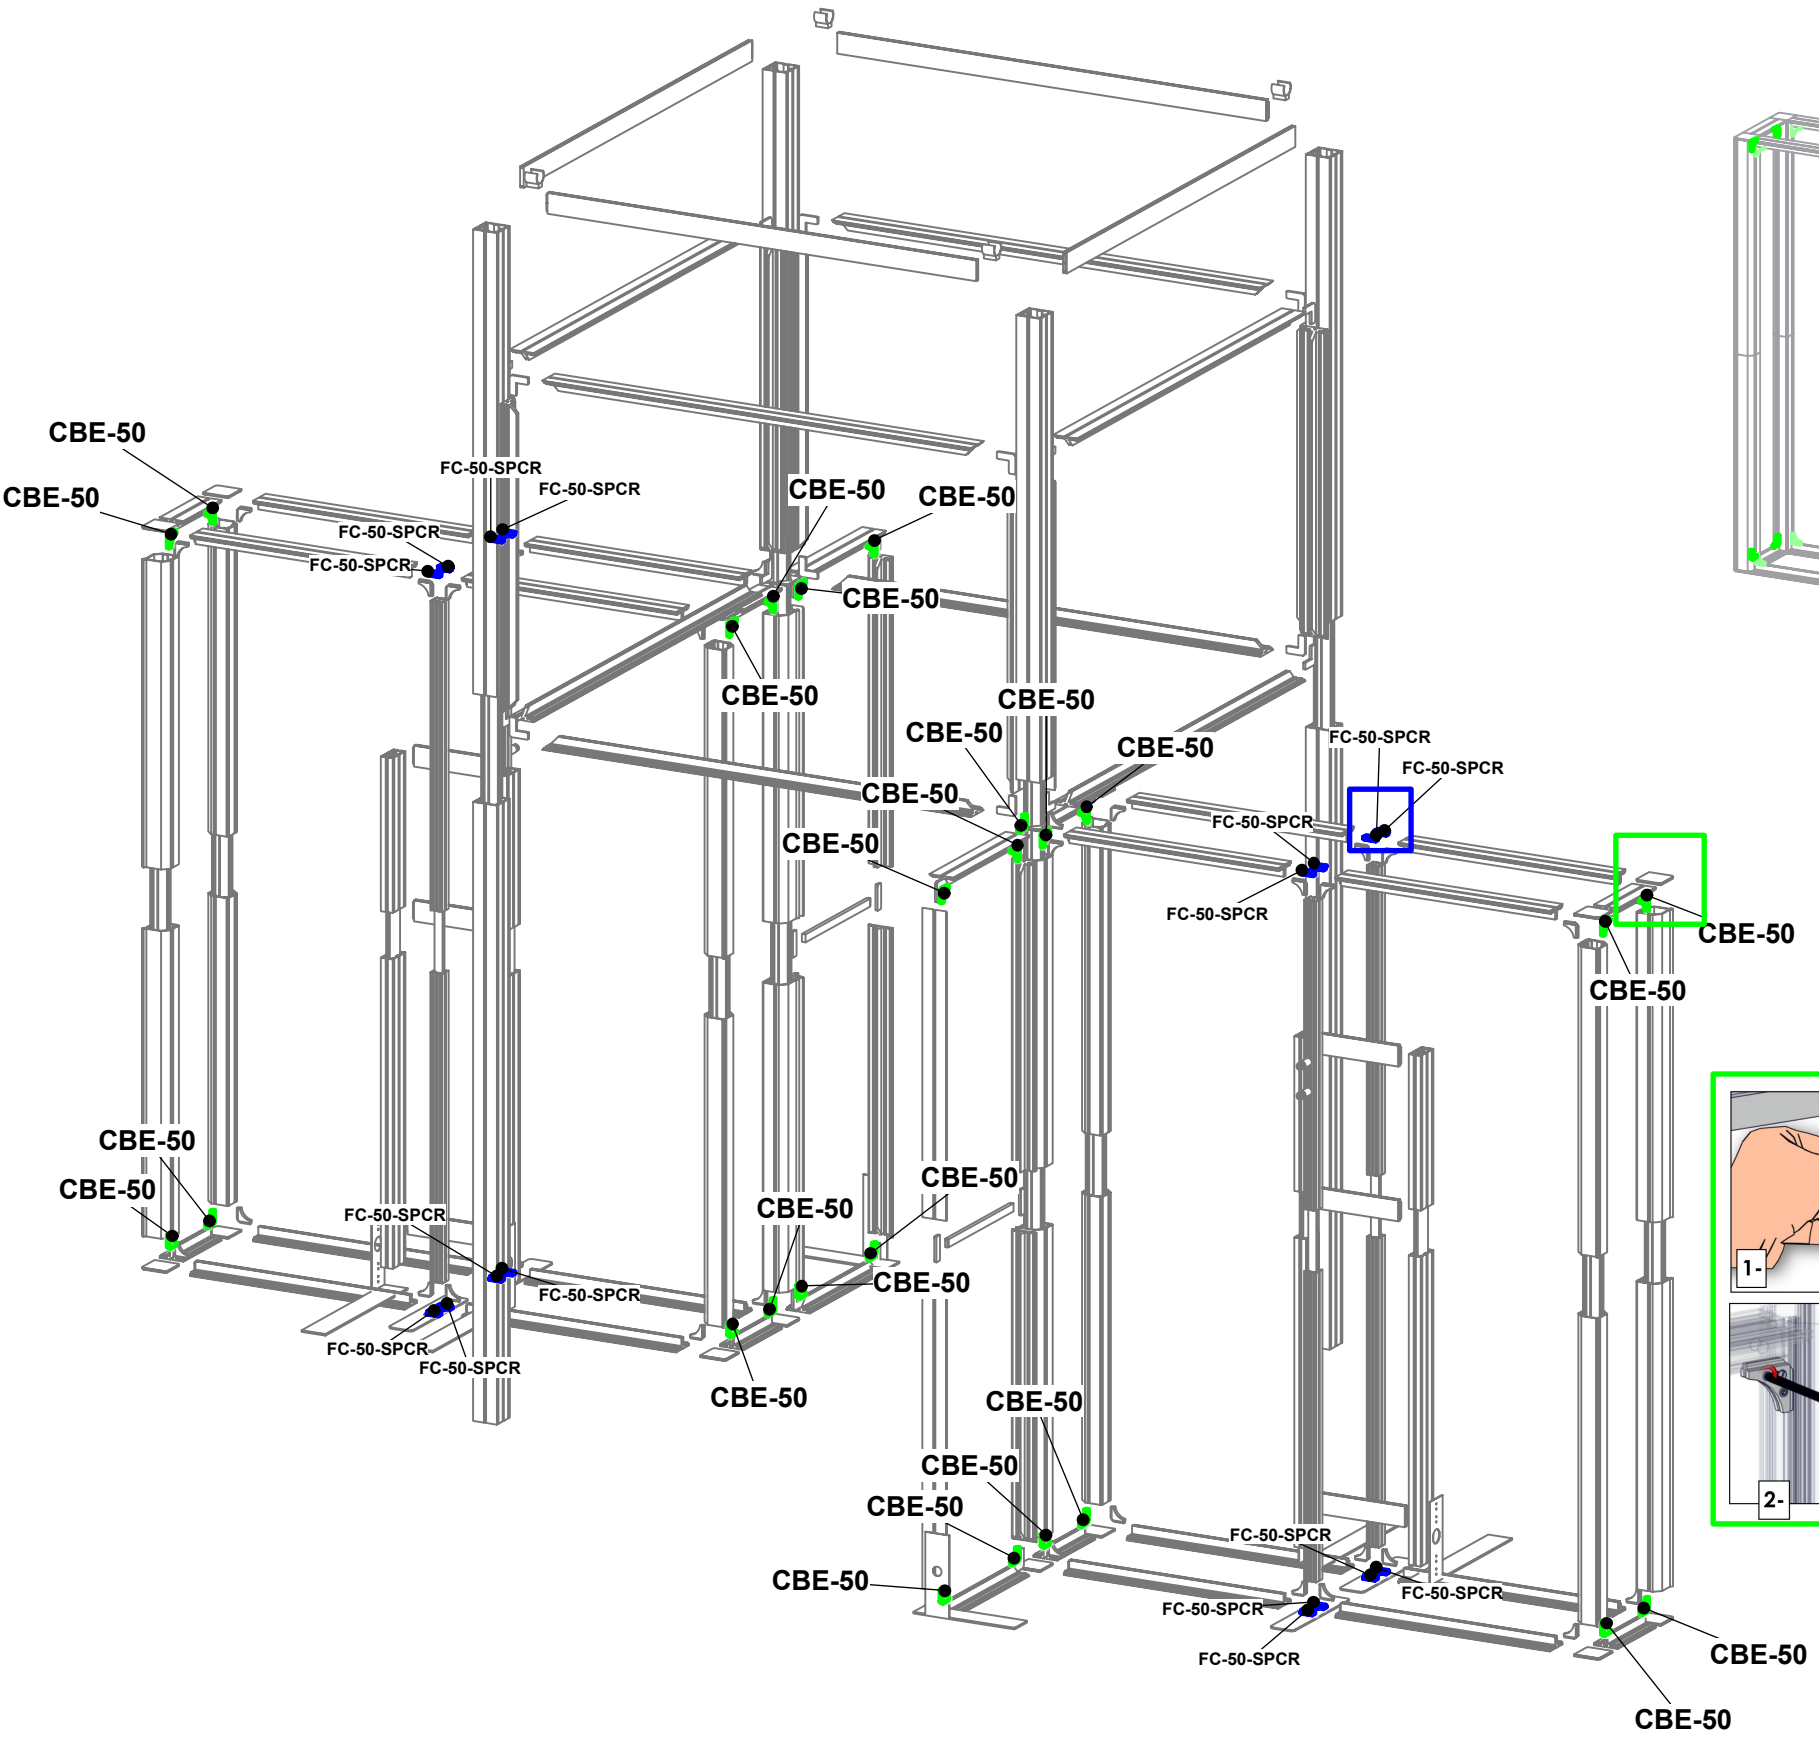


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

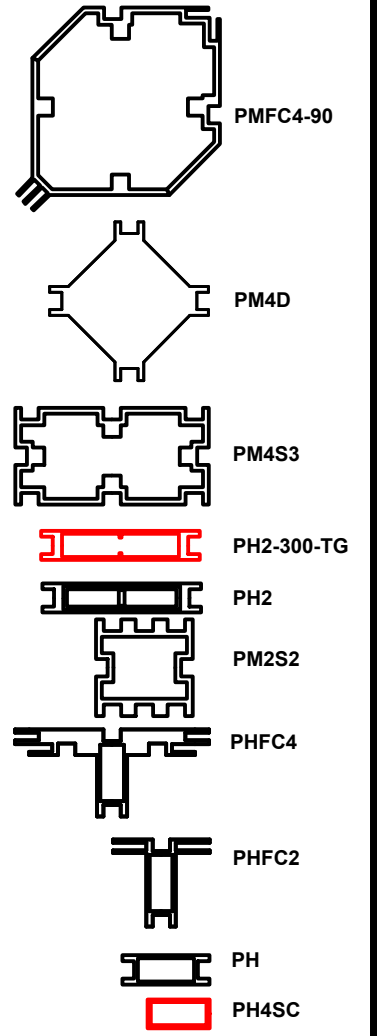


**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Code	#	Description
GRAPHIC B2	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B3	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B4	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B5	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A2	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A3	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A4	1	81.06"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A5	1	20.04"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES



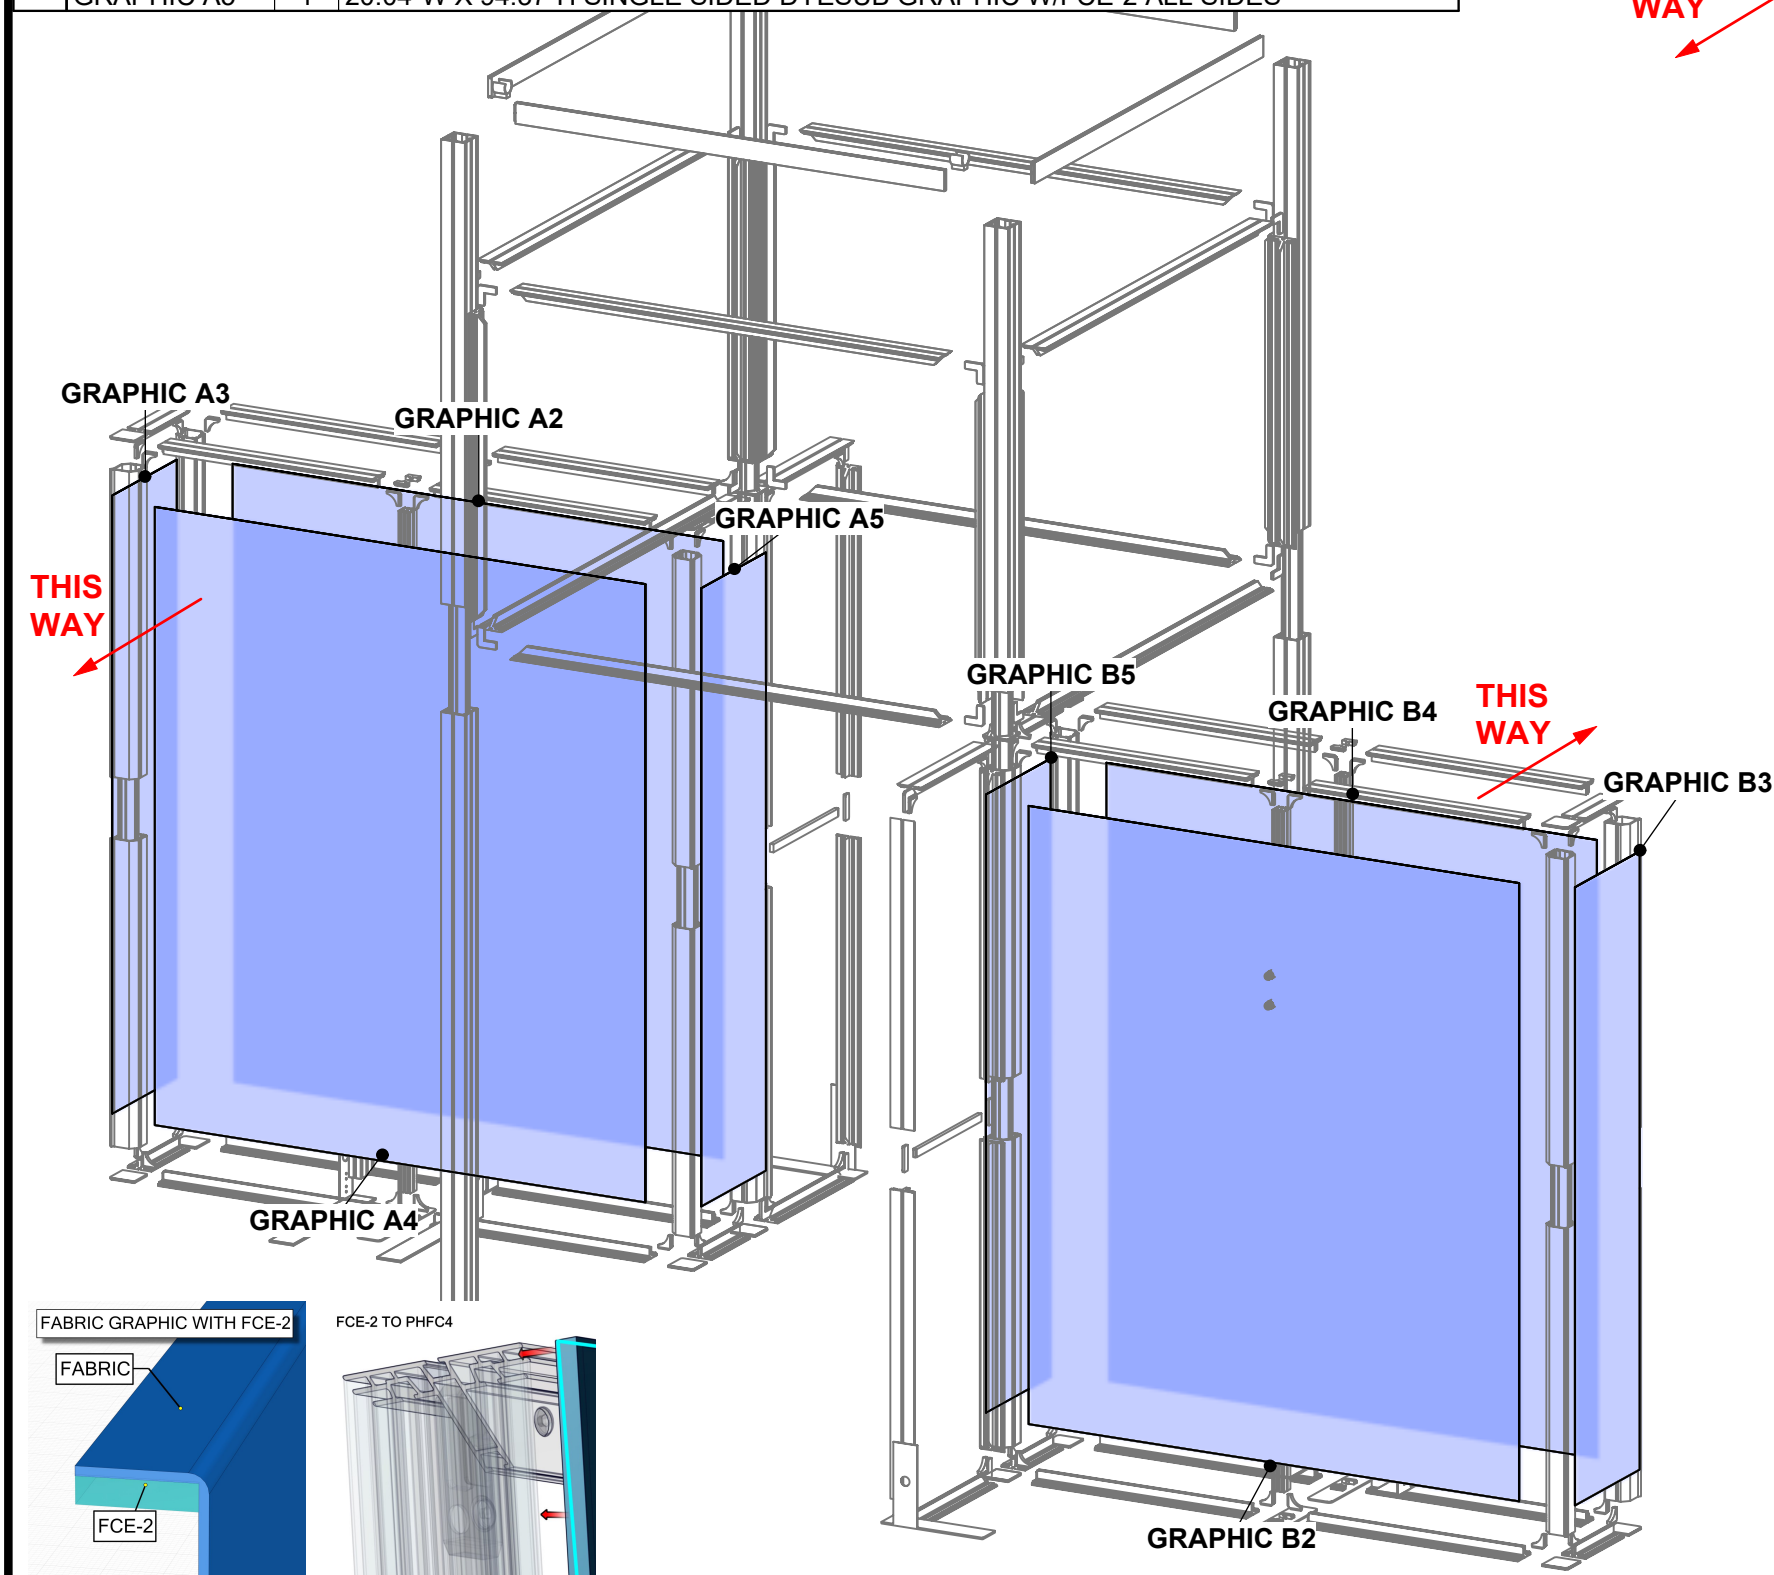


THIS WAY

THIS WAY

THIS WAY

THIS WAY

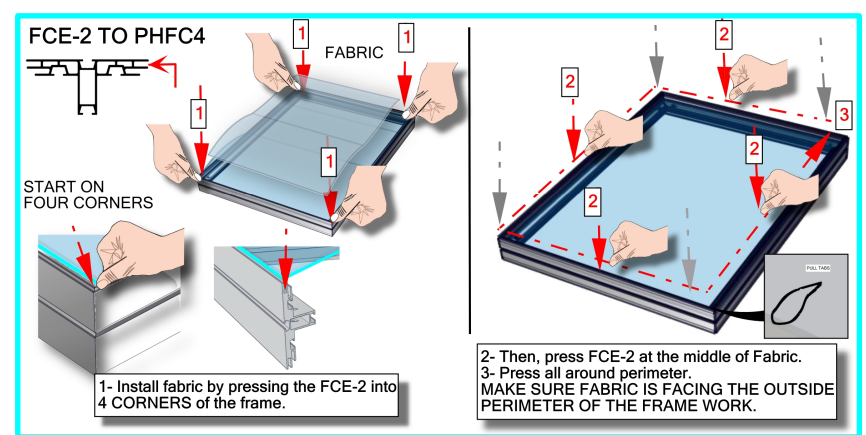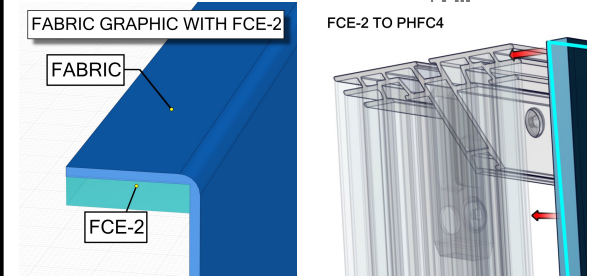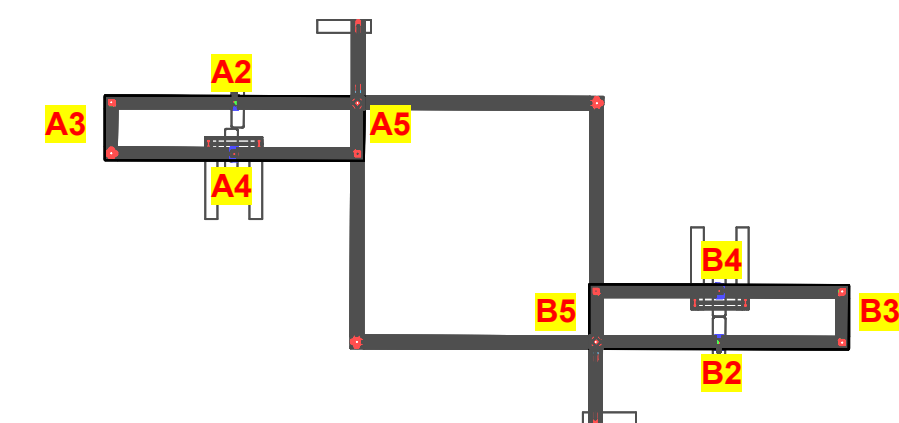

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

- 2400mm = (94 1/2")
  - 2100mm = (82 5/8")
  - 1800mm = (70 7/8")
  - 1500mm = (59")
  - 1200mm = (47 1/4")
  - 900mm = (35 1/2")
  - 600mm = (23 5/8")
  - 300mm = (11 7/8")
- Phone Line / Fax
  - Internet connection
  - Outlet
  - Main Drop (point of distrution)
  - Wire running under carpet

- PMFC4-90
- PM4D
- PM4S3
- PH2-300-TG
- PH2
- PM2S2
- PHFC4
- PHFC2
- PH
- PH4SC





**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Caution  
sharp edges  
on metal parts

Code	#	Description
GRAPHIC B6	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC B1	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A6	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
GRAPHIC A1	1	23.5"W X 94.37"H SINGLE SIDED DYESUB GRAPHIC W/FCE-2 ALL SIDES
MM-M-T	2	EXTRUSION MOUNTED MEDIUM MONITOR BRACKET AND MOUNTING HARDWARE

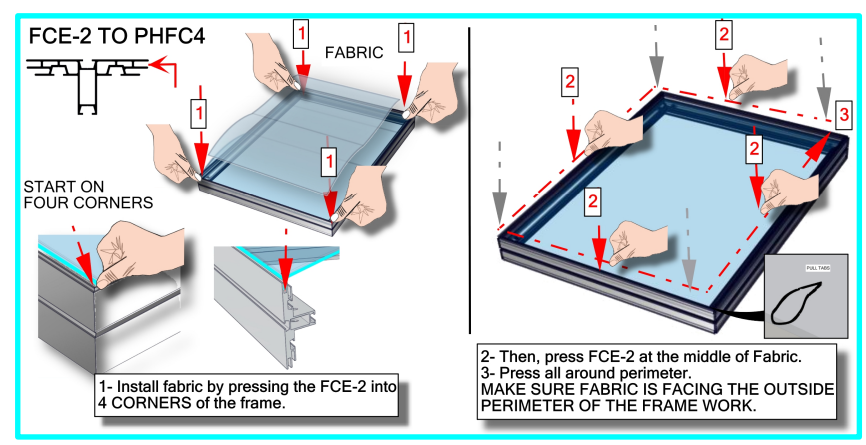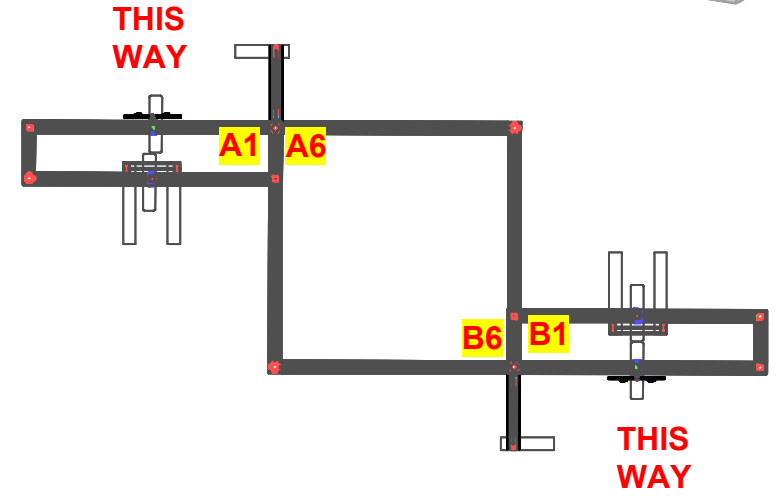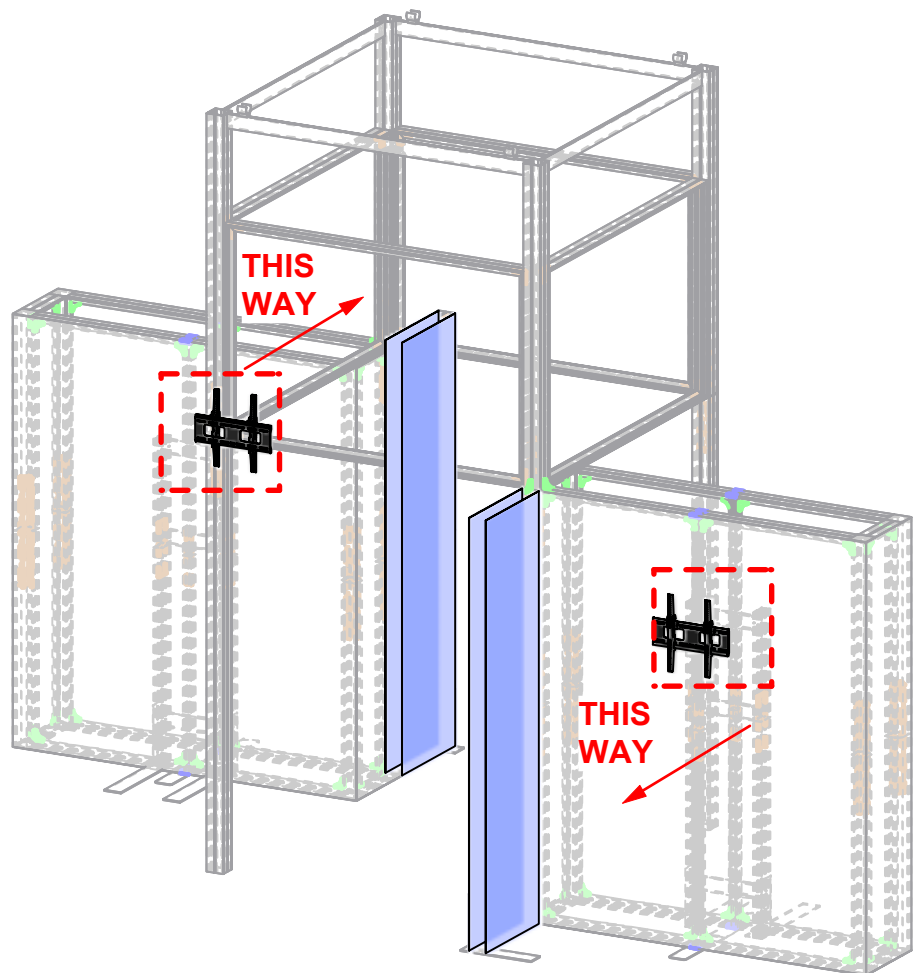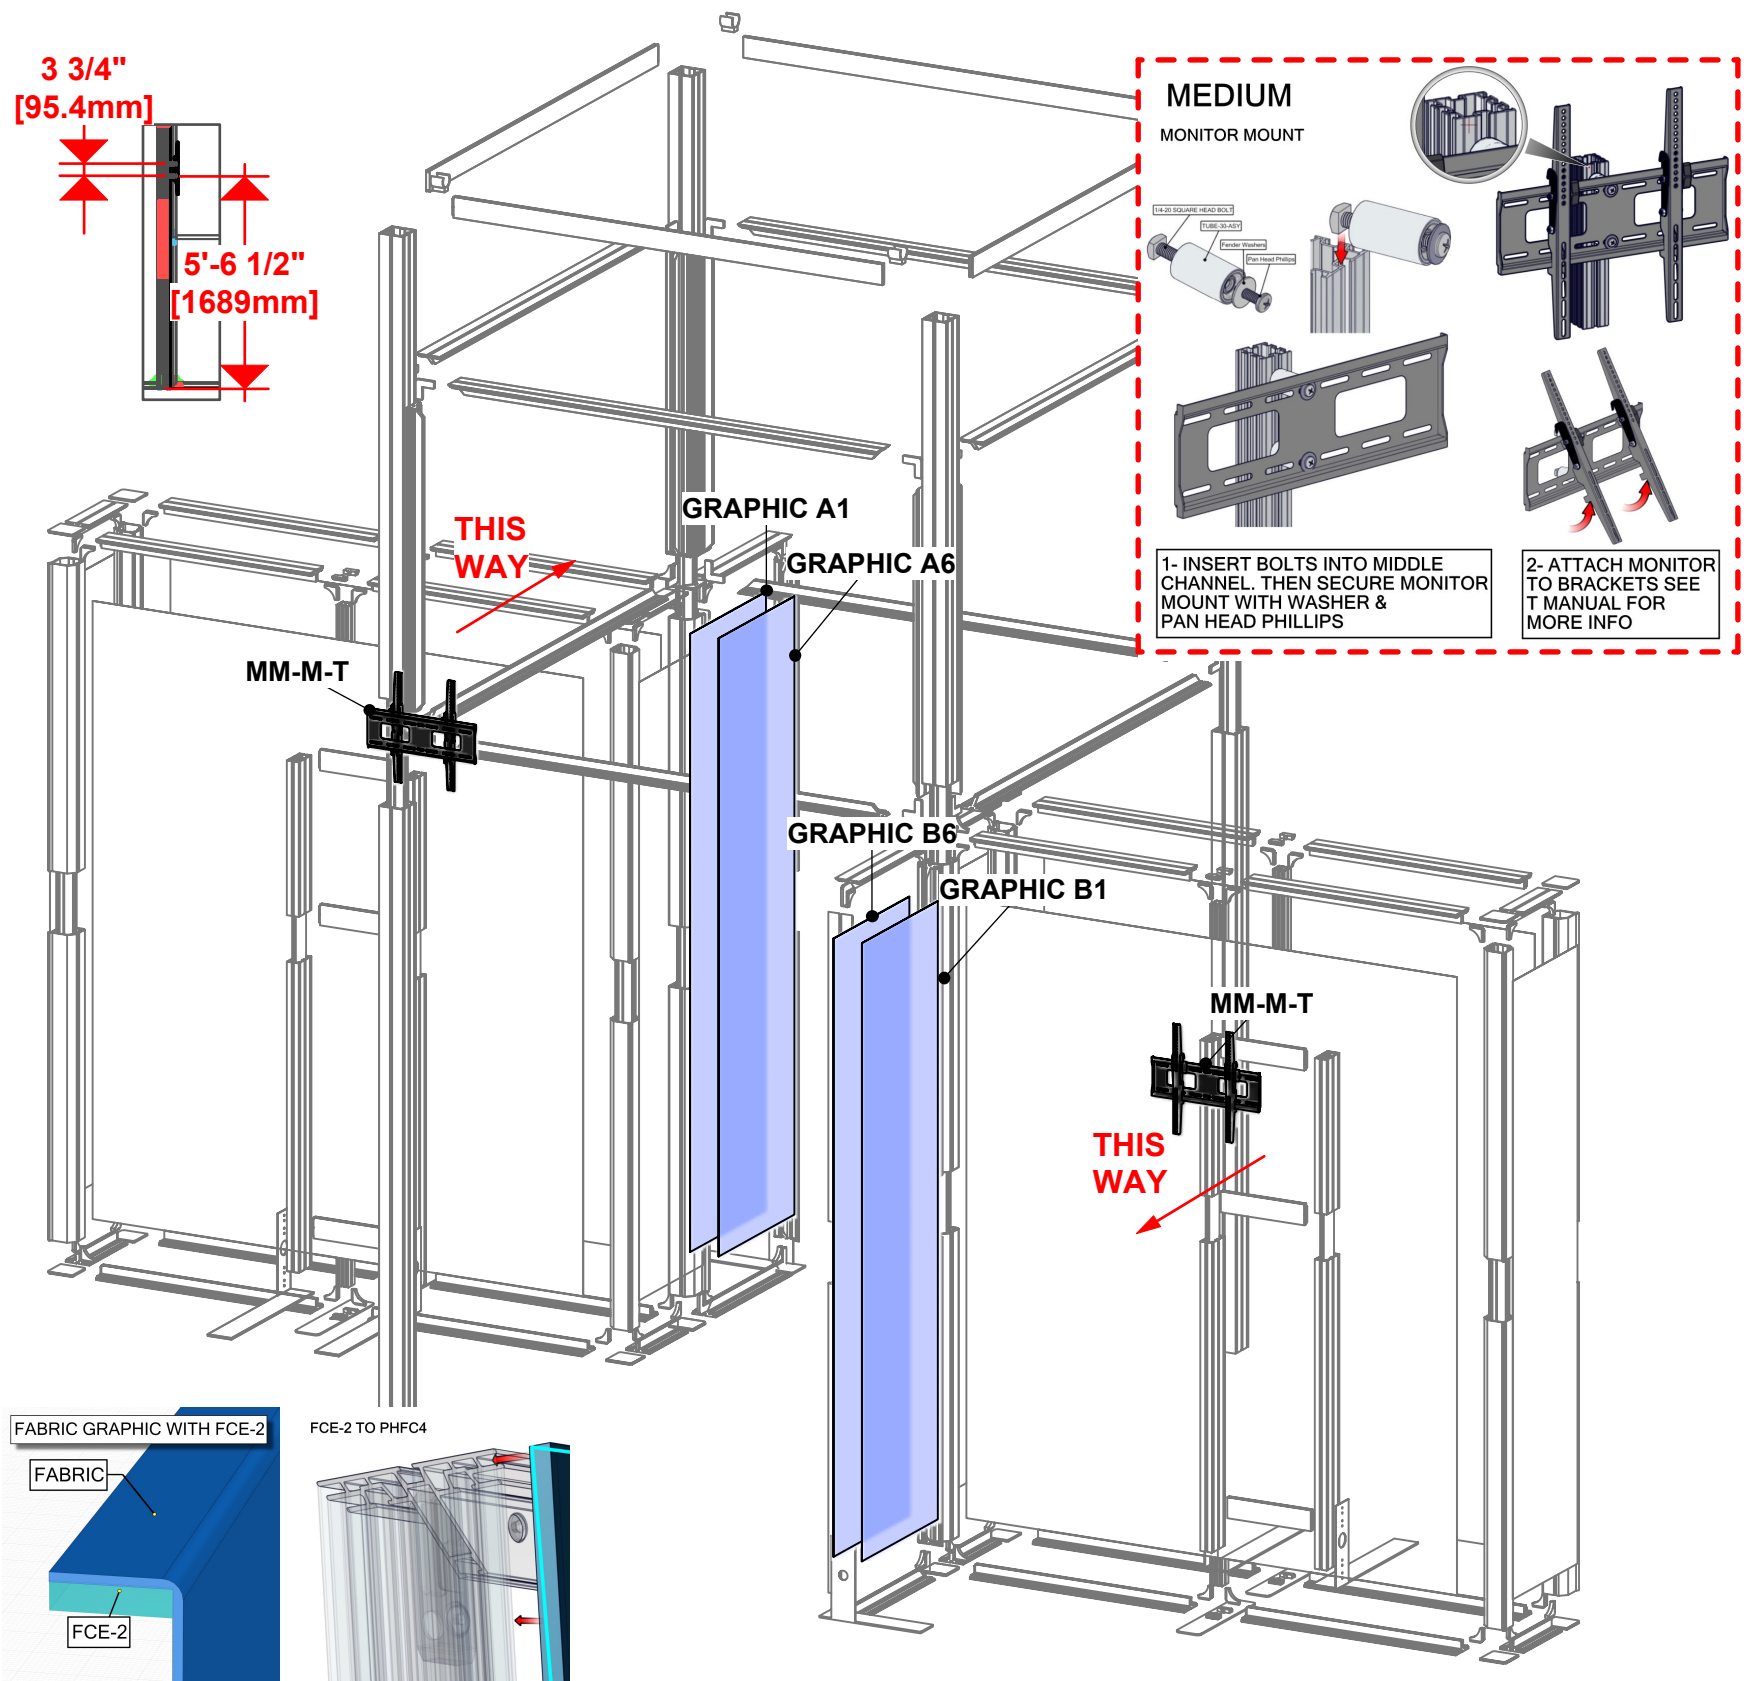


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distruption)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet ---

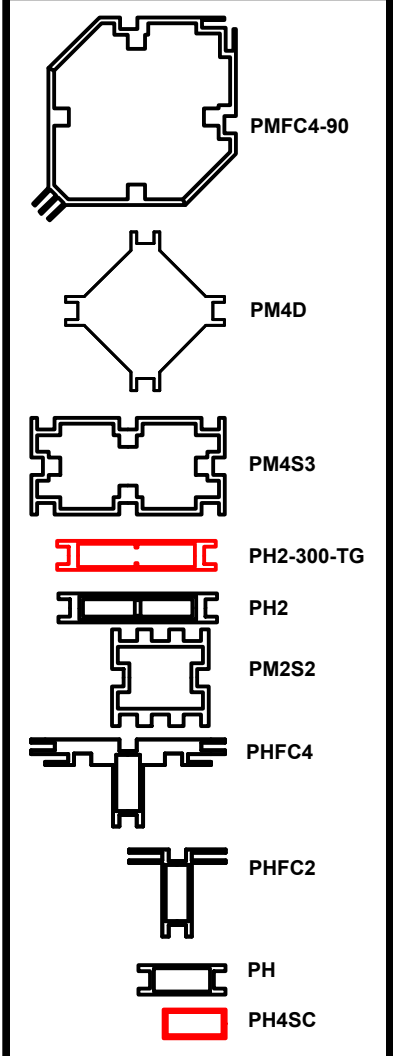

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS






**Caution**  
sharp edges on metal parts

**15**

Code	#	Description
LN605-EN	12	MOLDED END CAP FOR PH EXTRUSION
R131	12	400MM PH EXTRUSION WITH LOCK ONE END AND SIDE CAM LOCK

**WARNING!**  
Locks should ONLY be turned a quarter turn, so as not to STRIP the locks by over torquing them

**LOCK EXTRUSION BY USING 5MM ALLEN KEY**

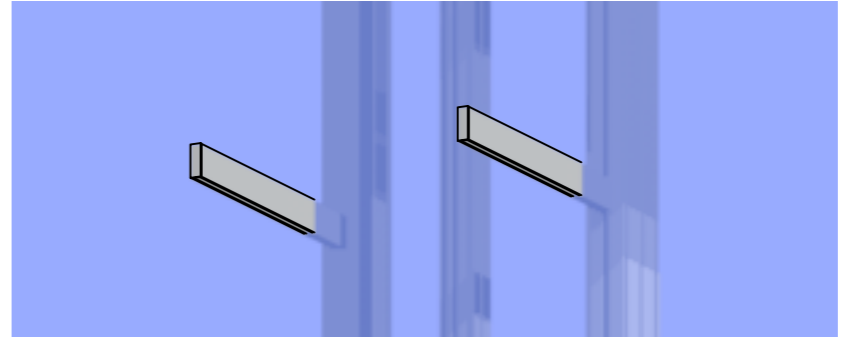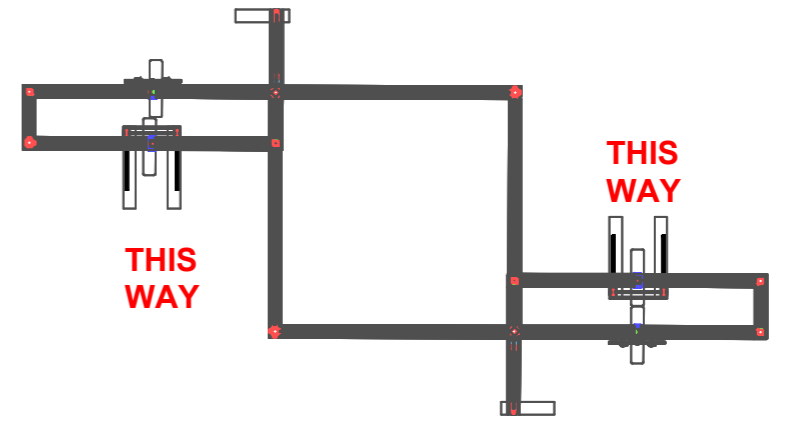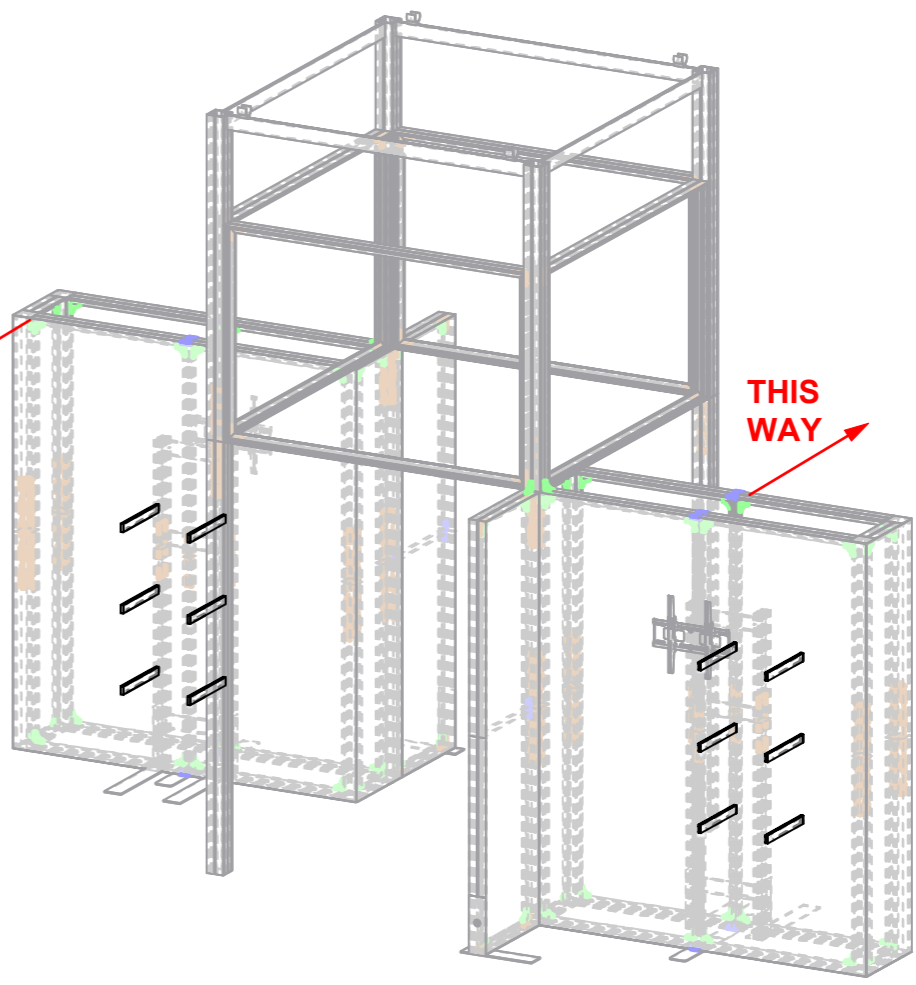
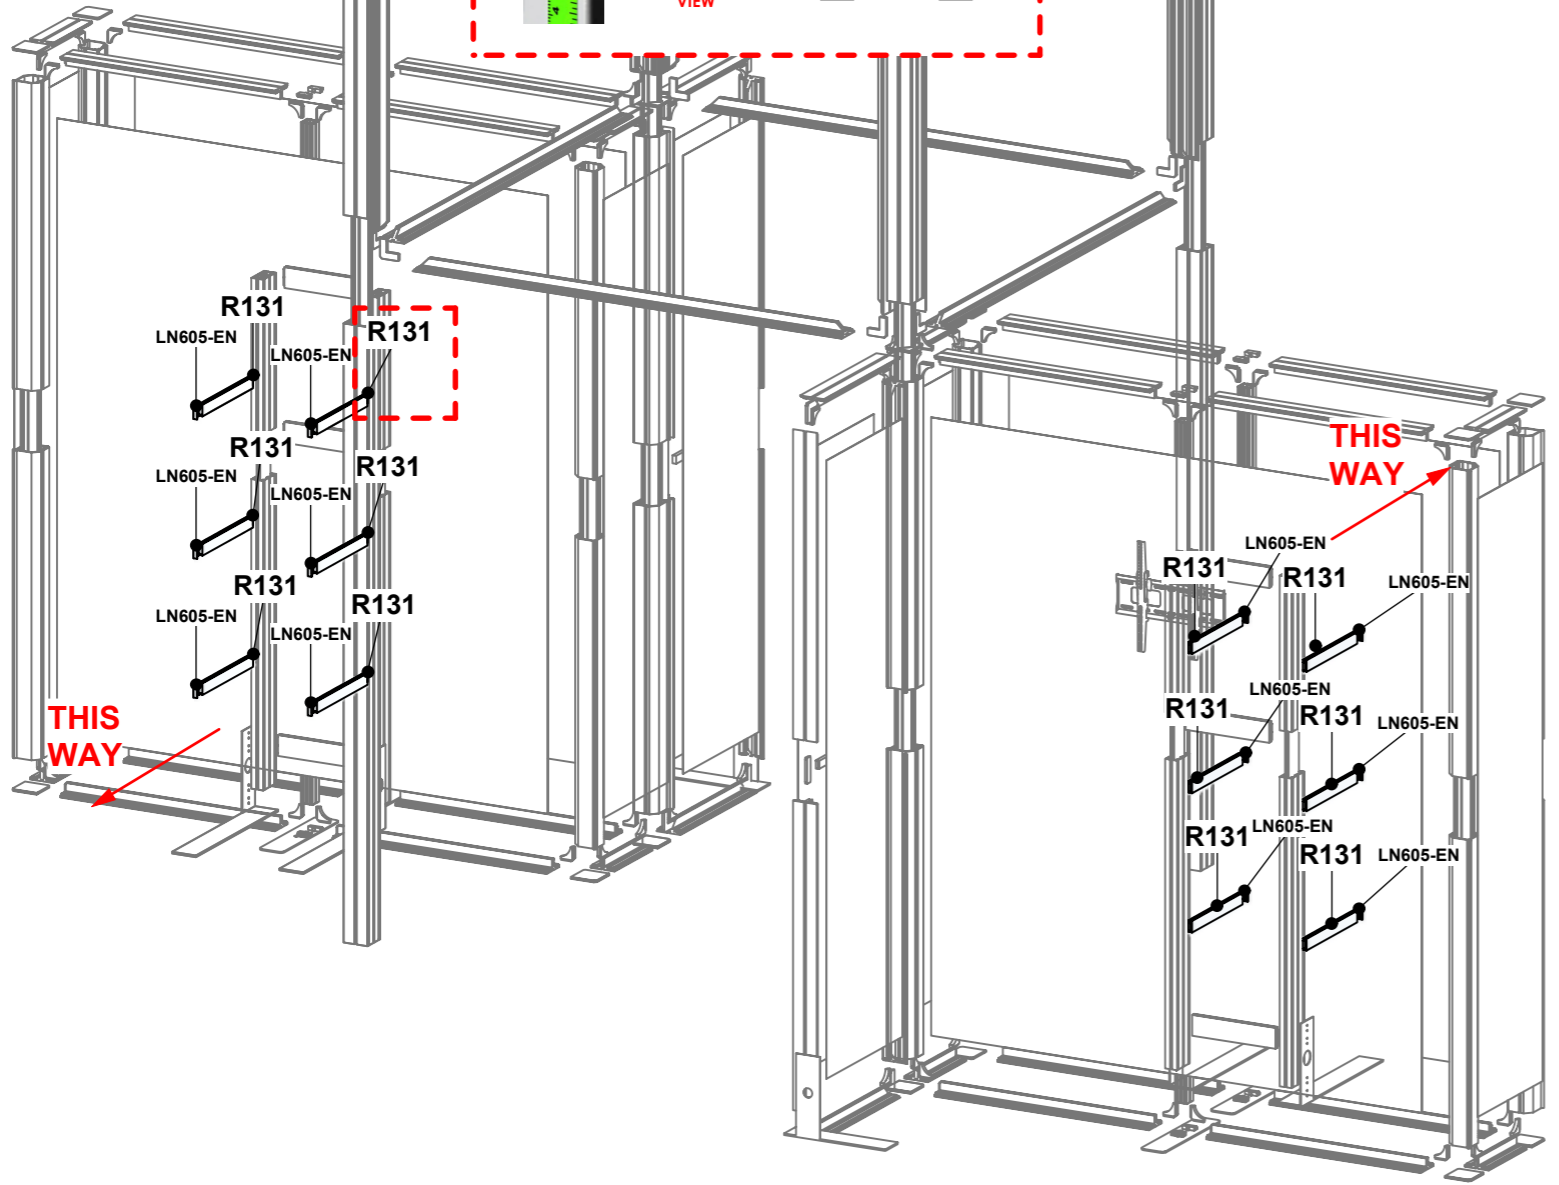
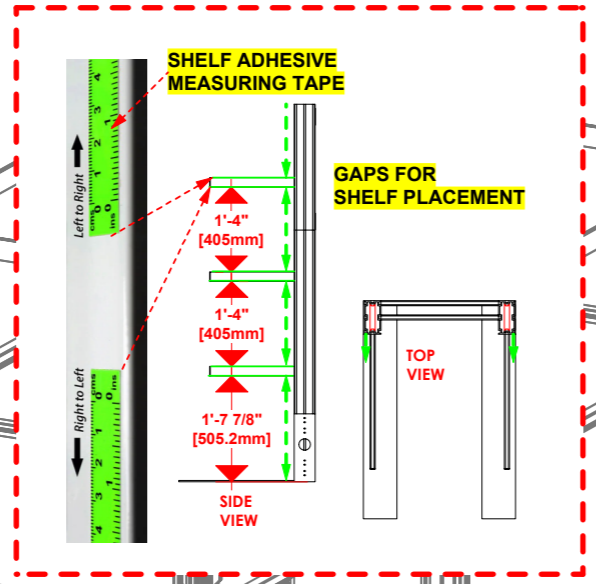









1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet ---

-  PMFC4-90
-  PM4D
-  PM4S3
-  PH2-300-TG
-  PH2
-  PM2S2
-  PHFC4
-  PHFC2
-  PH
-  PH4SC





**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Caution  
sharp edges  
on metal parts

Code	#	Description
PM4S3-MK-SHELF	6	750MM X 300MM X 30MM MONITOR KIT SHELF

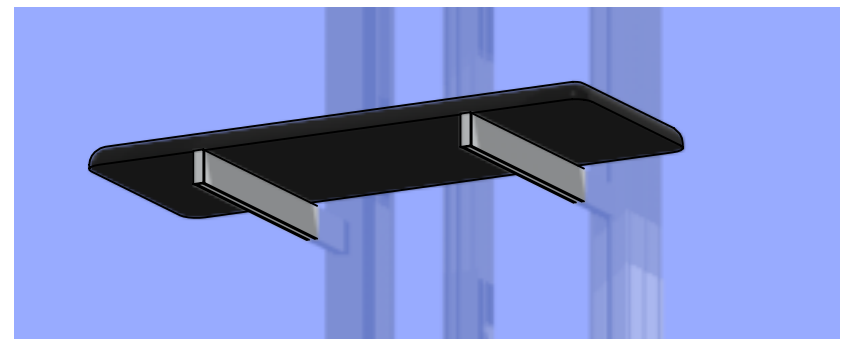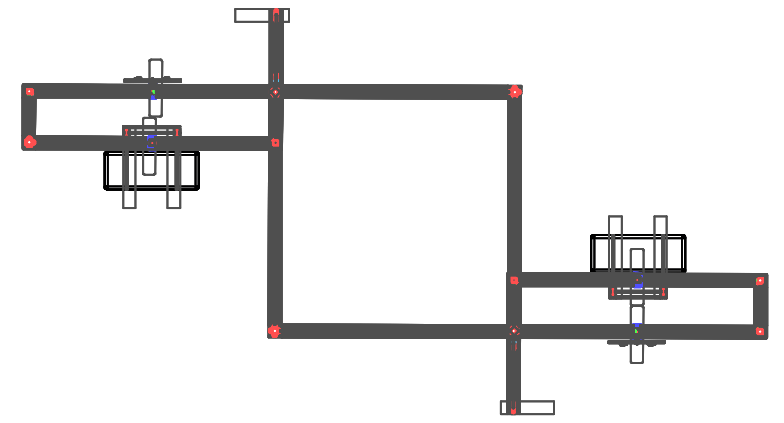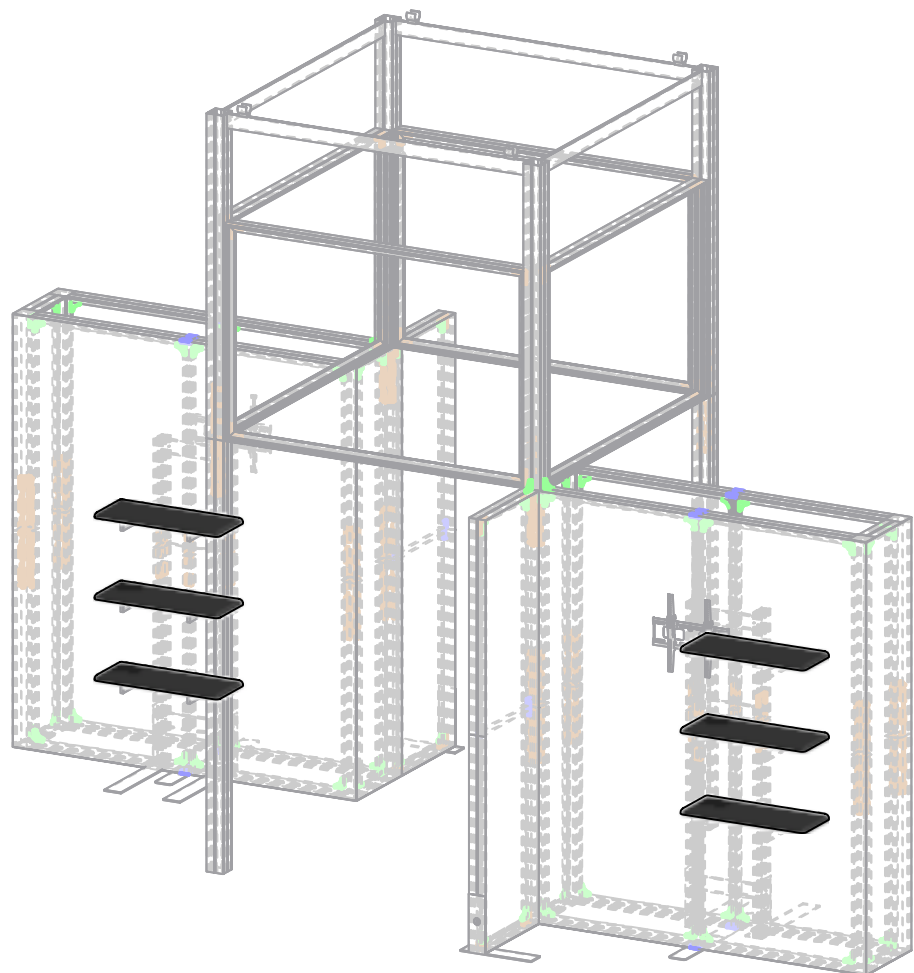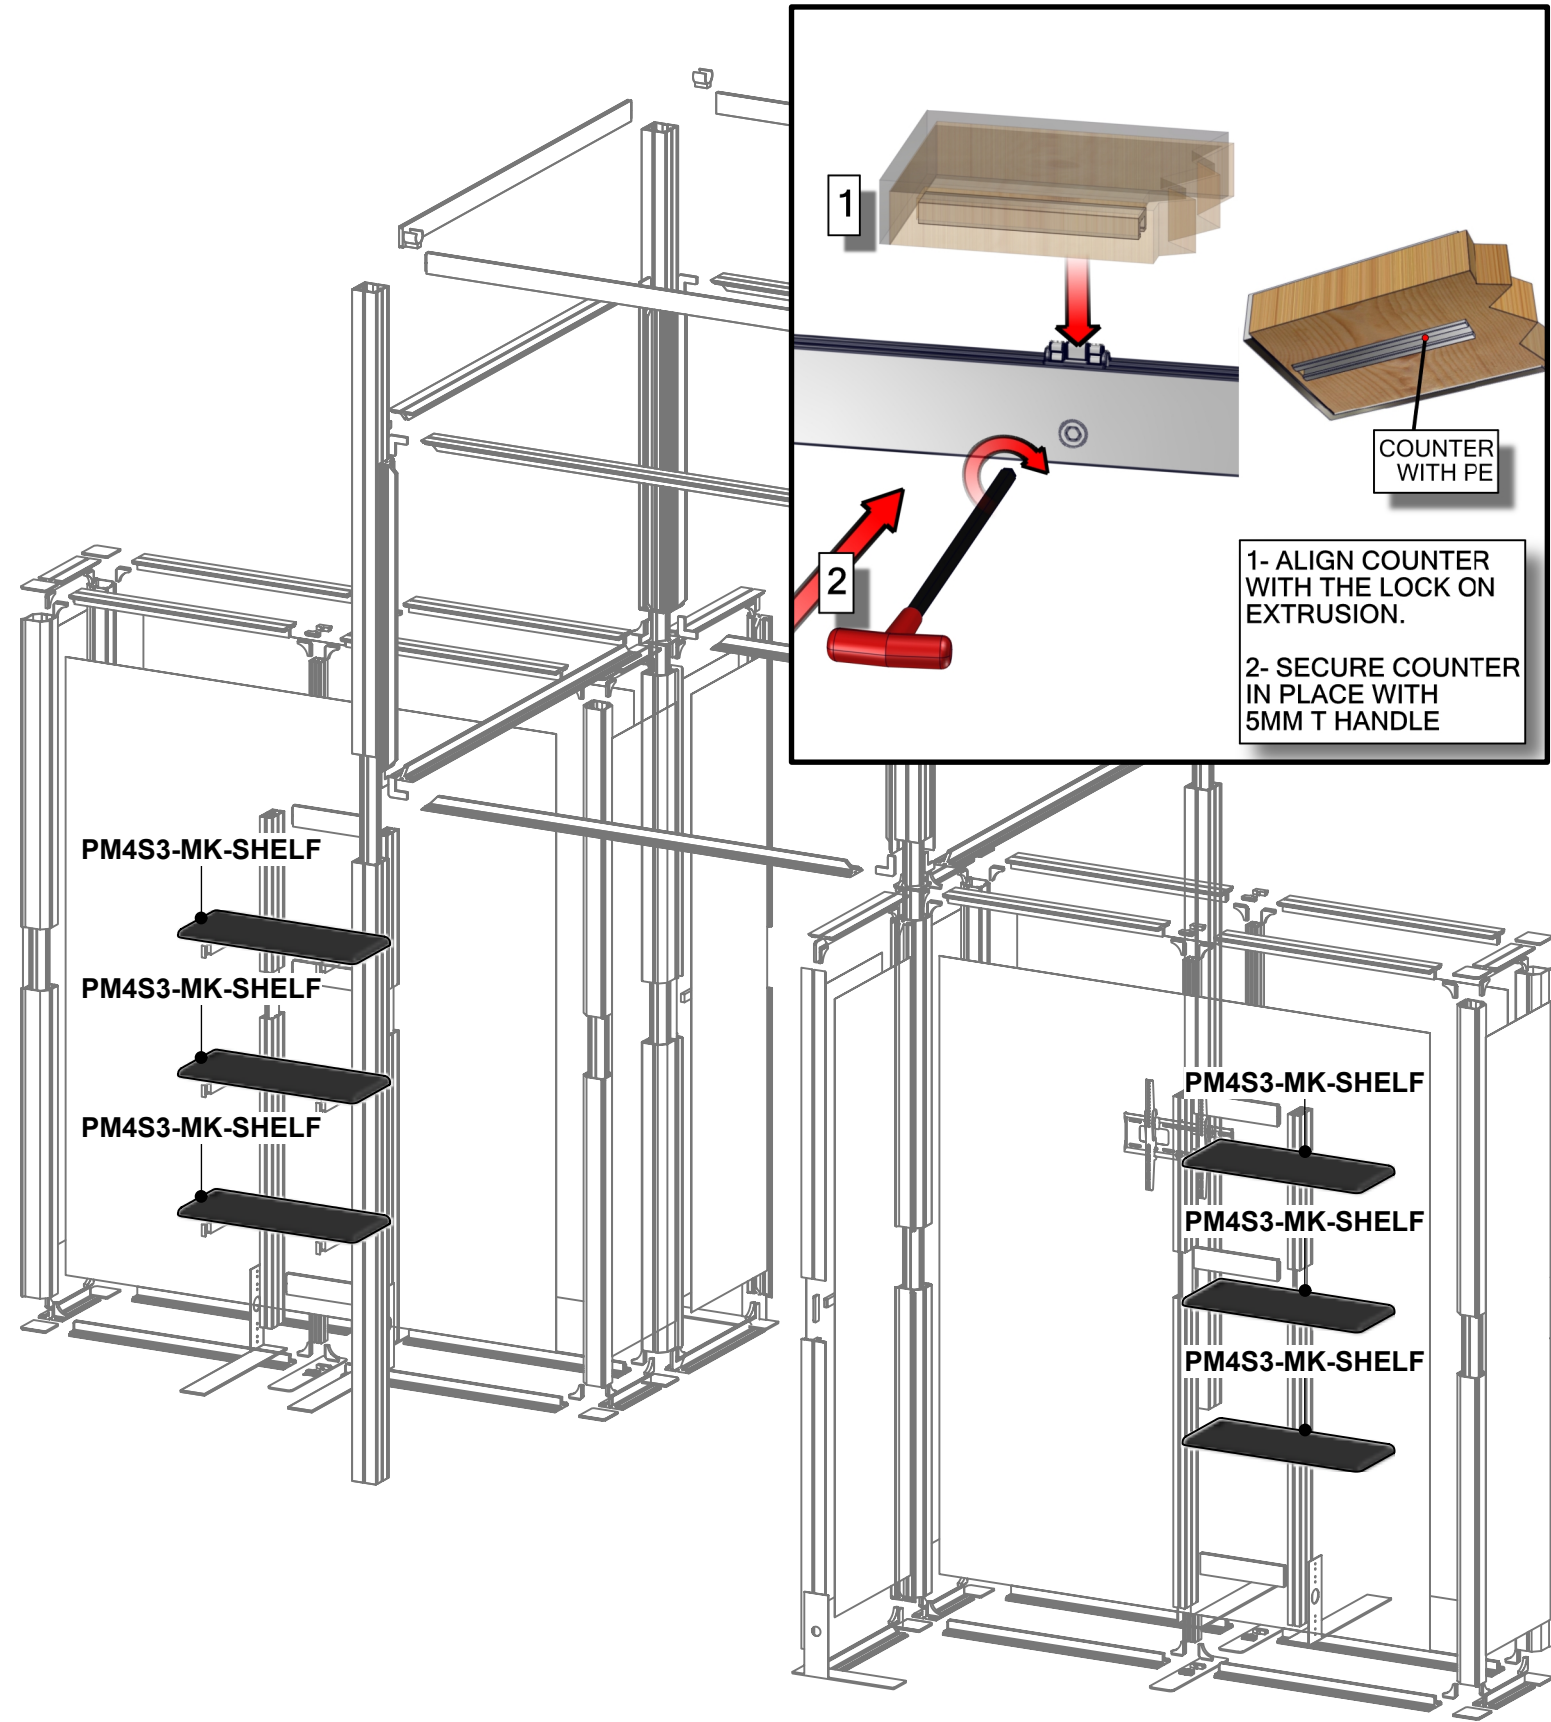


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of disconnection)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

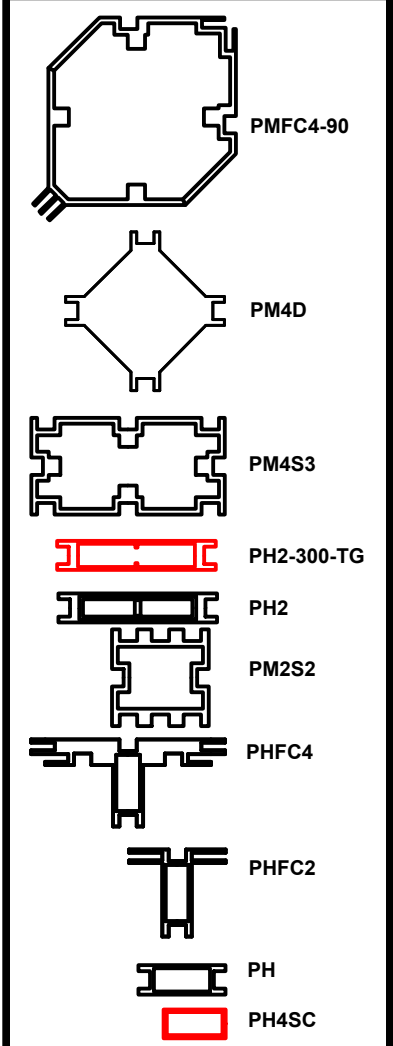





**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS




Caution  
sharp edges  
on metal parts


Code	#	Description
R141	4	450MM X 1000MM LOCK PANEL
PT-1000	2	1000MM LENGTH OF PT EXTRUSION
P90S-1000	6	1000MM P90S EXTRUSION
R132	2	600MM X 1000MM LOCK PANEL
R143	4	90MM PH EXTRUSION WITH LOCKS BOTH ENDS
R133	2	600MM(W) X 1000MM(V) LOCK CABINET DOOR PANEL

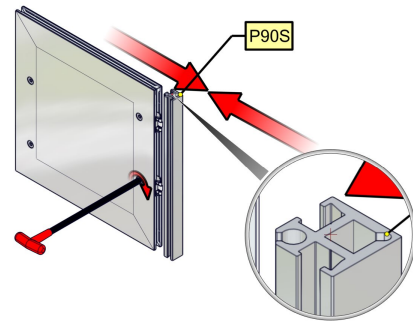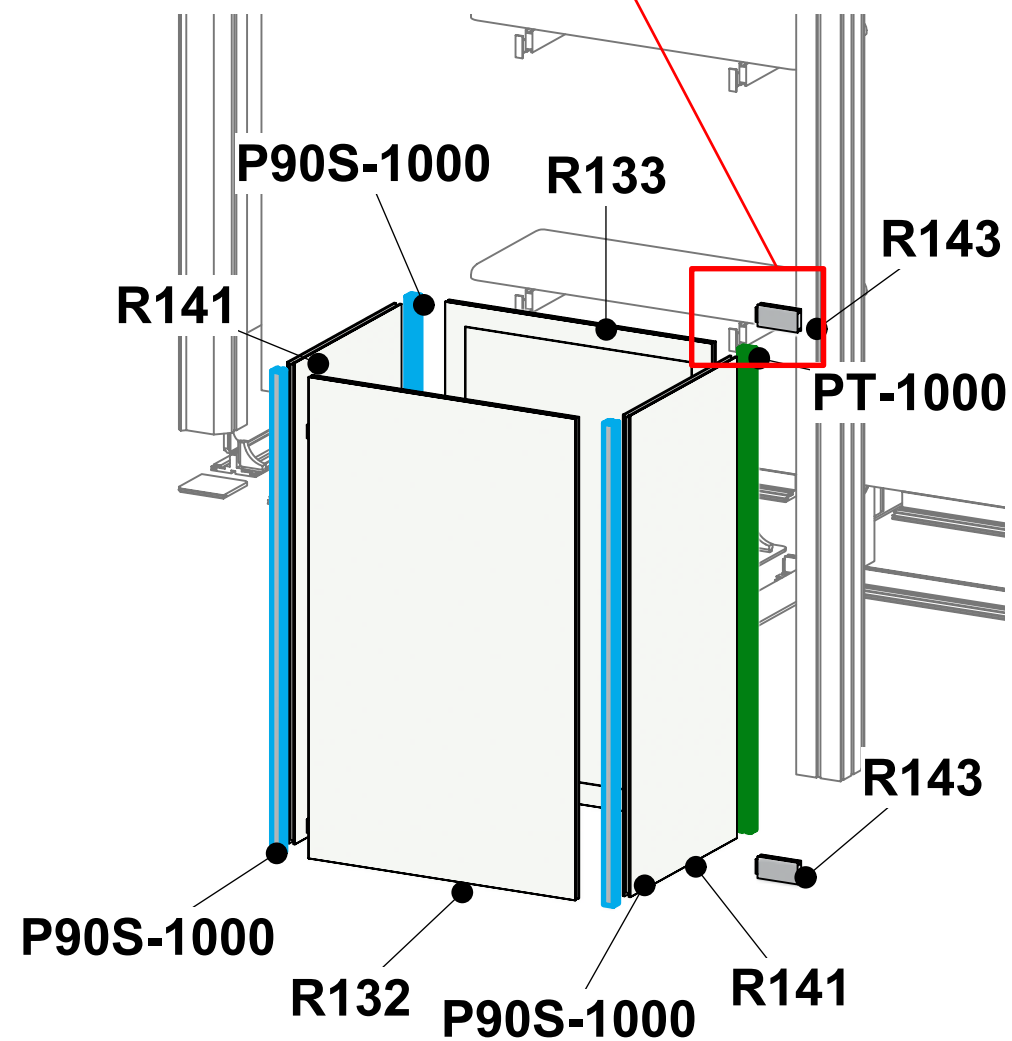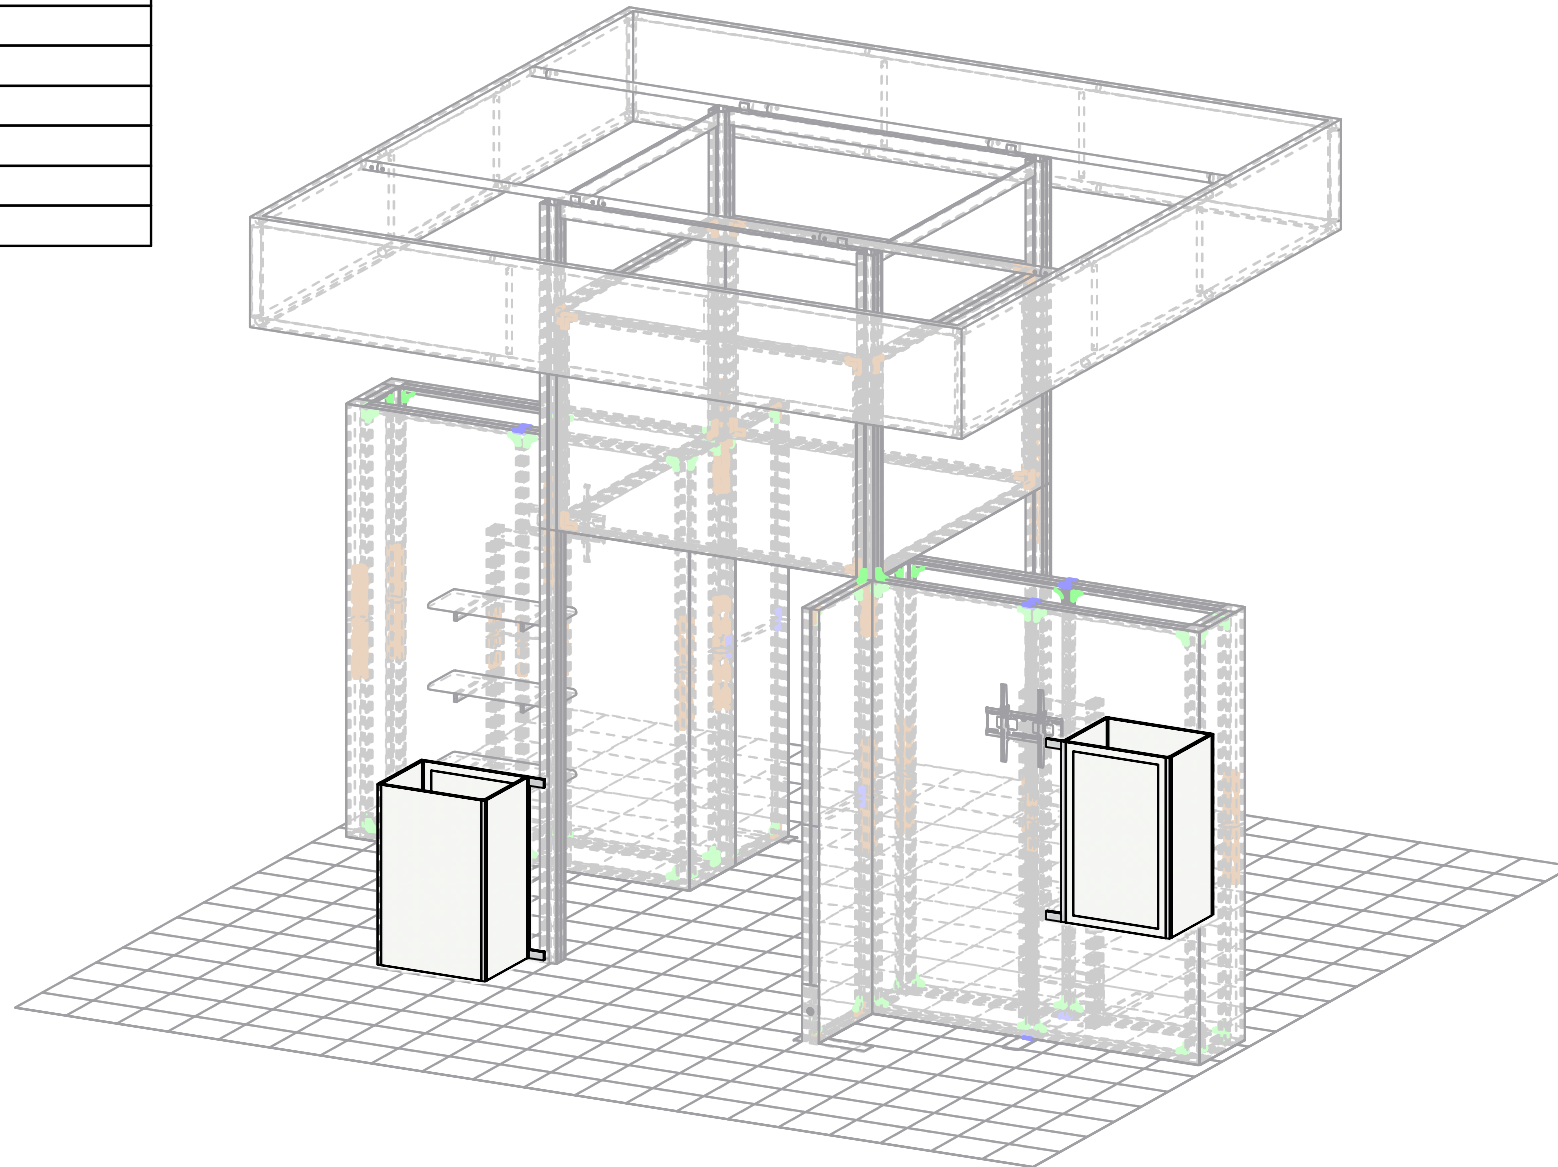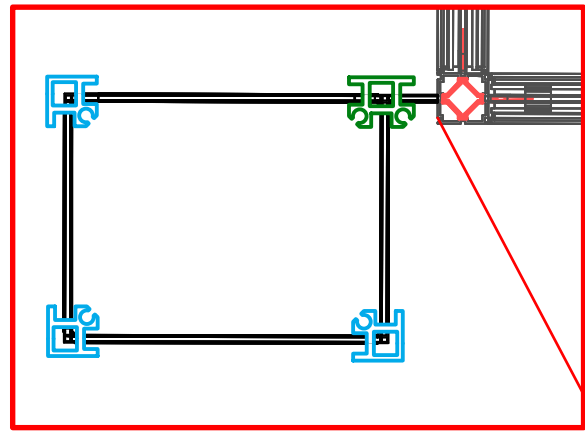

Lock Panel by using 5mm T-Handle

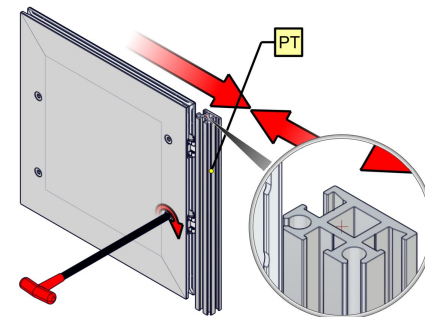

Lock Panel by using 5mm T-Handle

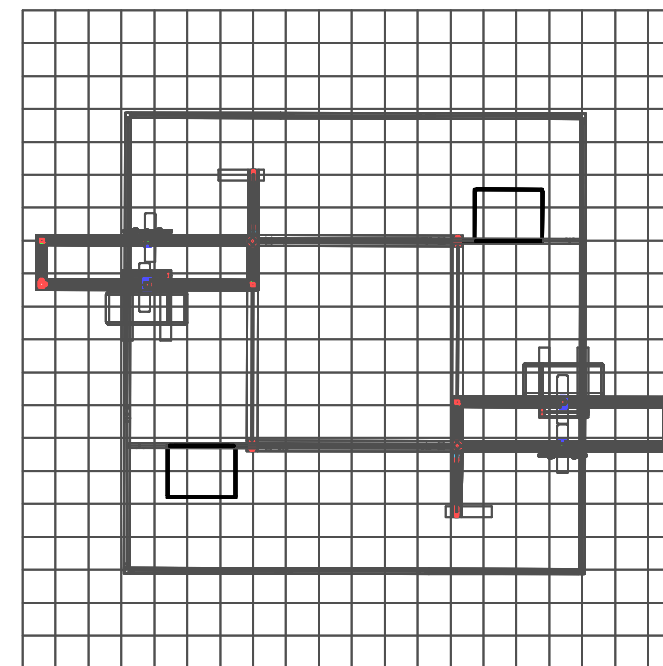


1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

--- Wire running under carpet

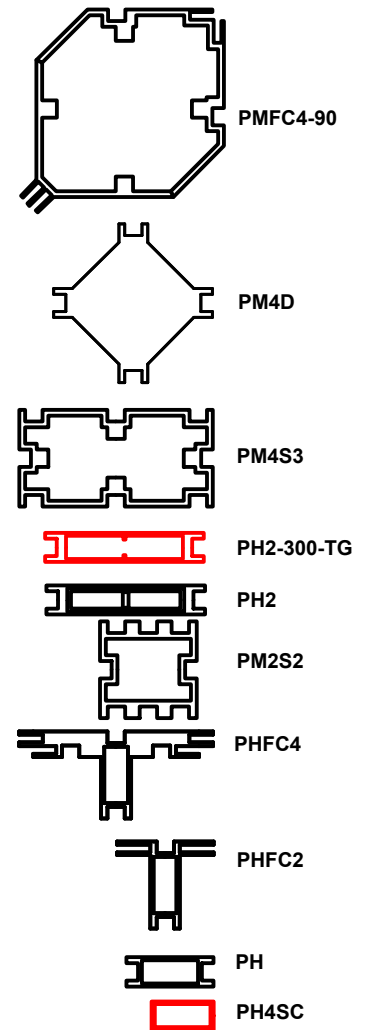





**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Caution  
sharp edges  
on metal parts


Code	#	Description
HPC-15-TOP-B	2	Hybrid 15 BLACK Counter Top Only, 660mm x 510mm

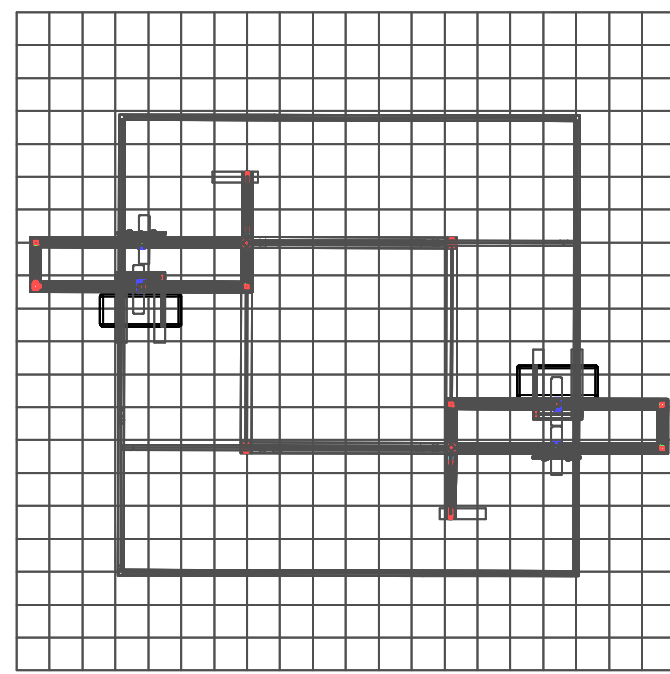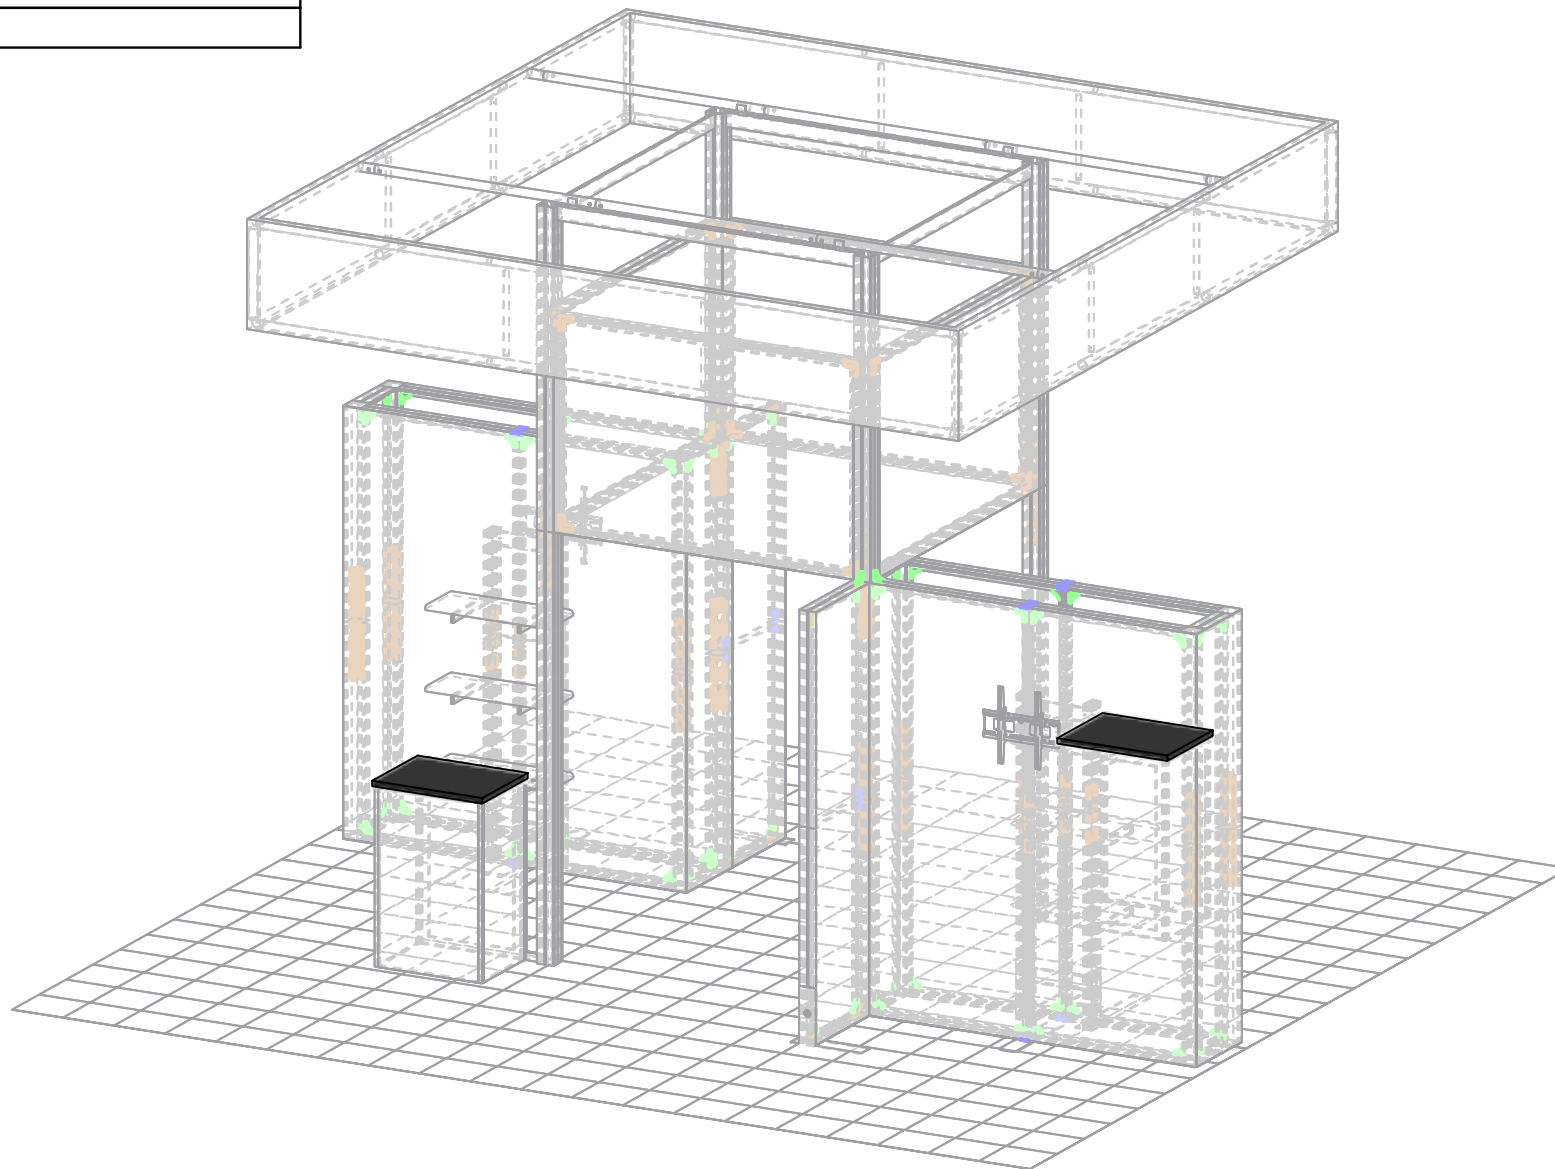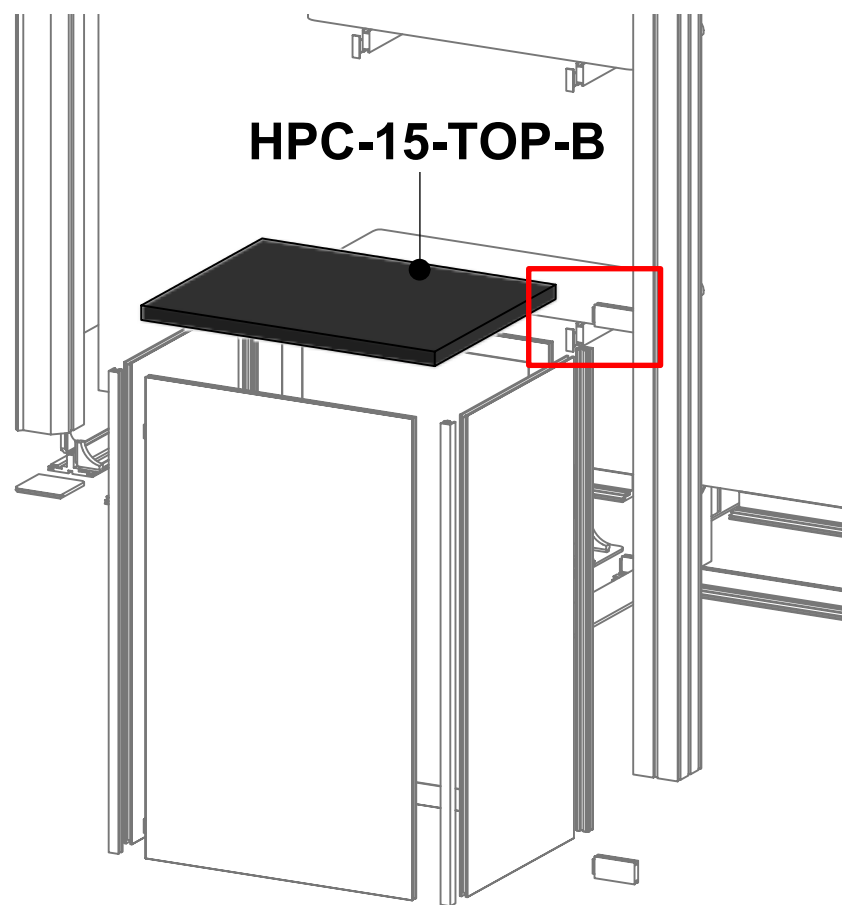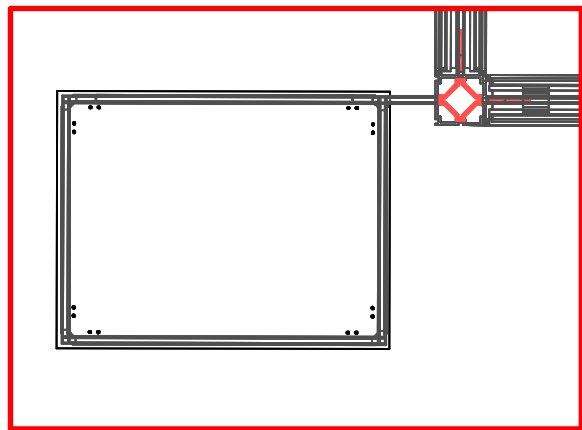

1. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

- 2400mm = (94 1/2")
  - 2100mm = (82 5/8")
  - 1800mm = (70 7/8")
  - 1500mm = (59")
  - 1200mm = (47 1/4")
  - 900mm = (35 1/2")
  - 600mm = (23 5/8")
  - 300mm = (11 7/8")
- Phone Line / Fax
  - Internet connection
  - Outlet
  - Main Drop (point of distrution)
- Wire running under carpet

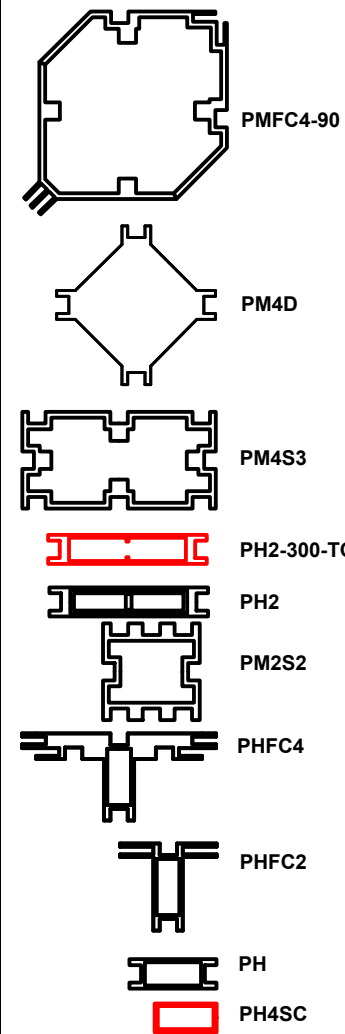

**HYBRID PRO RENTAL KIT**

Title: SET-UP INSTRUCTIONS



Caution  
sharp edges  
on metal parts